




NOTE: Wire dimming conductors as Class 1

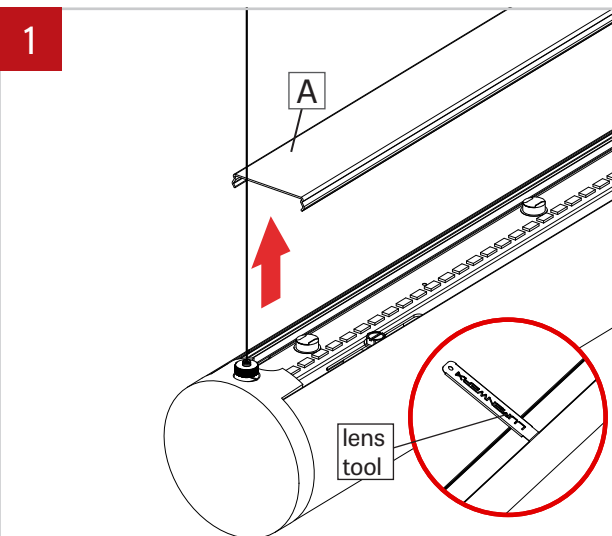


Make sure the power to the fixture is turned off.
Remove the top lens (A) with the included lens tool.

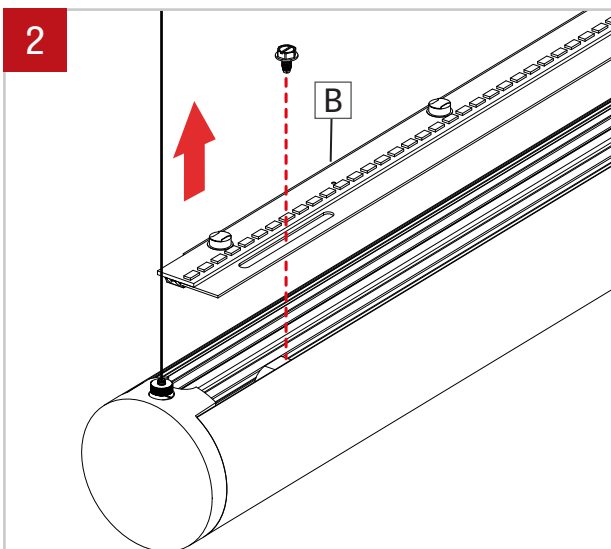


Unscrew and remove the cartridge (B).

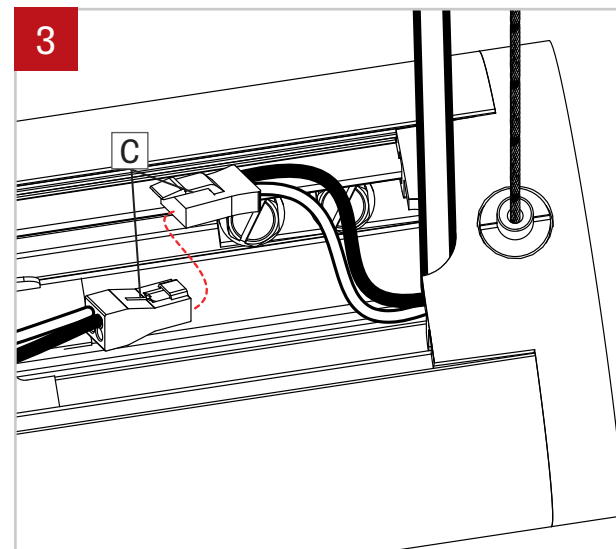


Disconnect quick connect (C).

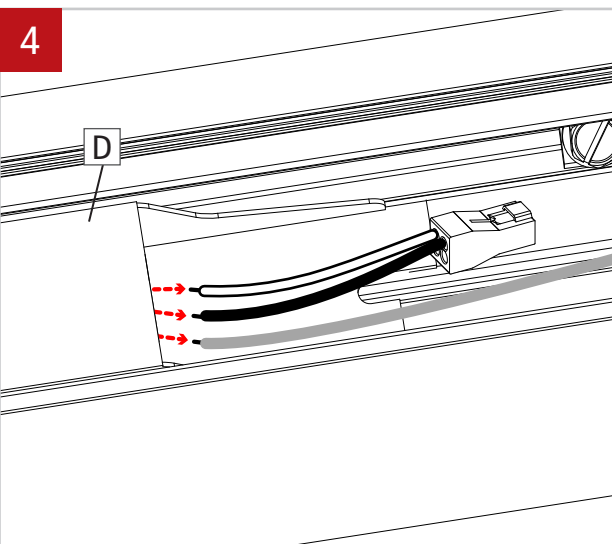

Disconnect the DC LED wires and the AC wires from the driver (D).

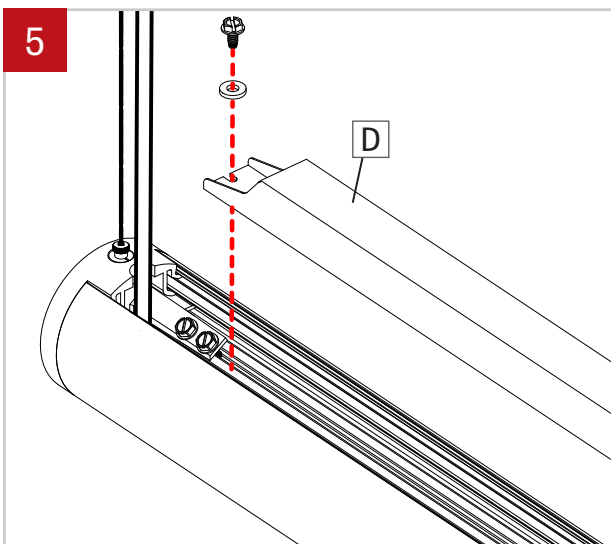


Unscrew the driver (D) from the fixture. Replace the driver (D) and make electrical connections.

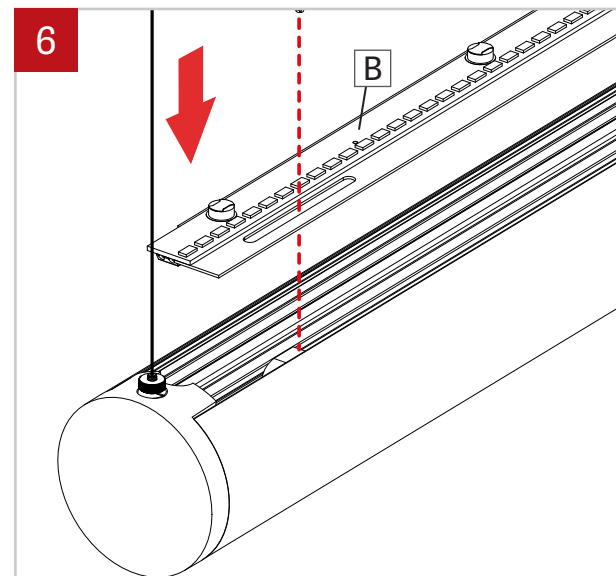

Screw the cartridge (B) back in place.

7

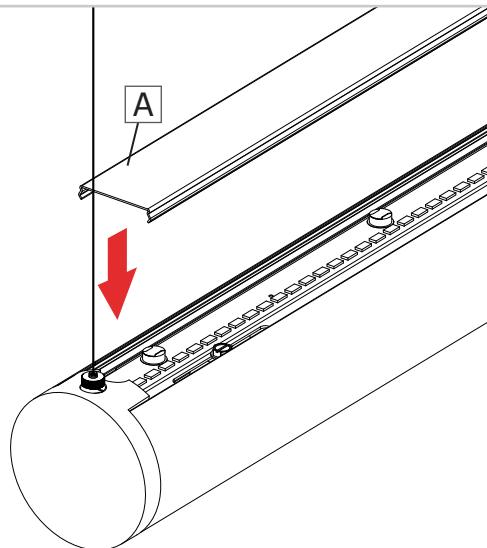

Put the lens (A) back in place.