

SHALO ULTRA 1.5

Surface - Wood slat



This product must be installed in accordance with the National Electrical Code and all applicable local codes, by a person familiar with the construction and operation of the product, and the hazards involved. Proper grounding is required for safety.

Ce produit doit être installé suivant le code national de l'électricité, ainsi que tous les codes locaux applicables, par une personne familière avec la construction et le fonctionnement du produit, ainsi que tous les risques qui y sont associés. La mise à terre électrique est obligatoire pour la sécurité.




Wire dimming conductors as Class 1.



For electrical connections, please refer to the [wiring diagram guide](#).



For remote driver box, please refer to the [remote driver installation sheet](#) for more information.




SINGLE FIXTURE

1 INSTALL MOUNTING BRACKETS.


CAUTION: Make sure the electrical power is turned off.

Locate the T-Bar [A] support and gently drop the mounting brackets [B] on it.

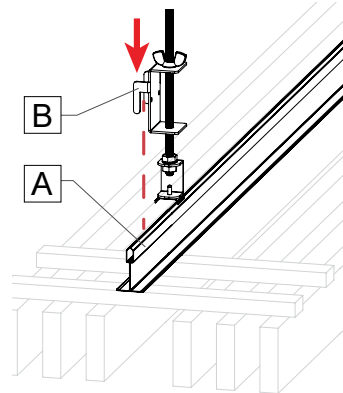


2 LOCATE THE MOUNTING BRACKETS.

Position the mounting brackets [B] on the T-bar [A], in the appropriate locations.

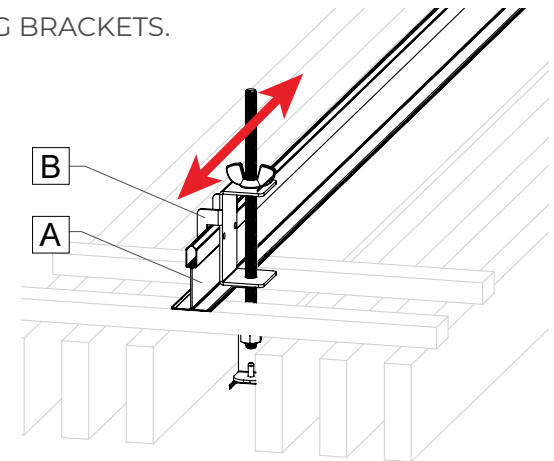



3 SECURE THE MOUNTING BRACKETS.

Secure the mounting brackets [B] by tightening screws [C] on the brackets.

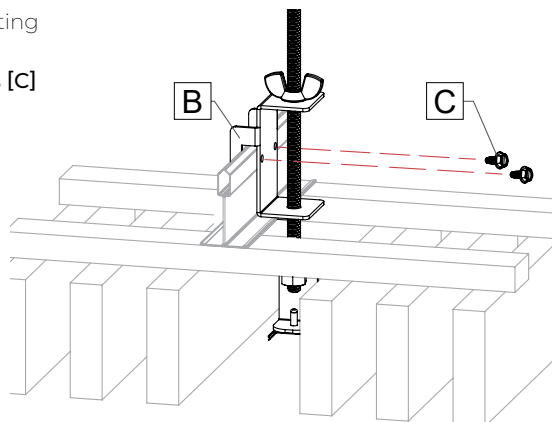

4 INSTALL THE FIXTURE.

Clip the fixture [D] to the mounting brackets [B].

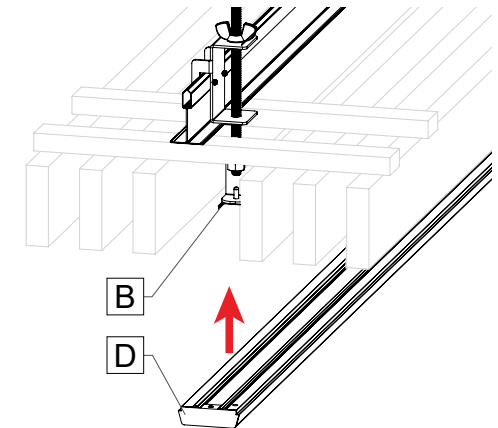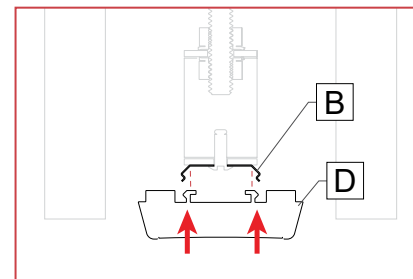


SHALO ULTRA 1.5

Surface - Wood slat



5 ADJUST THE FIXTURE.

Adjust the fixture's [D] height by turning the butterfly nut [E].

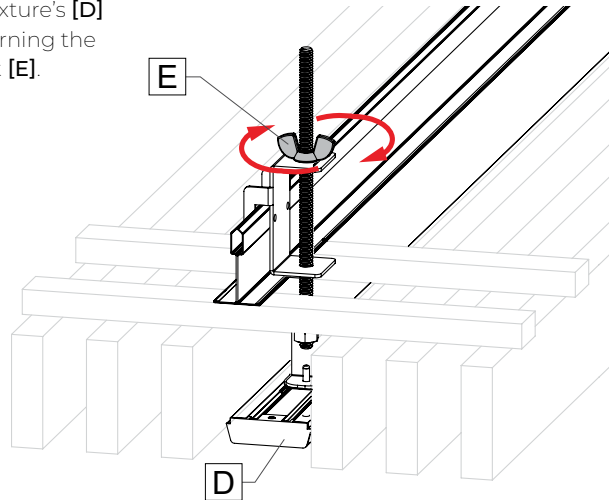

6 MAKE ELECTRICAL CONNECTIONS.


Connect the main AC power cable to the remote driver box.

Then, connect the remote driver box DC cable [F] to the fixture using the provided wire harness [G].

NOTE: A jumper cable (by others) might be necessary between the remote driver box and the fixture.



For remote driver box, please refer to the [remote driver installation sheet](#) for more information.

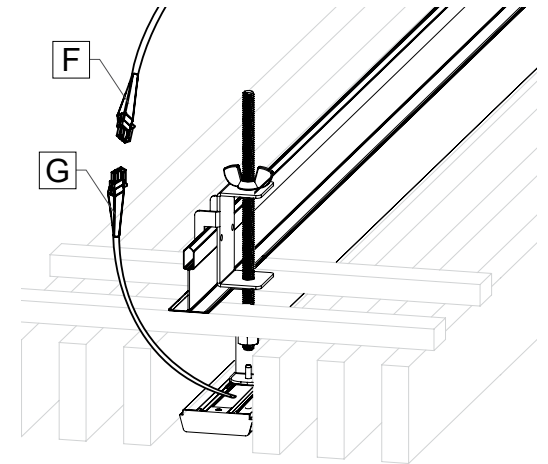


CONTINUOUS RUN

1 FOR A CONTINUOUS RUN, FOLLOW STEPS **1** TO **6** FROM THE SINGLE UNIT SECTION FOR THE FIRST FIXTURE, THEN:

2 FOLLOW STEPS **1** TO **3** FROM THE SINGLE UNIT SECTION FOR ALL THE FIXTURES IN THE RUN, THEN:


3 JOIN THE FIXTURES.

Insert the joiner [H] from one fixture to the second one, pull the fixtures together.

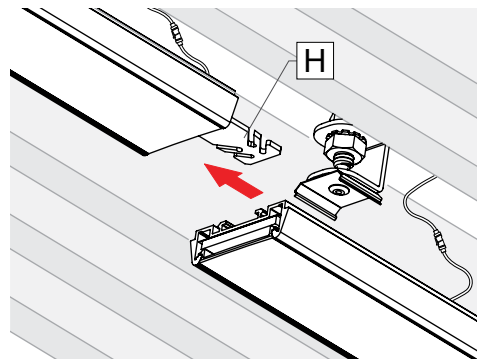

4 FIX THE FIXTURES TO THE CEILING.

Clip the fixture [D] to the mounting brackets [B].

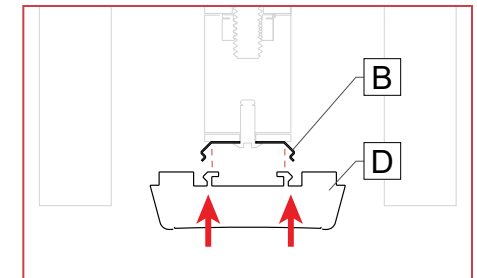

5 REPEAT STEPS **3** TO **4** FOR ALL FIXTURES IN THE RUN.