


**IMPORTANT:** Installation inst. are shown with Shalo 3 S and apply to the Shalo 3 V and T as well


**NOTE:** Wire dimming conductors as Class 1

1

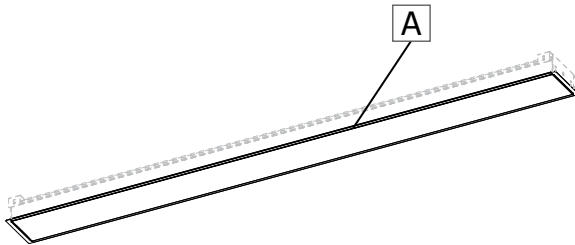


Make sure the power to the fixture (A) is turned off.

2

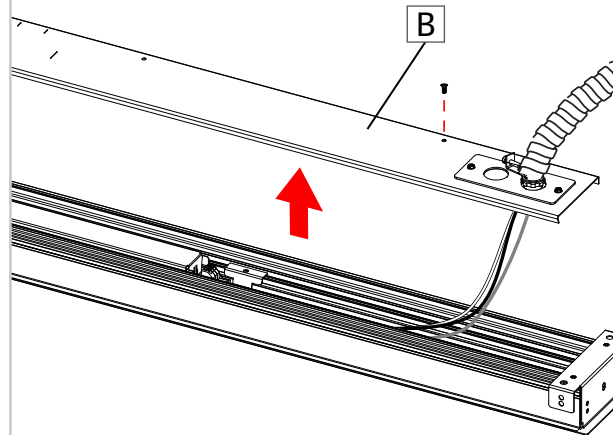


Remove the top cover (B).

3

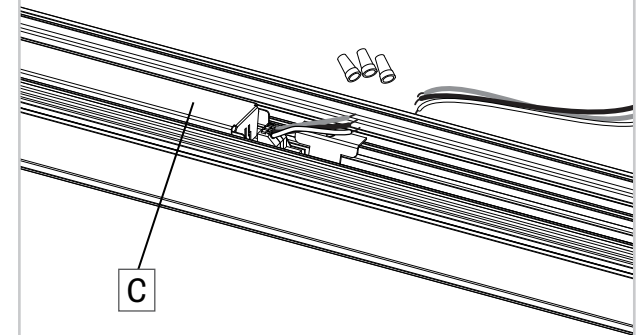


Disconnect wires from the driver (C).

4

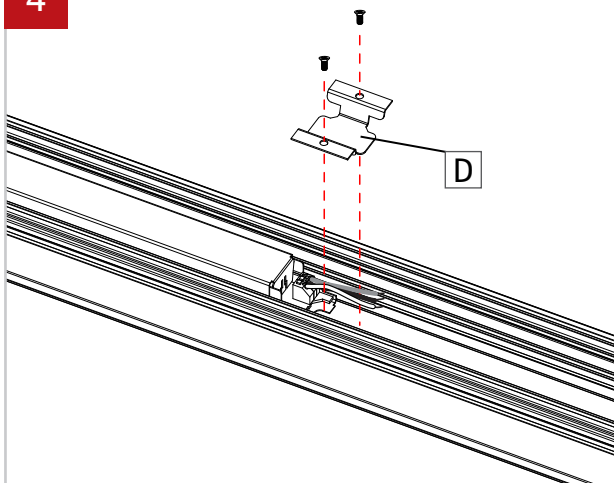


Unscrew and remove the driver brackets (D).

5

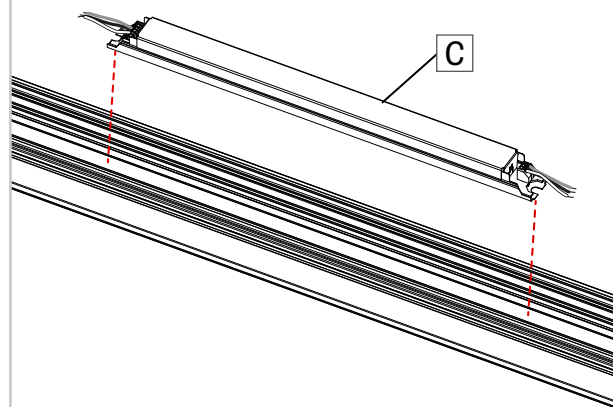

Remove the driver (C) from the fixture. Replace the driver.

6

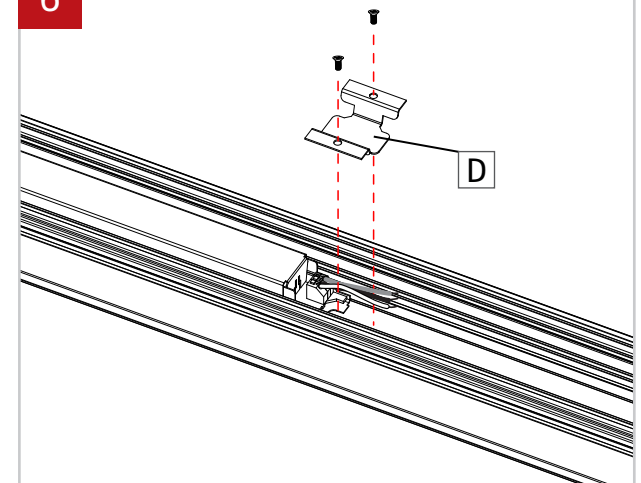

Reinstall the driver brackets (D).

