

SHELL

SQUARE - RECESSED

STATIC WHITE, BIOS, SOLA, DUO

LUMENWERX

Project: _____


Type: _____

DESCRIPTION


Shell fixtures are sleek, balanced, and well detailed. Remarkably versatile, Shell complements general illumination in working spaces and provides functional illumination over conference tables, in break or lunch rooms, and in circulation spaces. Shell Square Recessed can install fully flush or semi-recessed, with an adjustable lens position up to 1 inch. Shell is available with Chromawerx Duo, Sola, and solid colors (red, green and blue), as well as Static White and BIOS. See additional specification sheets for other mounting and shape options.



Up to 125 lm/W performance

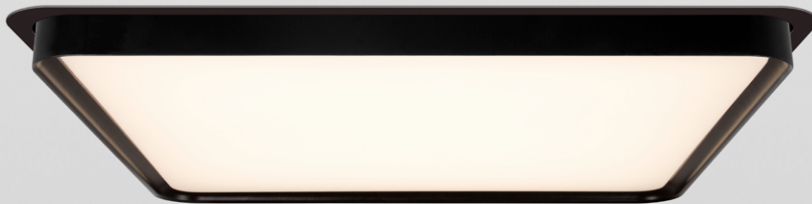

Shell Square Recessed 16" X 16" - With 1" projection

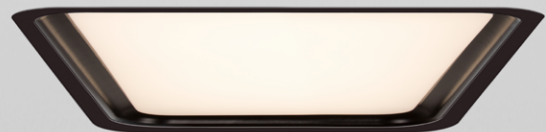

Shell Square Recessed 12" X 12" - Flush



Shell Square Recessed 8" X 8"
With 0.5" projection

SHELL

SQUARE - RECESSED

STATIC WHITE, BIOS, SOLA, DUO

LUMENWERX

Project: _____

Type: _____

Order Guide

LUMINAIRE ID	SIZE	OPTICS	LIGHT SOURCE	CRI	LUMEN PACKAGE			
		HLO						
SHESQRFH - Shell Square Recessed Flush SHESQRADJ - Shell Square Semi-Recessed with adjustable projection	8INX8IN - 8" X 8" 12INX12IN - 12" X 12" 16INX16IN - 16" X 16"	HLO - High-Efficiency Lambertian Optic	SW - Static white BIOSST - Static biologically-optimized lighting BIOSDY - Dynamic biologically-optimized lighting SOLA - Dim-to-warm single channel control 22K to 35K DUO - Tunable white 2-channel control 27K to 65K RS - Red solid GS - Green solid BS - Blue solid	80 - 80CRI 90 ¹ - 90CRI	<u>SW, BIOS, BIOSDY, SOLA, DUO</u>			
					8" X 8"	Low 450lm	Medium ² 700lm	High ² 900lm
					12" X 12"	1000lm	1500lm	2000lm
					16" X 16"	1800lm	2700lm	3600lm
					<u>Solid Colors (RS, GS, BS)</u>			
					8" X 8"	8W		
					12" X 12"	18W		
					16" X 16"	32W		
					² Not available with BIOS.			

COLOR TEMP Do not specify for Sola, Duo and solid colors.	VOLTAGE	DRIVER ⁵	DRIVER BOX	ELECTRICAL
			RDB	1
27³ - 2700K 30 - 3000K 35 - 3500K 40 - 4000K	120 - 120V 277 - 277V UNV - 120V-277V 347⁴ - 347V	<u>SW, BIOS</u> D1 - 1% 0-10V DA⁶ - DALI LDE1⁶ - Lutron Hi-lume 1% Eco ELD1 - eldoLED 1% ECOdrive ELDO - eldoLED 0.1% SOLOdrive <u>SOLA</u> SD1 - Single 0-10V input	<u>DUO</u> DD1 - Dual 0-10V input for CCT/intensity DMX⁶ - DMX, to specify see pages 8 to 11 DA⁶ - DALI PSQO⁶ - Lutron T-Series 1% Tunable White <u>Solid Colors</u> D1 - 0-10V	RDB - Remote Driver Box 1 - 1 circuit

MOUNTING	FINISH
DTR	
DTR - Drywall trim	W - Matte white AL - Aluminum B - Matte black RAL1028 - Yellow RAL2004 - Orange RAL3020 - Red RAL4010 - Magenta RAL5002 - Blue RAL6018 - Green CF# - Custom finish specify RAL#

Accessories

Optional, order separately

DMX WALL CONTROLLER ⁷
WCW - Wall controller white WBW - Wall controller black

⁷ For more information, see pages 8 to 11, or consult factory.

SHELL

SQUARE - RECESSED


STATIC WHITE, BIOS, SOLA, DUO

LUMENWERX

Project: _____


Type: _____

Section view

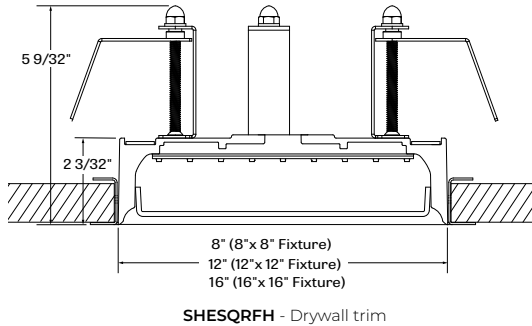


Lens positioning options


FULLY RECESSED



SEMI-RECESSED adjusted to 0.5" projection



SEMI-RECESSED adjusted to 1" projection



Shell Recessed can be installed flush or semi-recessed with adjustable projection up to 1.0". A 0.5" wide trim flange covers the ceiling cut-out. Adjustable swing-out mounting brackets secure the luminaire to the ceiling.

SHELL

SQUARE - RECESSED


STATIC WHITE, BIOS, SOLA, DUO

LUMENWERX

Project: _____


Type: _____

Photometrics




Performance for 8" X 8" - Delivered Lumens at 35K at 80 CRI

LED OUTPUT	DELIVERED LUMENS	INPUT WATTAGE	EFFICACY LPW
Low output	450	4.5	99
Medium output	700	7.2	97
High output	900	9.5	95



Performance for 12" X 12" - Delivered Lumens at 35K at 80 CRI

LED OUTPUT	DELIVERED LUMENS	INPUT WATTAGE	EFFICACY LPW
Low output	1000	8.0	125
Medium output	1500	12.3	122
High output	2000	16.7	120



Performance for 16" X 16" - Delivered Lumens at 35K at 80 CRI

LED OUTPUT	DELIVERED LUMENS	INPUT WATTAGE	EFFICACY LPW
Low output	1800	15.5	116
Medium output	2700	23.7	114
High output	3600	32.3	111

Multiplier - CCT/CRI

CCT (K)	WATTS		LPW	
	CRI80	CRI90	CRI80	CRI90
2700	1.05	1.13	0.95	0.88
3000	1.01	1.09	0.99	0.92
3500	1	1.08	1	0.93
4000	1	1.08	1	0.93

SHELL

SQUARE - RECESSED

STATIC WHITE, BIOS, SOLA, DUO

LUMENWERX

Project: _____

Type: _____

Technical Specifications

OPTICS

High-Efficiency Lambertian Optic (HLO) - Shielding of 0.1" thick, thermoformed diffusing acrylic with up to 70% transmission and excellent source obscuration. Vertical return edge illuminates inside of housing. Luminaire brightness is controlled by the flux-to-shielding area ratio.

LIGHT SOURCE - STATIC WHITE

Custom array of mid-power LEDs mounted directly to the fixture housing for optimal thermal performance. Available in 2700K, 3000K, 3500K and 4000K with a minimum 80 CRI and an option for 90 CRI with elevated R9 value. Color consistency is maintained to within 3 SDCM. LEDs operate at a reduced drive current to optimize efficacy and lumen maintenance. All LEDs have been tested in accordance with IESNA LM-80-08 and results have shown L80 lumen maintenance is greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.


LIGHT SOURCE - SOLA / DUO

Custom linear array of alternating color temperature mid-flux LEDs are mounted directly to the housing for optimal thermal performance. For the Duo products, a color temperature range from 2700K-6500K is achievable with color points on or below the black body curve. For the Sola products, a color temperature range from 2200K-3500K is controlled synchronously with intensity. Color consistency between fixtures is maintained to within 3 SDCM. LEDs are operated at reduced drive current to optimize efficacy and lumen maintenance. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.



BIOS SkyBlue™ Technology is designed to provide the specific circadian stimulus to improve overall sleep quality, recovery during the night, and overall feelings of well-being.

The non-visual light signals that stimulate our circadian system have peak intensity in the "sky blue" region. As the diagram below illustrates, BIOS SkyBlue technology shifts the peak LED spectral intensity (460 nm) to align better with the peak response of circadian stimulus. Also note the enhanced deep-red (near 660 nm) spectrum.



WELL for Light - The WELL building standard focuses on light quality in several features. There are three categories that are fully attributed to the construction and features of a luminaire. In WELL V1, it's Feature 54 Circadian Lighting, Feature 55 Glare Control, and Feature 58 Color Quality. In WELL V2, it's Feature L03 Circadian Lighting, Feature L04 Glare Control, and Feature L07 Electric Light Quality.

This fixture meets Features:

- Feature 54 or L03 when BIOS LED or Duo is selected
- Feature 55 or L04 meets WELL glare category (b-c-d)
- Feature 58 or L07 when 90CRI is selected

All LED drivers used at Lumenwerx are deemed to have a low risk level of flicker, of 5 % or less below 90Hz operational as defined by IEEE standard 1789-2015 LED.



WELL for Mind - This luminaire meets WELL for mind as it is a human centric luminaire offering quality light, excellent color, and smooth optics. If any of these features are incorporated in a luminaire, it can improve the ability to focus, concentrate, and persist longer on a given task. This fixture harmoniously operates in a space to assist the mind.

For more information please contact well@lumenwerx.com.

SHELL

SQUARE - RECESSED

STATIC WHITE, BIOS, SOLA, DUO

LUMENWERX

Project: _____

Type: _____

CHROMAWERX


A custom array of alternating color temperature LEDs mounts directly to the housing for optimal thermal performance. Mid-flux LEDs operate at reduced drive current to optimize efficacy and lumen maintenance.

Chromawerx Sola

Chromawerx Sola dims output while warming the color temperature in a pre-determined relationship. Dimming range is programmable, but the default option runs from 3500K at 100% full power to 2200K at 5% full power.

Chromawerx Duo

Chromawerx Duo enables the user to set color temperature and light output independently. Commonly called "tunable white", Chromawerx Duo provides the range from warm to cool color that can be useful for helping to entrain circadian rhythms, stimulate alertness, and compensate for jet lag, among other applications. The Chromawerx drivers are programmed to limit maximum light output and power usage across all color temperatures.

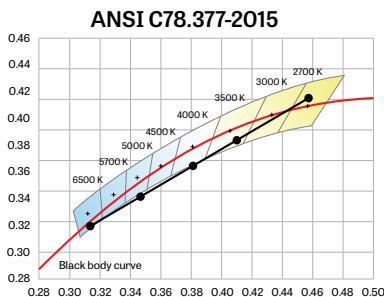

Chromawerx Solid colors

For dramatic coloration, Shell offers Chromawerx options for solid colors like red, green, or blue. Consult Lumenwerx for implementations of Chromawerx Duo with white and solid color LEDs, enabling muted colors or the ability to switch between white and colored light



RS - Red solid


BS - Blue solid

GS - Green solid

ELECTRICAL

Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency > 84%, PF > 0.9, THD < 20%. Other specifiable options include Lutron Hi-Lume 1%, DMX (RDM compatible), eldoLED 1% Ecodrive, eldoLED 0.1% SOLOdrive, and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant.

REMOTE DRIVER BOX (RDB)



Driver is recessed with brackets for mounting to ceiling joists or other supporting members.

PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire, or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, Duo (tunable white), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

SHELL

SQUARE - RECESSED

STATIC WHITE, BIOS, SOLA, DUO

FINISH

Interior - 95% reflective, matte white powder coating.

Exterior - powder coating in a range of vibrant colors.

HOUSING COLOR OPTIONS



W - Matte white



AL - Aluminum



B - Matte black



RAL1028 - Yellow



RAL2004 - Orange



RAL3020 - Red



RAL4010 - Magenta



RAL5002 - Blue



RAL6018 - Green

CONSTRUCTION

Housing - Die-cast aluminum ring with light-weight die-cast backplate

Mounting brackets - Bended steel sheet metal

Diffuser - High-Efficiency Lambertian Optic, thermoformed acrylic

WEIGHT

SHESQR 8" X 8" - 3.25 lbs

SHESQR 12" X 12" - 5.75 lbs

SHESQR 16" X 16" - 9.5 lbs

LUMENWERX

Project: _____

Type: _____

CERTIFICATIONS

ETL - Rated for Indoor Dry/Damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

WARRANTY

Lumenwerx provides a five-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.

DUO DMX SPECIFICATION

A qualified DMX integrator is required to assure proper installation and commissioning of the DMX network. **When placing the PO, please provide the contact information of your DMX integrator.**

Please answer the following questions to help us identify your DMX network requirements.

YES

Do you require a wall controller provided by Lumenwerx?

NO

DMX controller supplied by Lumenwerx

DMX control system supplied by others. Lumenwerx will supply DMX-enabled fixtures with default DMX addressing. See following pages for technical DMX informations. ✓

How many zones do you have?

A zone consists of one or more luminaires behaving identically.

**1 Zone****2 Zones****How to calculate the required number of drivers:**

Per fixture

1x
Driver / 50W
per side

To Calculate
of drivers

1 - 4 Zones**5 or more Zones**

Do you have more than
32 drivers in total?

NO**YES**

Order a standard Lumenwerx wall controller.

WALL CONTROLLER


WCW - wall controller white
WCB - wall controller black

Add the control code at the end of your order code.
Please provide a fixture layout or RCP (Reflected Ceiling Plan) showing the locations of the DMX fixtures, zones and the DMX wall controller.
Refer to your DMX integrator for the installation. ✓

Subject to factory evaluation. Please contact our controls specialist at controls@lumenwerx.com. Additional costs and equipment will be required. ✓

Subject to factory evaluation and approval. Please contact our controls specialist at controls@lumenwerx.com. Additional costs and equipment will be required. ✓

GENERIC DMX NETWORK ARCHITECTURE

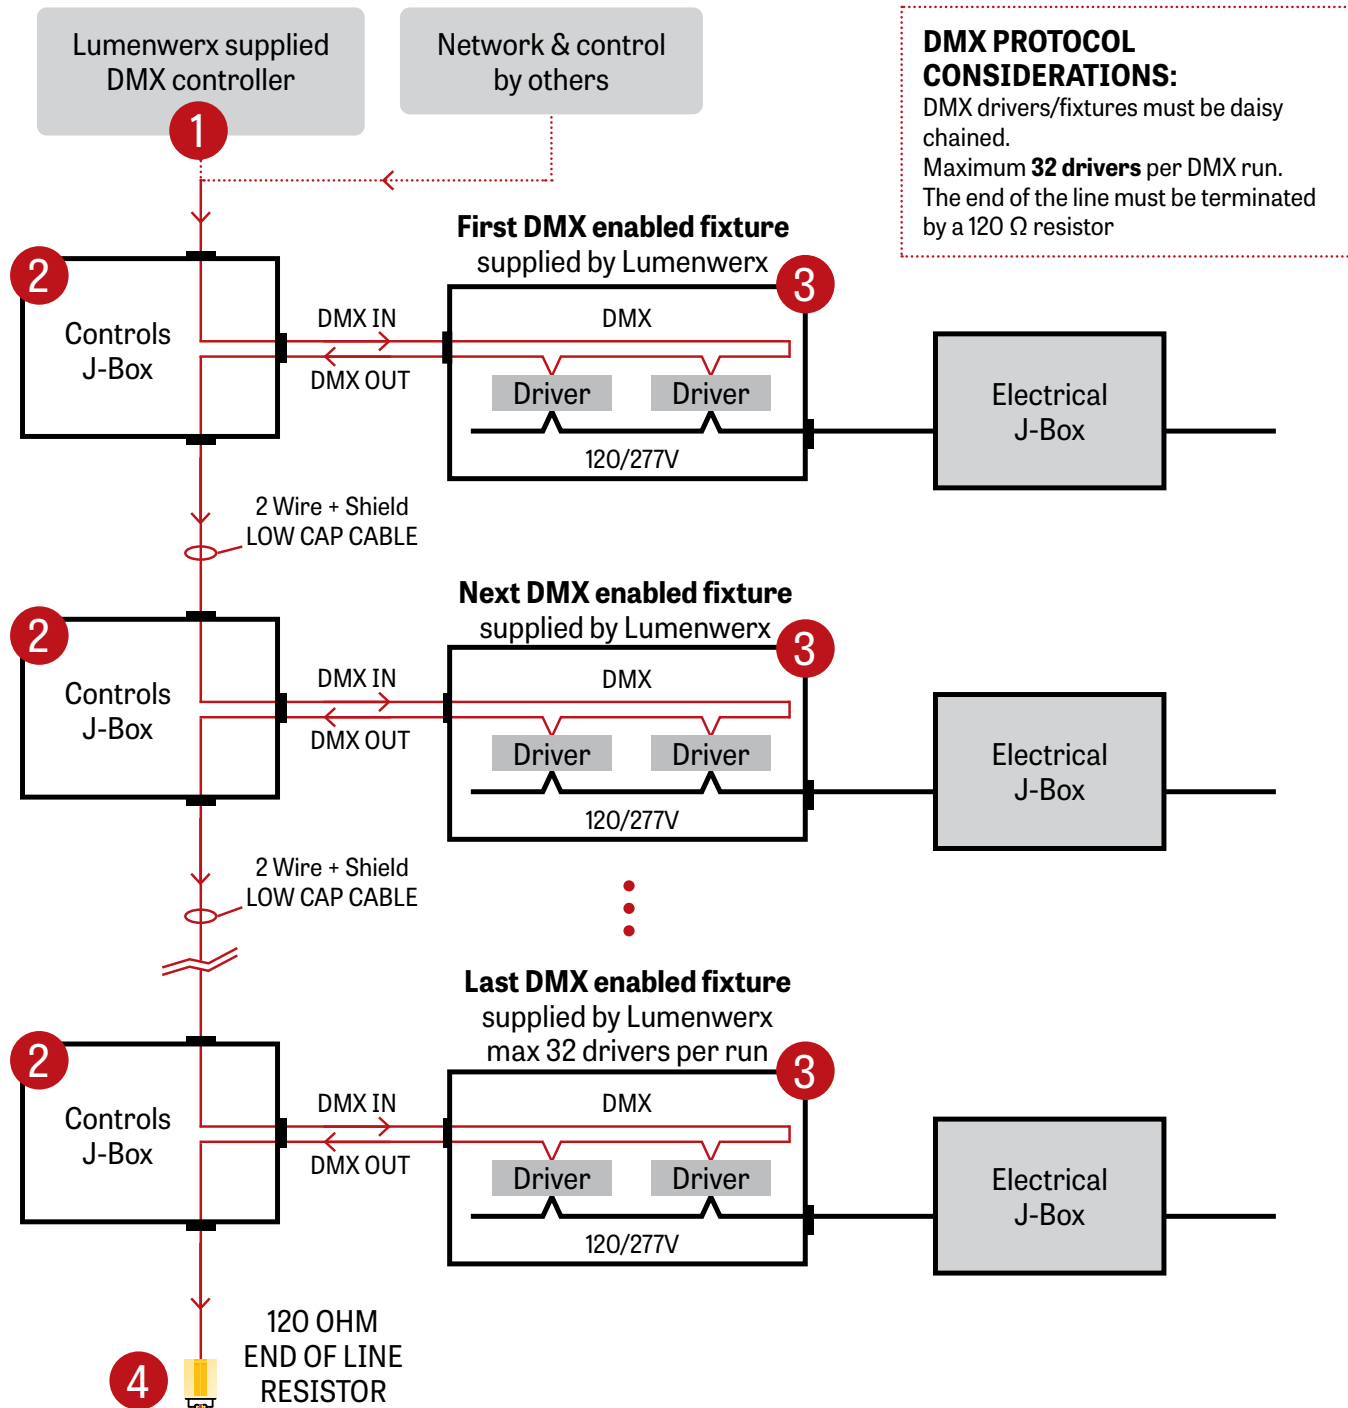

SHELL

SQUARE - RECESSED

STATIC WHITE, BIOS, SOLA, DUO

LUMENWERX

Project: _____

Type: _____


DMX WALL CONTROLLER - TUNABLE WHITE

Default DMX Addresses:

1. WARM

2. COOL

DUO 1-4 ZONE

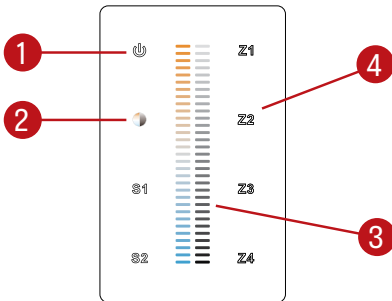

(1) Power:

Use this button to turn ON or OFF the fixture.

(2) Brightness/CCT:

Use the color/brightness toggle button to chose between color/brightness. When blue: brightness is selected; when yellow: color is selected.

(3) Slider:

Depending on the mode chosen in 2, the slider will allow the user to set desired color or brightness.

(4) Zone select:


Up to 4 zones can be selected, either independently or together. Once selected, the commands will be sent to the zone identified by a Blue LED.

1 LUMENWERX SUPPLIED DMX CONTROLLER

To the first fixture

WALL BOX SUPPLIED BY OTHERS

Back Panel

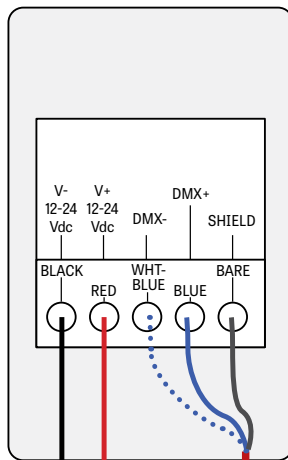

2 Wire +
Shield Low Cap Cable

I.E.: Cerco Cable 7539-10
Belden 9841
Belden 8241

DC out

Power Supply
120-240V AC / 24VDC

N
L

BLUE
BROWN


Neutral

Line

Ground

Electrical J-Box


TW Front Panel

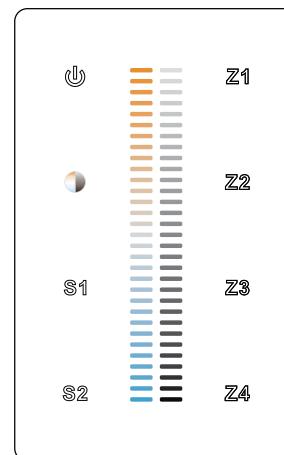

Controller image may differ

2 J-BOX DMX DAISY CHAIN DETAIL

Low capacitance DMX Cable from previous fixture

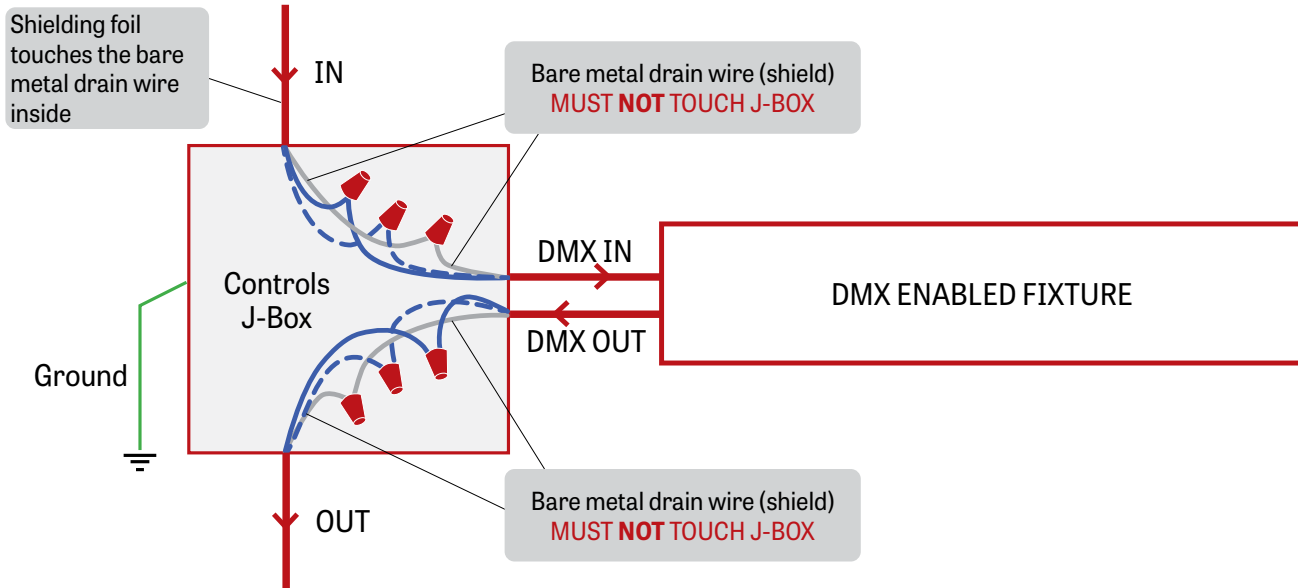

Low capacitance DMX cable to next fixture

3 DMX CONNECTION RECESSED & SURFACE

