


SHELL

Square - Surface - Remote Driver

LUMENWERX

 This product must be installed in accordance with the National Electrical Code and all applicable local codes, by a person familiar with the construction and operation of the product, and the hazards involved. Proper grounding is required for safety.

Ce produit doit être installé suivant le code national de l'électricité, ainsi que tous les codes locaux applicables, par une personne familière avec la construction et le fonctionnement du produit, ainsi que tous les risques qui y sont associés. La mise à terre électrique est obligatoire pour la sécurité.



Wire dimming conductors as Class 1.




Do not handle fixture by the wires.



Shown with Shell 8" x 8". Applicable for all sizes.


1 INSTALL REMOTE DRIVER BOX.

Please refer to the remote driver box installation sheet for more information.

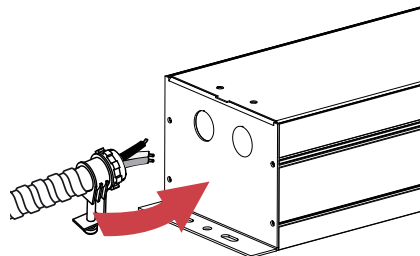


2 PREPARE THE CEILING.

Prepare the area where the fixture is going to be installed. Cut the hole in the drywall ceiling as indicated.

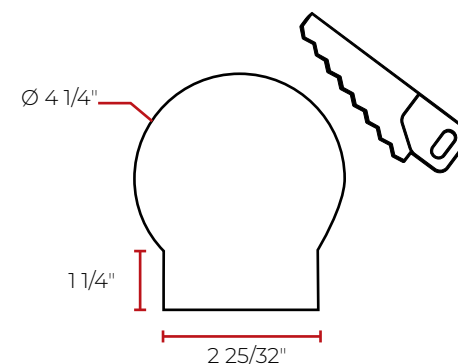

3 LOCATE SCREW HOLES.


Use the fixture [A] as a guide to mark 4 drill holes [B] on the ceiling.

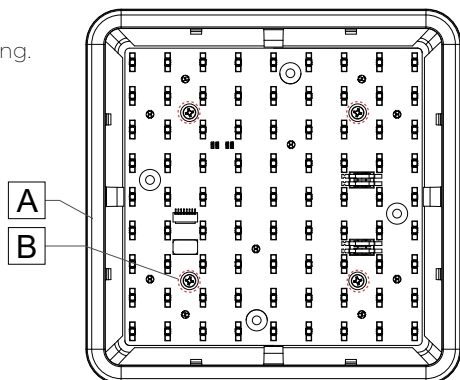

4 INSTALL ANCHORS.

Remove the fixture. Drill the holes [B] and install the screw anchors [C].

NOTE: It is recommended to have wooden reinforcements.

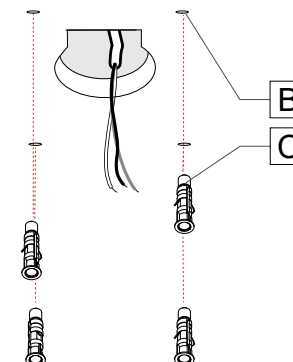


SHELL

Square - Surface - Remote Driver

5 REMOVE THE J-BOX COVER.

Remove the cover [D] from the J-box [E].



NOTE: Do not let the fixture hang by the wires.

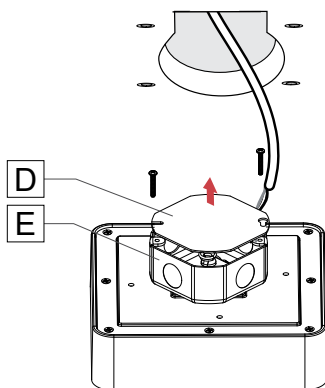

7 INSTALL THE FIXTURE.

Use the screws [I] to fasten the fixture [A] to the ceiling.


Note: Fixtures with the up light glow option have spacers to offset the fixture from the ceiling.

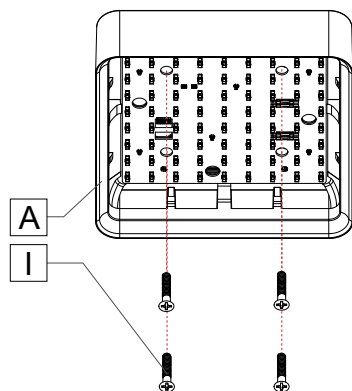

6 MAKE ELECTRICAL CONNECTION.

Make low voltage electrical connection between the fixture wires [F] and remote driver wires [C] inside the J-box [E] using wire nuts [H]. Rescrew the J-box cover [D].

Warning: Power must come from single branch circuit.

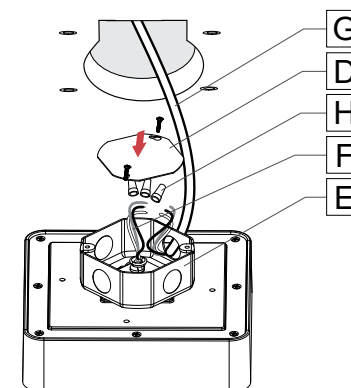

8 INSTALL THE LENS.

Align the snapping features [J] between the fixture [A] and the lens [K]. Put the lens [K] in place.

