



**NOTE:** Wire dimming conductors as Class 1


### 1 SINGLE FIXTURE

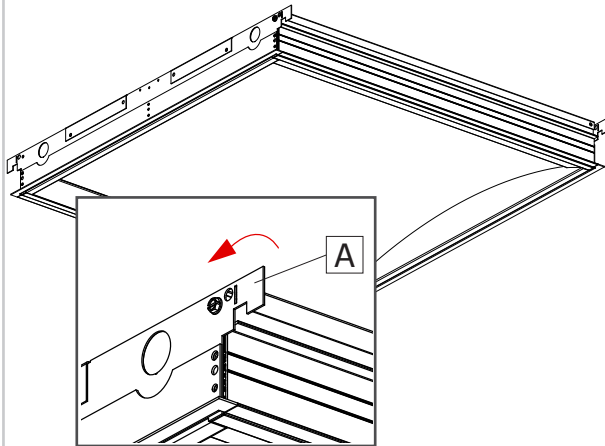


Make sure the power to the fixture is turned off. Bend the tabs (A) on each corner of the fixture.

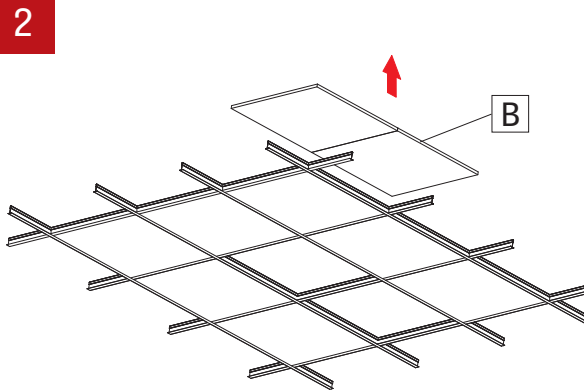


Remove ceiling tiles (B) where the fixture will be installed and the adjacent tiles for easy access during installation.

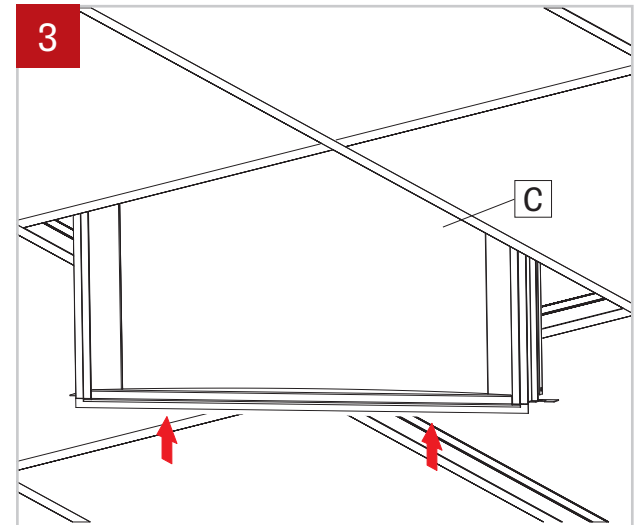


Insert the fixture (C) above the ceiling grid as shown.

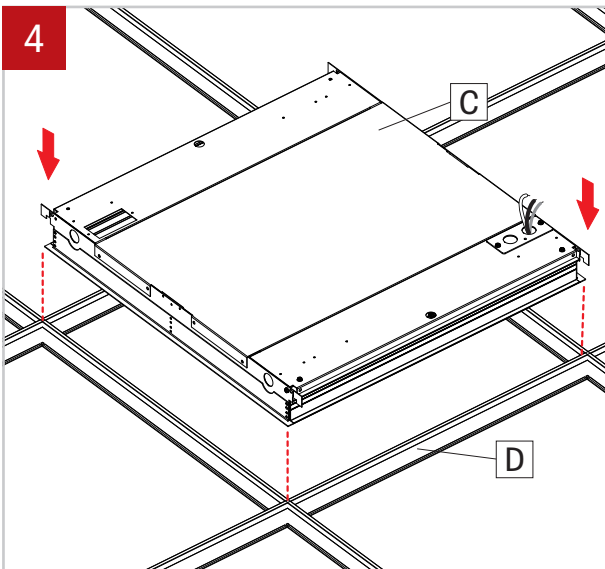

Insert fixture (C) into the t-bar grid (D).

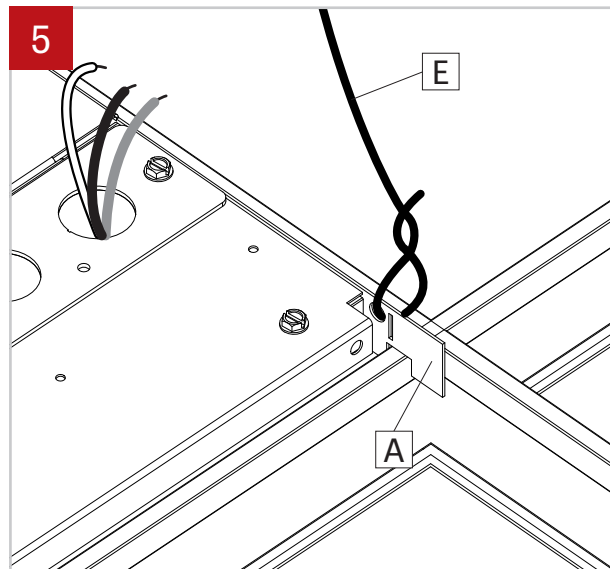

Safety wires (E) should be attached to the tabs (A).

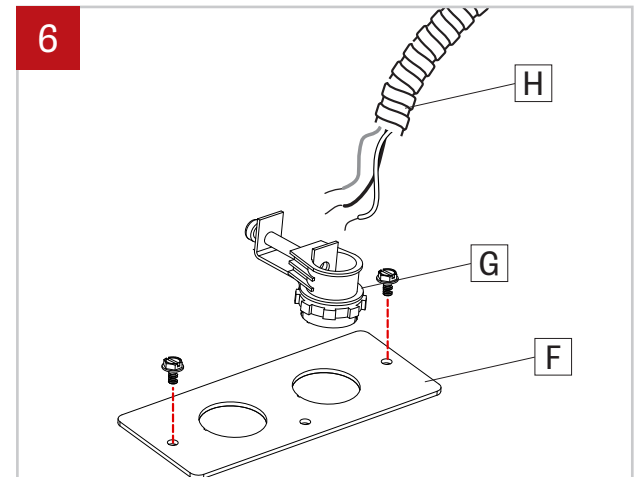

Remove power plate (F) from fixture and install BX connector (G) (by other) and BX cable (H) (by other) through the power plate. Tighten BX connector (G) screw.

