


SLIGHT PENDANT

PATTERN

DIRECT, DIRECT/INDIRECT

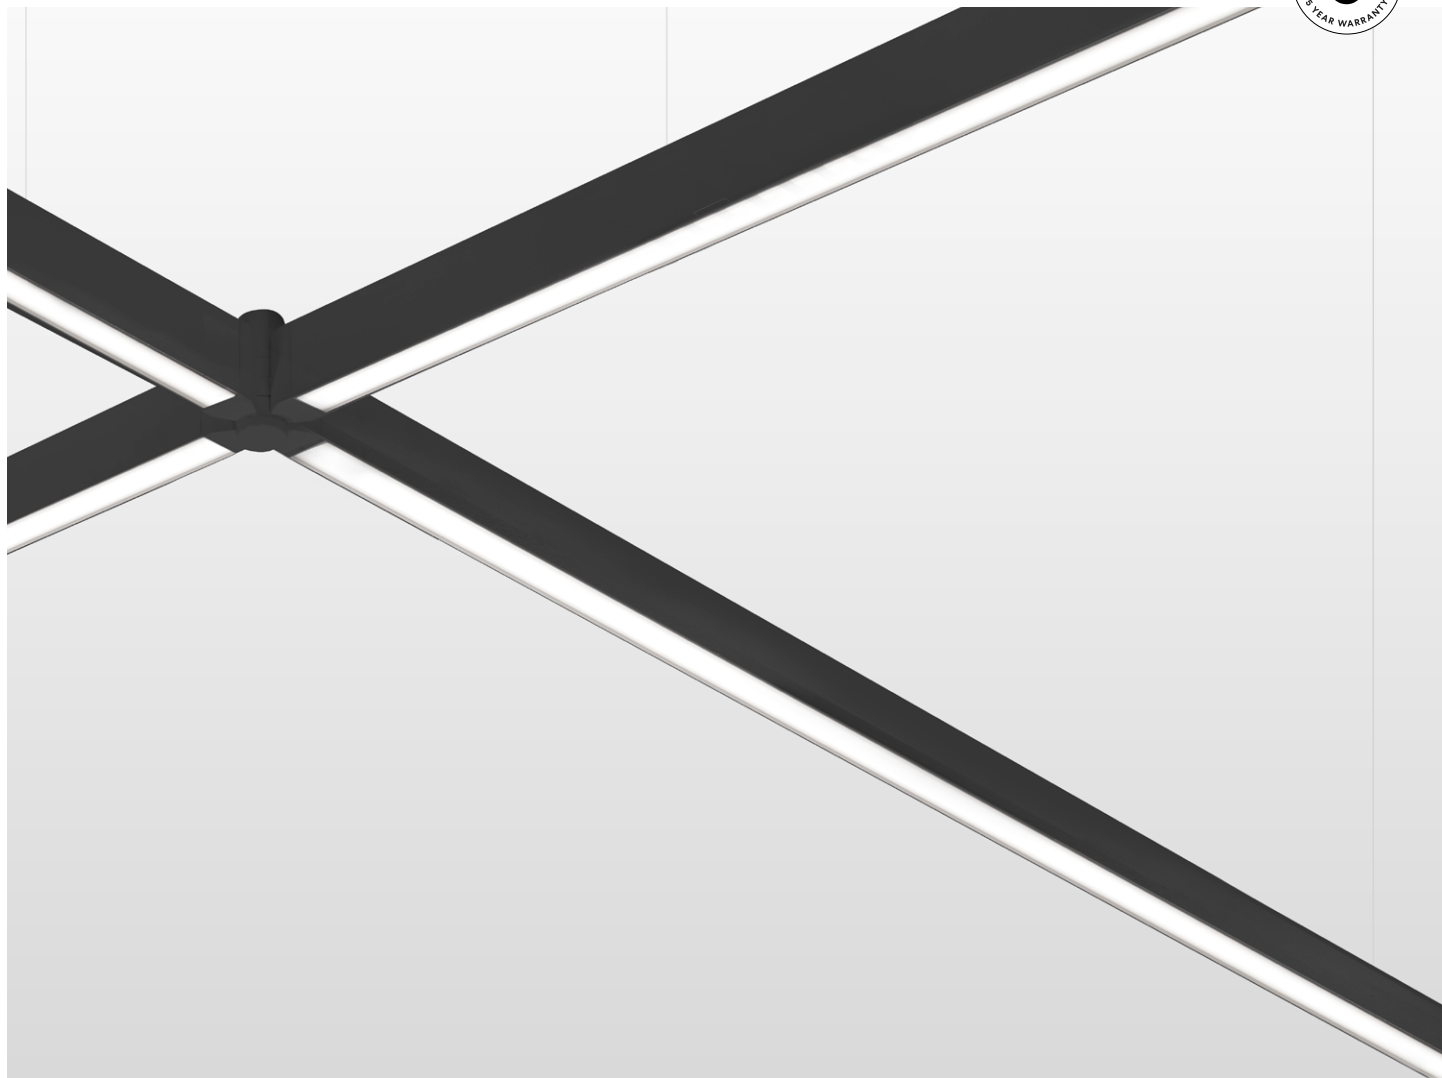

The Slight collection comprises miniature linear luminaires equipped with a remote driver. Slight fixtures deliver precise, glare-controlled illumination, ensuring exceptional visual comfort. They are suitable for drywall, grid, and wood slat ceiling applications.

SENSORS

For latest information on sensors, click [here](#).



SLIGHT PENDANT

PATTERN

DIRECT, DIRECT/INDIRECT



Project: _____

Type: _____

Order Guide

LUMINAIRE ID	DISTRIBUTION	DIRECT OPTIC	INDIRECT OPTIC Specify NA for Direct fixture
SLIPPAT			
SLIPPAT - Slight Pendant Pattern	D - Direct DI - Direct/Indirect	HLO - High-Efficiency Lambertian Optic BDPO - Matte Black Diamond Prism Optic GDPO - Graphite Diamond Prism Optic MPO - Micro-Prism Optic	MWIO2 - Mini Widespread Indirect Optic MWAI2 - Mini Widespread Asymmetric Indirect Optic NA - Not applicable

LIGHT SOURCE	CRI	DIRECT LUMEN PACKAGE	INDIRECT LUMEN PACKAGE Specify NA for Direct fixture	COLOR TEMPERATURE
SW - Static white FS - Full spectrum	80CRI ¹ - 80 CRI 90CRI ¹ - 90 CRI 95CRI ² - 95 CRI ¹ Not available with full spectrum. ² Available with full spectrum only.	200LMF - 200 lm/ft 350LMF - 350 lm/ft 500LMF - 500 lm/ft 600LMF ³ - 600 lm/ft ³ Not available with Direct/Indirect.	200LMF - 200 lm/ft 350LMF - 350 lm/ft 500LMF - 500 lm/ft NA - Not applicable	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K

LUMINAIRE LENGTH	CORNER TYPE ⁵	VOLTAGE	DRIVER ⁷	ELECTRICAL
#FT#IN ⁴ - Specify the total nominal length (#) in 1' and/or 1" increments Standard nominal lengths: Single units: 2' to 8' Continuous runs: lengths over 8' ⁴ See page 3 for actual dimensions.	#LNH2 - 2-way horizontal Linx #LNH3 - 3-way horizontal Linx #LNH4 - 4-way horizontal Linx ⁵ Specify quantity (#) for each required Linx. Separate codes with a "+" if more than one is specified.	120V - 120V 277V - 277V UNV - 120V-277V 347V ⁶ - 347V ⁶ Available with RD1 driver only.	REMOTE RD1 - 1% 0-10V RDA ⁸ - DALI RLDE1 ⁸ - Lutron Hi-lume 1% Eco RELD1 - eldoLED 1% ECOdrive 0-10V RELD0 - eldoLED 0.1% SOLOdrive 0-10V ⁷ PoE (Power-over-Ethernet) compatible. Consult factory for details. ⁸ On-site commissioning is required.	1C - 1 circuit 2C ⁹ - 2 circuits ⁹ Available for Direct/Indirect only. Separate direct and indirect circuits.

MOUNTING ¹⁰				FINISH
CANOPY TYPE 2CN ¹¹ - Ø 2" canopy 5CN ¹² - Ø 5" canopy ¹⁰ See page 3 for details. ¹¹ Mounted to low voltage (LV) j-boxes provided by Lumenwerx. Ø 2" for all canopies. ¹² Mounted to standard j-boxes by others. Ø 5" for power canopies, Ø 2" for non-power canopies.	CANOPY FINISH FTMB - Textured matte black FTMW - Textured matte white CF# - Custom finish, specify RAL#	POWER CPS - Coaxial powered suspension	MOUNTING CABLE LENGTH 36IN - 36" 72IN - 72" ##IN - Specify nominal length in inches	FTMB - Textured matte black FTMW - Textured matte white CF# - Custom finish, specify RAL#


SLIGHT PENDANT




PATTERN
DIRECT, DIRECT/INDIRECT

Dimensions

DIRECT



DIRECT/INDIRECT



Actual lengths based on optics


NOMINAL LENGTH	HLO/MPO	BDPO/GDPO
2'	23.7"	26.7"
4'	47.3"	46.7"
5'	58.9"	60"
6'	70.9"	73.3"
8'	94.5"	93.2"

For other lengths or long runs, please consult factory shop drawings.
End cap thickness 1/8" not included in above dimensions.


Mounting

2CN - Ø 2" canopy

DIRECT

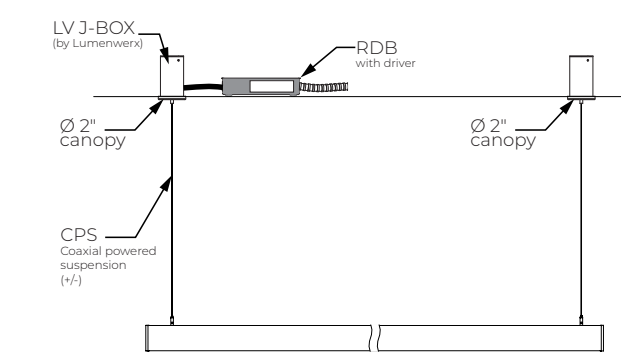


DIRECT/INDIRECT

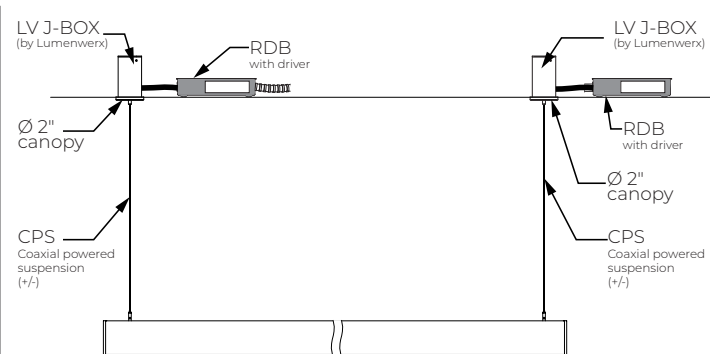


5CN - Ø 5" canopy

DIRECT

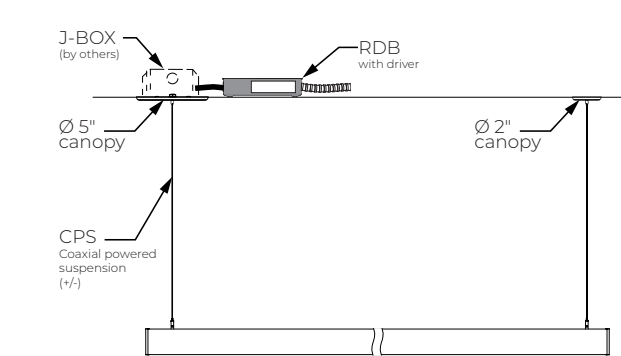

DIRECT/INDIRECT

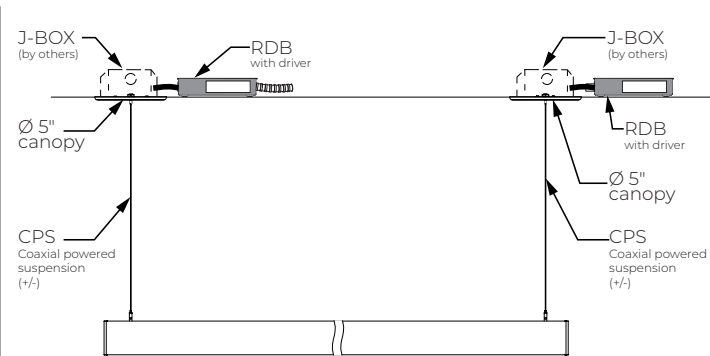


SLIGHT PENDANT




PATTERN
DIRECT, DIRECT/INDIRECT

LINX

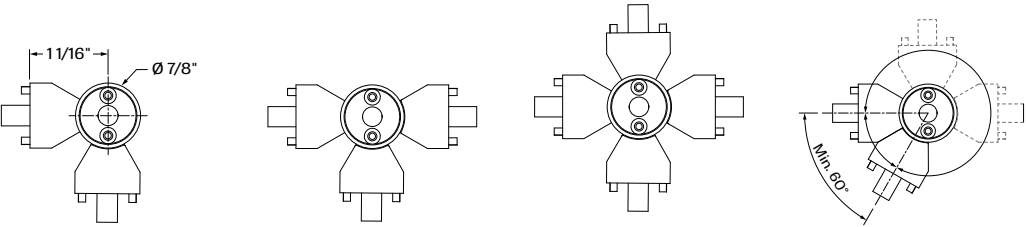

LNH2 - 2-way horizontal Linx **LNH3** - 3-way horizontal Linx **LNH4** - 4-way horizontal Linx

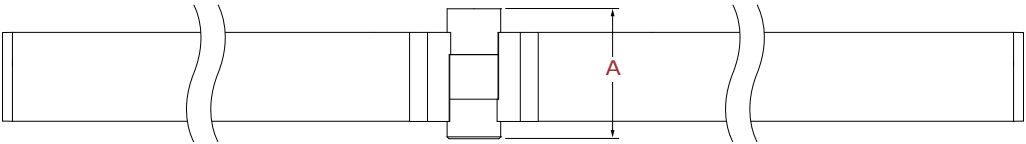

SLIPPAT - Slight Pendant Pattern - shown with 2-way horizontal Linx

A LINX HEIGHT	
DIRECT/INDIRECT	2 5/8"
DIRECT	2 1/8"

SLIGHT PENDANT



PATTERN

DIRECT, DIRECT/INDIRECT


Photometrics

BDPO/GDPO values calculated based on four 6.7" sections at 3500K and 90 CRI.

HLO/MPO/MWIO2/MWAI2 values calculated based on a 4' fixture at 3500K and 90 CRI.


DIRECT OPTICS

HLO




LM/FT	W/FT	LM/W
200	3.9	51
350	5.6	63
500	8.1	62
600	10	60

BDPO




LM/FT	W/FT	LM/W
200	3.8	53
350	5.4	65
500	7.8	64
600	9.6	63

GDPO



LM/FT	W/FT	LM/W
200	3.3	61
350	4.7	75
500	6.8	74
600	8.3	72


MPO



LM/FT	W/FT	LM/W
200	3.9	51
350	5.6	63
500	8.1	62
600	10	60


INDIRECT OPTICS

MWIO2



LM/FT	W/FT	LM/W
200	3.3	61
350	4.7	74
500	6.8	74

MWAI2



LM/FT	W/FT	LM/W
200	3.1	65
350	4.5	78
500	6.5	77

MULTIPLIER TABLES

Use these tables to get results for different color temperatures and CRI for all photometric tables.

HLO/MPO/ MWIO2/ MWAI2

CCT	WATTS		LPW	
	80 CRI	90 CRI	80 CRI	90 CRI
2700K	1.05	1.27	0.95	0.79
3000K	1.02	1.23	0.98	0.81
3500K	1.00	1.19	1.00	0.84
4000K	1.00	1.19	1.00	0.84
5000K	0.96	1.12	1.04	0.89

BDPO/GDPO

CCT	WATTS		LPW	
	80 CRI	90 CRI	80 CRI	90 CRI
2700K	0.93	1.06	1.08	0.94
3000K	0.89	1.03	1.12	0.98
3500K	0.89	1.00	1.12	1.00
4000K	0.88	0.98	1.13	1.02
5000K	0.85	0.95	1.16	1.05

DIRECT/INDIRECT - LPW CALCULATION

For Direct/Indirect performance values, follow the formula.

$$\frac{\left(\begin{array}{cc} \text{DIRECT} & + \\ \text{LM/FT} & \text{LM/FT} \end{array} \right)}{\left(\begin{array}{cc} \text{DIRECT} & + \\ \text{W/FT} & \text{W/FT} \end{array} \right)} = \text{LPW}$$

SLIGHT PENDANT

PATTERN

DIRECT, DIRECT/INDIRECT



Technical Specifications

DIRECT OPTICS

High-Efficiency Lambertian Optic (HLO)

Shielding of diffusing 0.075" thick acrylic provides up to 88% transmission and good obscuration. Matte white reflectors distribute LED output across the shielding. Luminaire brightness is controlled by the ratio of luminous flux to shielding area.



Diamond Prism Optic (DPO)

The Diamond Prism Optic™ (DPO™) is our patent-pending 3-tiered optic meticulously crafted to refract and reflect beams with great precision, effectively keeping glare to a minimum while delivering light of exceptional quality and visual comfort.



Micro-Prism Optic (MPO)

Our precision Micro-Prism Optic™ (MPO™) is a compact marvel engineered to minimize glare and illuminate gently and powerfully. The module's high-quality light output illuminates with a subtle glow to create pleasant lit environments.



INDIRECT OPTICS

Mini Widespread Indirect Optic (MWIO2)

The Mini Widespread Indirect Optic (MWIO2) offers an impressive 160° spread and creates uniform illumination on the ceiling.

Mini Widespread Asymmetric Indirect Optic (MWA12)

The Mini Widespread Asymmetric Indirect Optic (MWA12) is engineered for a wide asymmetric light distribution to create precise lighting placements.

LIGHT SOURCE

Static white

Custom linear array of high-flux LEDs mounted onto aluminum-backed circuitry with quick-connect wiring to facilitate service and optimize thermal management. Available in 2700K, 3000K, 3500K, 4000K, and 5000K with a minimum 80 CRI and an option for 90 CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

Full spectrum

The full spectrum LED option offers improved color particularly in the cyan region that is beneficial in both healthcare and circadian lighting strategies. The cyan region in full spectrum LED is richer at the 480 nm range.

PATTERN LENGTH

All individual sections are joined together onsite using the joiner kits provided. Lumenwerx offers joiner kits that are extremely simple to work with in the field.

ELECTRICAL

Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency > 84%, PF > 0.9, THD < 20%. Other specifiable options include Lutron Hi-Lume 1% Eco, eldoLED 1% ECOdrive 0-10V, eldoLED 0.1% SOLOdrive 0-10V, and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant.

PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, DUO (tunable white), QUADRO (RGBW), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

MOUNTING

Pendant fixtures are mounted with coaxial powered suspension cables.

FINISH

Textured matte white and black. Custom finishes are also available.

CONSTRUCTION

Housing: Extruded aluminum, up to 90% recycled content

Lens: Acrylic

Louvers: Polycarbonate

Joining system: Die cast zinc

End caps: Die cast aluminum

Hanger: Chromed griplock securely attached in end caps and/or joiners with stainless steel hardware

Aircraft cable suspension: Stainless steel aircraft cable 1mm thick

SLIGHT PENDANT

PATTERN

DIRECT, DIRECT/INDIRECT



WEIGHT

Direct	Direct/Indirect
4': 2.2 lbs - 1.0 kg	4': 3.31 lbs - 1.5 kg
8': 4.41 lbs - 2.0 kg	8': 6.61 lbs - 3.0 kg

CERTIFICATION

ETL: Rated for indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.

