

INSTALLATION INSTRUCTIONS



This product must be installed in accordance with the National Electrical Code and all applicable local codes, by a person familiar with the construction and operation of the product, and the hazards involved. Proper grounding is required for safety.

Ce produit doit être installé suivant le code national de l'électricité, ainsi que tous les codes locaux applicables, par une personne familière avec la construction et le fonctionnement du produit, ainsi que tous les risques qui y sont associés. La mise à terre électrique est obligatoire pour la sécurité.



Disconnect power before installation or servicing.



Do not cover the light element lens or heatsink with any materials or adhesive tapes when the fixture is powered.



Handle the LED cartridge carefully during removal and installation. Tools must not touch the LED chips. Contact may result in damage and LED failure.



Wire dimming conductors as Class 1.



A luminaire with more than one power supply connection means shall be connected to only one branch circuit.



For luminaires specified as recessed, clearance between the sides of the luminaire and parts of the building must be 1/2" minimum; clearance to insulating materials to be 3" minimum, unless luminaire is IC rated.



For luminaires installed in wet locations, properly seal all mounting and electrical points.



Warranty claims will not be accepted if incorrect driver or light element is used.

SLIGHT

Surface - Wood Slat Ceiling



SINGLE FIXTURE



For electrical connections, please refer to the [wiring diagram guide](#).




For remote driver box installation instructions, please refer to the [remote driver installation sheet](#).




1 LOCATE T-BAR.

Locate the T-Bar [A] support and gently drop the mounting brackets [B] on it.

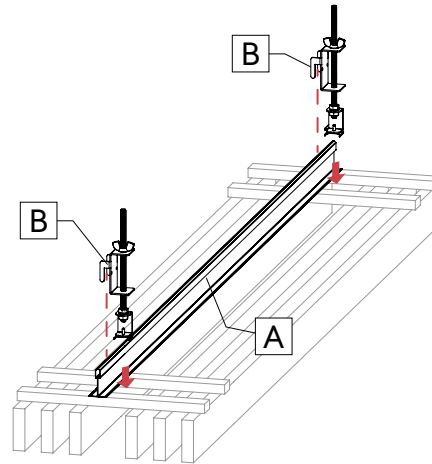



2 POSITION MOUNTING BRACKETS.

Position the mounting brackets [B] on the T-bar [A] according to the provided client drawing.

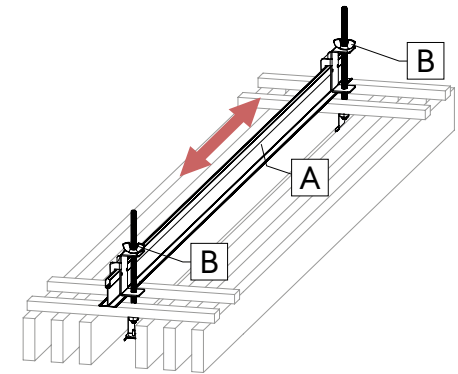

3 SECURE THE MOUNTING BRACKETS.

Secure the mounting brackets [B] by tightening screws [C].

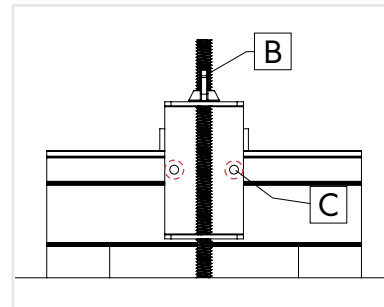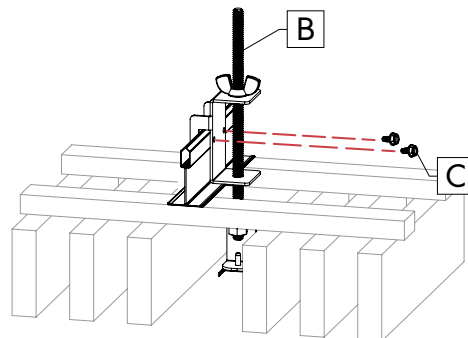

SINGLE FIXTURE


4 MAKE ELECTRICAL CONNECTIONS.

Connect the remote driver to the main power and bring the remote driver cable close to the installation site.

Unfasten the screw and pivot the low-voltage connection box [D] cover. Pass the remote driver cable [E] (by others) through the cable connector (by others), and install onto the low-voltage connection box [D].


Inside the low-voltage connection box make electrical connections between the remote driver cable [E] and fixture cable [J] using wire nuts [F] (by others). Close the low-voltage connection box [D].

Note: Number of wires may vary.

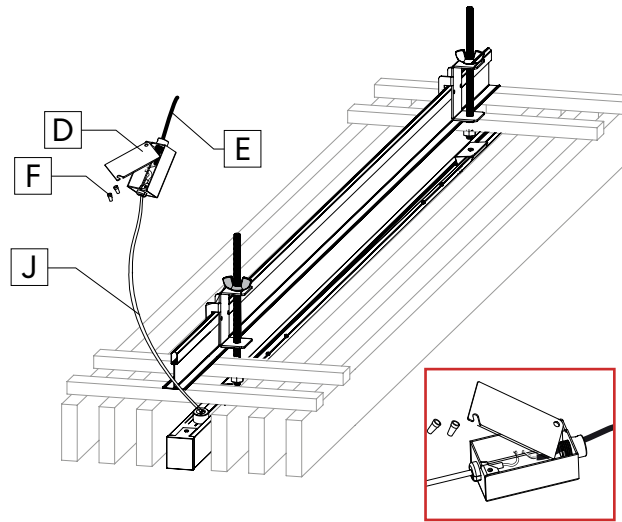


5 INSTALL THE FIXTURE.

Clip the fixture [G] to the mounting brackets [B].

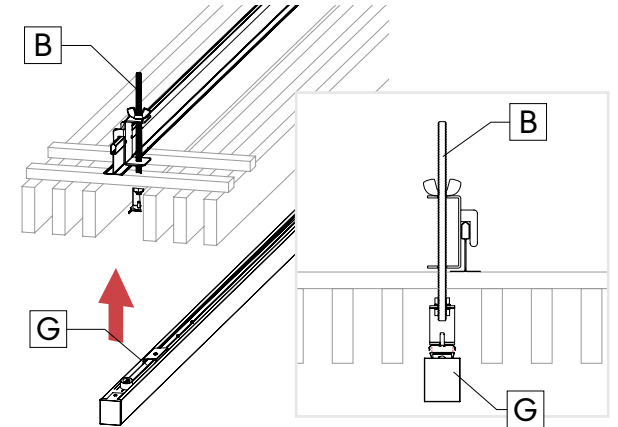

6 ADJUST THE FIXTURE.

Adjust the fixture's [G] height by turning the butterfly nut [H].

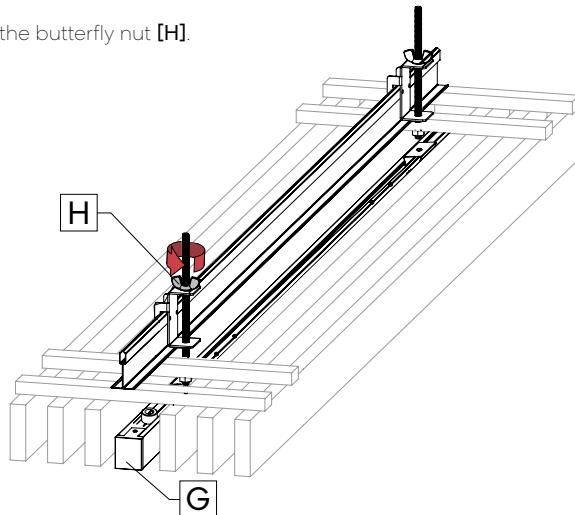

SLIGHT

Surface - Wood Slat Ceiling



CONTINUOUS RUN

1 FOR A CONTINUOUS RUN, FOLLOW STEPS **1 - 3** FROM THE SINGLE FIXTURE INSTRUCTIONS FOR ALL THE FIXTURES IN THE RUN, THEN:


2 JOIN THE FIXTURES.

Remove the set screws **[K]** from the joiner **[L]**.

Align the second fixture **[M]** to the first fixture **[N]**. Join the fixtures together.
Put the set screws **[K]** back and tighten.

Repeat for all fixtures in the run.

Note: Do not overtighten.

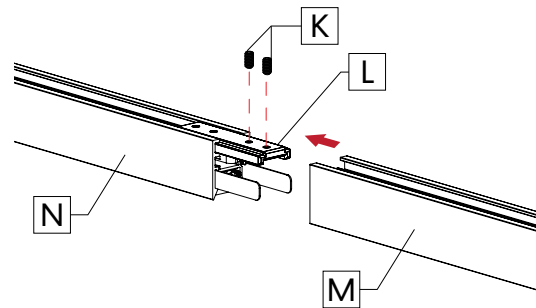

3 FOLLOW STEPS **4 - 6** FROM THE SINGLE FIXTURE INSTRUCTIONS FOR ALL THE FIXTURES IN THE RUN.