


# SMILE ICL LED

PENDANT DIRECT/INDIRECT



**LUMENWERX**  
WWW.LUMENWERX.COM

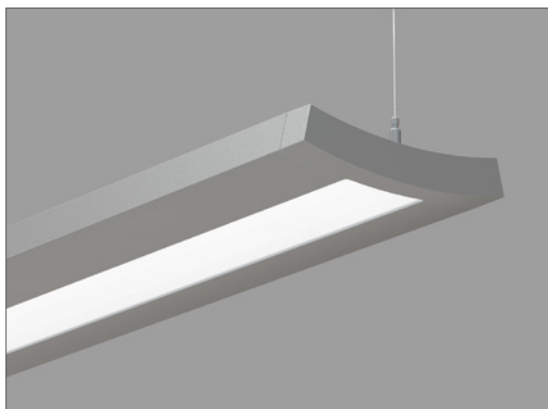

Cable - shown with PMO optics

## DESCRIPTION

### Smile ICL (Independently

### Controllable Light) Smile is a linear

LED luminaire with a gently curved profile and a charming aspect and Independently Controllable Light output of its indirect and direct components. Using advanced LED engines and optical control, Smile provides wide spread uplight and well controlled downlight, delivering both efficient and comfortable illumination. These components can be controlled using a variety of dimming protocols. Smile ICL is offered in a choice of light outputs and color temperatures, together with comprehensive electrical and controls options. Please see additional specification sheets for Smile ICL for wall mounting, as well as Standard Indirect models.

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

NOTES: \_\_\_\_\_


## ORDER GUIDE

SMIPICL	PMO	LED				
LUMINAIRE ID	OPTICS	LIGHT SOURCE	CRI	DIRECT LUMEN PACKAGES	INDIRECT LUMEN PACKAGES	COLOR TEMP.
SMIPICL - Smile pendant independently controllable light	PMO - Precision micro-prism Optic	LED - High performance LED	80 - 80CRI 90 - 90CRI	750 - Min. low output 750lm/ft 875 - Medium output 875lm/ft 1000 - Max. high output 1000lm/ft #### - Other required lm/ft	500 - Min. low output 500lm/ft 750 - Max. medium output 750lm/ft #### - Other required lm/ft	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K


LUMINAIRE LENGTH	VOLTAGE	DRIVER	ELECTRICAL	MOUNTING
#FT - Nominal length in feet Sections - 4', 8' and 12' only Continuous Run - for luminaires over 8' in multiples of 4'	120 - 120V 277 - 277V UNV - 120V-277V 347 - 347V (only available with D1 driver)	D1 - 1% 0-10V DA - DALI LTEA2W - Lutron 1% - 2 wire FP 120V LDE1 - Lutron Hi-lume 1% Eco	1 - 1 circuit 2 - 2 circuits + #EB - Emergency battery (min 4' fixture, except Lutron) + #EM - Emergency light circuit + #NL - Night light circuit + #GTD - Generator transfer device	53WAC36 - Power 5" + non power 3" white canopy (36" aircraft cable) 53WAC36+SC - Sliding cable suspension, power 5" + non power 3" white canopy (36" sliding aircraft cable) 55WSW18 - Power 5" + non power 5" white canopy & stem (18" stem) <a href="#">For all other options refer to our Pendant Mounting Guide</a>

FINISH	CONTROLS	OPTIONS
W - Matte white AL - Aluminum CF# - Custom finish specify RAL#	<u>STANDALONE CONTROLS</u> OMS - Onboard Occupancy ODS - Onboard Daylight OCS - Onboard Occupancy & Daylight <u>CONNECTED CONTROLS</u> CCS() - LU-Lutron, EN-Enlighted, OS-Osram, CR-Crestron. To specify see information on page 3	FU - Fuse TB# - T-bar caddy clip specify grid size TG# - Tegular caddy clip specify grid size ST - Screw Slots caddy clip CU - Custom


## CROSS SECTION

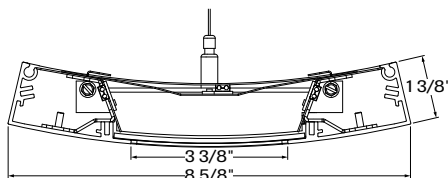

SMIPICL - aircraft cable

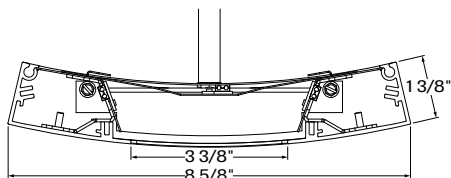

SMIPICL - stem

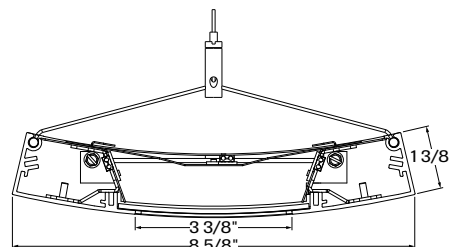

SMIPICL - sliding cable suspension

SMILE-PENDANT-ICL-SPEC-REV2

Page: 1/ 6

November 17, 2021

www.lumenwerx.com (T) 514-225-4304 (F) 514-931-4862 © All rights are reserved to Lumenwerx ULC.  
Lumenwerx ULC. reserves the right to change or modify product specifications without notification



**OPTICS**

**PRECISION MICRO-PRISM-OPTIC (PMO)** - Angled LED array with matte aluminum reflectors and precision Micro-Prism Optic (PMO) shielding of 0.1" thick acrylic. Precisely formed pyramidal prisms with a 0.06" square base provide outstanding control of high-angle brightness.

**LIGHT SOURCE - LED**

Custom linear array of mid-flux LEDs are mounted directly to the housing for optimal thermal performance. Available in 2700K, 3000K, 3500K and 4000K with a minimum 80 CRI and an option for 90 CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. LEDs operated at reduced drive current to optimize efficacy and lumen maintenance.

All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

**PERFORMANCE PER 4' AT 4000K**  
**Medium Output (3000 Lumens)**


LED output	Color Temp	Watts	Direct Lumens	Indirect Lumens	Total Nominal Delivered Lumens	Efficacy LPW
low output	4000K	62.5	3000	3000	6000	96
medium output	4000K	68.5	3500	3000	6500	95
high output	4000K	74.5	4000	3000	7000	94

**Low Output (2000 Lumens)**

LED output	Color Temp	Watts	Direct Lumens	Indirect Lumens	Total Nominal Delivered Lumens	Efficacy LPW
low output	4000K	52	3000	2000	5000	96
medium output	4000K	58	3500	2000	5500	95
high output	4000K	64	4000	2000	6000	94

**LUMINAIRE LENGTH**

Smile is made up of standard 4, 8 and 12 foot sections only that may be joined together to create continuous run lengths. Nominal run length required must be noted in the product code. The minimum individual section available is 4 feet. All individual sections are joined together onsite using the joiner kits provided. Lumenwerx offers joiner kits that are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.



Joining system for Smile  
(without dust cover)

**ELECTRICAL**

Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency > 84%, PF > 0.9, THD < 20%. Other specifiable options include Lutron Hi-Lume 1% (specify 2-wire, or Ecosystem Dim-to-Off), Lutron 5-Series (5% Ecosystem) and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant.

**EMERGENCY**

Factory installed long life high temperature recyclable Ni-Cad battery pack with test switch and charge indicator; minimum of 90 minutes operation, up to 1000 lumens per 4ft (25°C) emergency lighting output. Recharge time of 24 hours.

**MOUNTING OPTIONS**

Fixtures can be pendant-mounted, using aircraft cables, or stem-mounted.

Unless otherwise specified, Lumenwerx provides the following hardware:

**For cable-mounted fixtures** - 53WAC36 (5" white canopy for all power mounting point, 3" white canopy for non power mounting point, and a 36" cable)

**For sliding cable-mounted fixtures** - 53WAC36+SC (5" white canopy for all power mounting point, 3" white canopy for non power mounting point, and a 36" sliding aircraft cable)

**For stem-mounted fixtures** - 55WSW18 (5" white canopy for all power mounting point, and non power mounting point, and a 18" white stem)

**Caddy clips**, if required specify under **OPTIONS**

[For all other options, see our website for a detailed Pendant Mounting Guide](#)

**FINISH**

**Interior** - 95%, reflective matte powder coated white paint

**Exterior** - matte white or aluminum powder coating. Custom finishes are also available.

**CONTROLS**

Lumenwerx offers several options for integrating occupancy and daylight harvesting controls in our luminaires.

**STANDALONE CONTROLS**

An integrated standalone sensor controls the luminaire in which it is installed. Depending on the length, more than one sensor may be necessary and may control the entire luminaire, or just a section of it. These controls operate independently. Unless otherwise agreed, location and functionality of the sensor within the luminaire are selected by Lumenwerx.


Three types are available:

**OMS:** An integral Passive InfraRed (PIR) sensor turns luminaires on and off automatically with field-adjustable time out period. No wall control is used.

Coverage pattern for large motion has a 12' diameter with the sensor mounted 8' above the floor; for small motion, the pattern has an 8' diameter. Typically, one sensor is required for every 10' of a continuous luminaire run.

**ODS:** An integral, daylight harvesting sensor with closed-loop operation dims the luminaire in which it is installed in order to compensate for available daylight. The sensor measures the combination of daylight and luminaire light reflected from horizontal surfaces below the luminaire. Initial onsite calibration is required via the use of provided remote control.

**OCS:** Both an occupancy and a daylight sensor are installed in the luminaire.

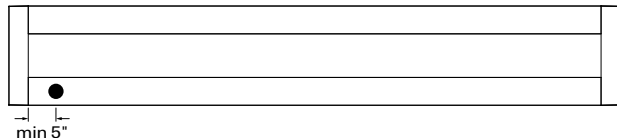

Location of an Onboard control

**CONNECTED CONTROLS**

With Connected Controls, sensors or nodes installed in the luminaire form part of a larger control system infrastructure from manufacturers such as: Lutron\*, Enlighted, Osram ENCELUM, Acuity nLight, Crestron and others. These connected controls allow for a scalable system providing features like occupancy and daylight control, manual control, scheduling and configuration of various zones and scenes. Energy reporting and system monitoring are also possible. Specific capabilities depend on the control system being used.

Lumenwerx installs the components (sensors, nodes, power packs, etc) which may be supplied to us by a third party, or procured directly by Lumenwerx, depending on the control system manufacturer.

Lumenwerx is solely responsible for the installation of specified components; the controls manufacturer is responsible for performance of the control system.

To indicate a Lumenwerx luminaire with Connected Controls, identify the specific onsite control system to be integrated into the luminaires using the ordering code. Due to the diversity of components, you must contact [controls@lumenwerx.com](mailto:controls@lumenwerx.com) to assure complete compatibility with intended control system and to fully specify the luminaire.

Complete control specifications, sensor/node/power pack layout, and narrative for the control system are required for Lumenwerx to create shop drawings and submittals.

\* Lumenwerx offers a Lutron Vive-Enabled fixture option using either the DFCSJ-OEM-OCC (OCS Option) or DFCSJ-OEM-RF (wireless only, no sensor) Integral Fixture Modules and a DALI or EcoSystem LED driver based on customer dimming requirements.

**Please contact our controls department at [controls@lumenwerx.com](mailto:controls@lumenwerx.com) for further assistance.**

**CONSTRUCTION**

**Housing** - Extruded aluminum 0.075" nominal, matte white or aluminum powder coating. Custom finishes are also available.

**End cap** - Die cast aluminum (0.95" nominal)

**Joiners** - Male/female system made in die cast aluminum (0.95" nominal)

**Interior brackets** - Die formed cold rolled sheet steel 20 gauge thick

**Reflectors** - Flat rolled aluminum sheet 0.040" thick precisely die formed, 95% reflective matte white painted

**Hanger** - Chromed griplock securely attached with spring steel hardware in end caps and/or joiners

**Aircraft cable suspension** - 7x7 braids aluminum aircraft cable 0.06" thick

**Stem** - 0.5" diameter threaded steel tube matte white or aluminum powder coating. Custom finishes are also available.

**WEIGHT**

**Smile 4ft** - 9.91lbs - 4.5kg

**Smile 8ft** - 19.16lbs - 8.7kg

**Smile 12ft** - 28.41lbs - 12.9kg

**CERTIFICATIONS**

**ETL** - Rated for Indoor Dry/Damp locations.


Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

### WARRANTY

Lumenwerx provides a five-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.

### PERFORMANCE AT INDIRECT 500 LUMEN PER FOOT


#### 750 LUMEN AT 80CRI - LOW OUTPUT

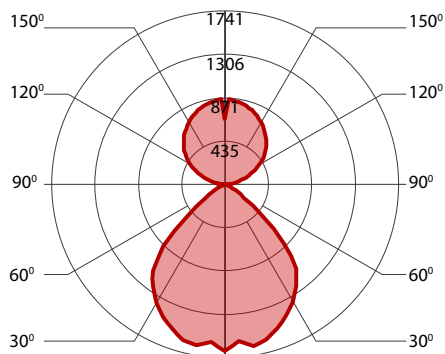

#### PERFORMANCE PER 4'

LED output	Color Temp	Watts	Direct Lumens	Indirect Lumens	Total Nominal Delivered Lumens	Efficacy LPW
low output	3000K	55.5	3000	2000	5000	90
low output	3500K	54	3000	2000	5000	93
low output	4000K	52	3000	2000	5000	96


#### 875 LUMEN AT 80CRI - MEDIUM OUTPUT

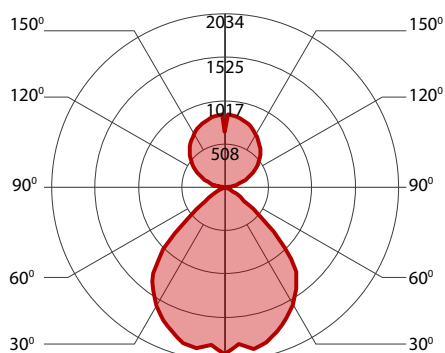

#### PERFORMANCE PER 4'

LED output	Color Temp	Watts	Direct Lumens	Indirect Lumens	Total Nominal Delivered Lumens	Efficacy LPW
medium output	3000K	62	3500	2000	5500	89
medium output	3500K	60	3500	2000	5500	92
medium output	4000K	58	3500	2000	5500	95

#### 1000 LUMEN AT 80CRI - HIGH OUTPUT

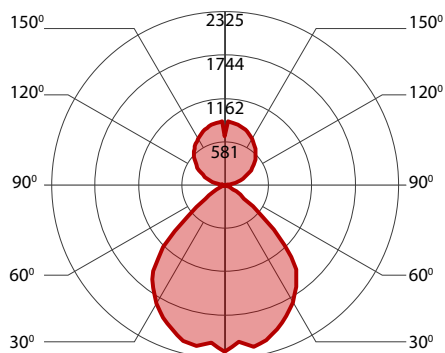

#### PERFORMANCE PER 4'

LED output	Color Temp	Watts	Direct Lumens	Indirect Lumens	Total Nominal Delivered Lumens	Efficacy LPW
high output	3000K	68	4000	2000	6000	88
high output	3500K	66	4000	2000	6000	91
high output	4000K	64	4000	2000	6000	94


# SMILE ICL LED

PENDANT DIRECT/INDIRECT

**LUMENWERX**  
WWW.LUMENWERX.COM

## PERFORMANCE AT INDIRECT 750 LUMEN PER FOOT


### 750 LUMEN AT 80CRI - LOW OUTPUT

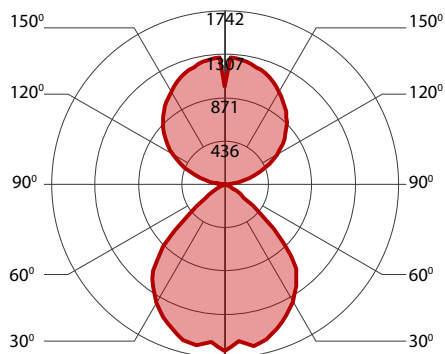

#### PERFORMANCE PER 4'

LED output	Color Temp	Watts	Direct Lumens	Indirect Lumens	Total Nominal Delivered Lumens	Efficacy LPW
low output	3000K	66.5	3000	3000	6000	90
low output	3500K	64.5	3000	3000	6000	93
low output	4000K	62.5	3000	3000	6000	96


### 875 LUMEN AT 80CRI - MEDIUM OUTPUT

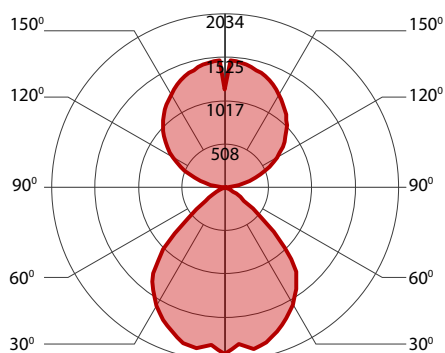

#### PERFORMANCE PER 4'

LED output	Color Temp	Watts	Direct Lumens	Indirect Lumens	Total Nominal Delivered Lumens	Efficacy LPW
medium output	3000K	73	3500	3000	6500	89
medium output	3500K	70.5	3500	3000	6500	92
medium output	4000K	68.5	3500	3000	6500	95

### 1000 LUMEN AT 80CRI - HIGH OUTPUT

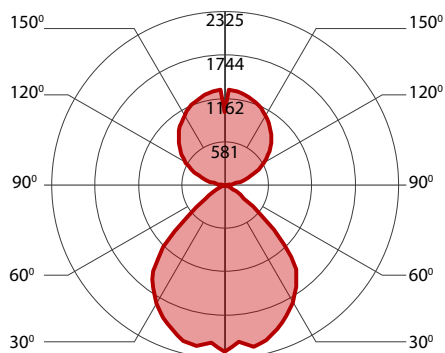

#### PERFORMANCE PER 4'

LED output	Color Temp	Watts	Direct Lumens	Indirect Lumens	Total Nominal Delivered Lumens	Efficacy LPW
high output	3000K	79.5	4000	3000	7000	88
high output	3500K	77	4000	3000	7000	91
high output	4000K	74.5	4000	3000	7000	94