


NOTE: Wire dimming conductors as Class 1



This product must be installed in accordance with the National Electrical Code and all applicable local codes, by a person familiar with the construction and operation of the product, and the hazards involved. Proper grounding is required for safety.


Ce produit doit être installé suivant le code national de l'électricité, ainsi que tous les codes locaux applicables, par une personne familière avec la construction et le fonctionnement du produit, ainsi que tous les risques qui y sont associés. La mise à terre électrique est obligatoire pour la sécurité.

1 SINGLE FIXTURE

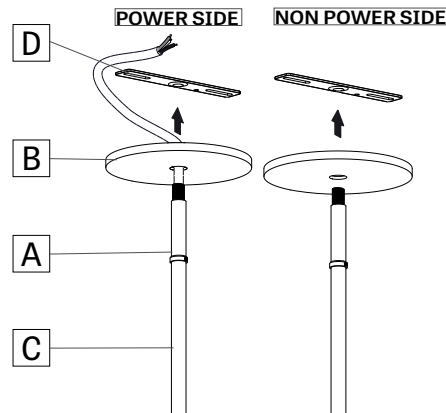


Make sure that the power to the fixture is turned off. Slide the slip ring (A) and the canopy (B) onto the stem (C) and leave some space. Screw the junction box crossbar (D) onto the stem (C).

2 FOR EMERGENCY CIRCUIT

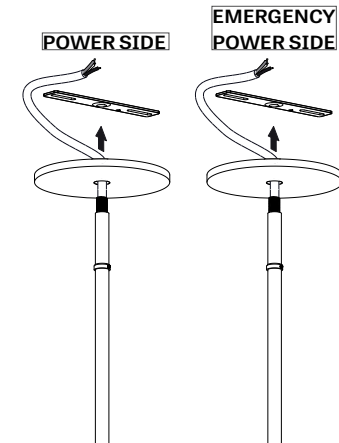


In the case where an **emergency circuit** is required, the wires to the emergency circuit will be passed through a second stem.

3 FOR FIXTURE IN GRID CEILING

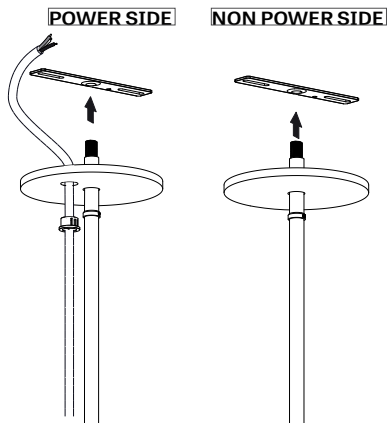


In the case where the luminaire is installed on a **grid ceiling**, the power cable will pass outside of the stem.

4

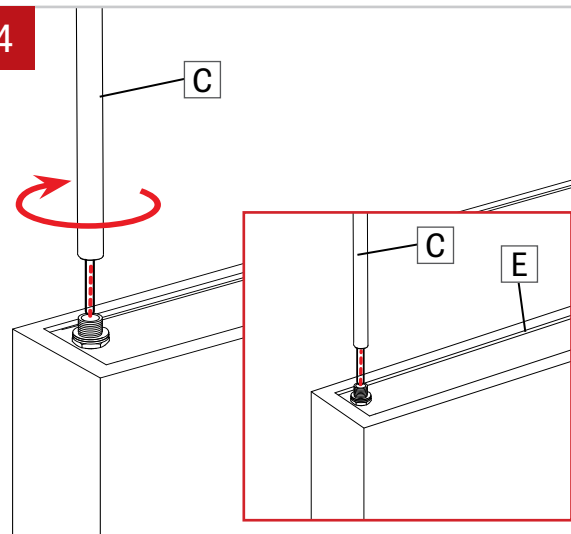


Screw the stems (C) onto the nipple at the ends of the fixture (E).

5 CONTINUOUS SYSTEM

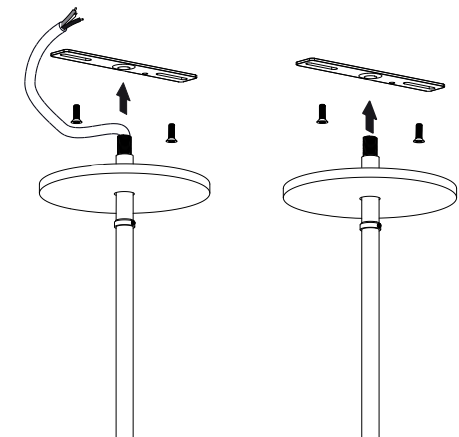


For a continuous system, repeat steps 1 to 3 for all mounting hardware.

6 LOUVERS

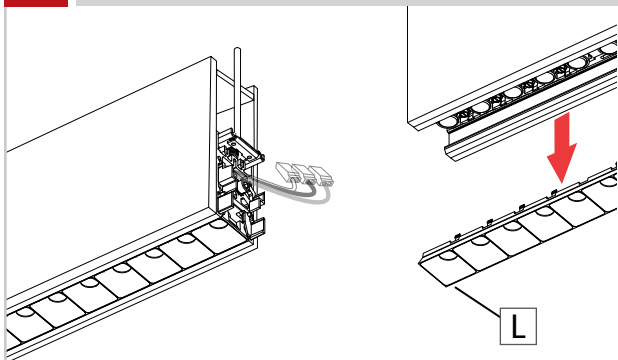


For louvers, remove the louver (L) on the second fixture.

7 LOUVERS

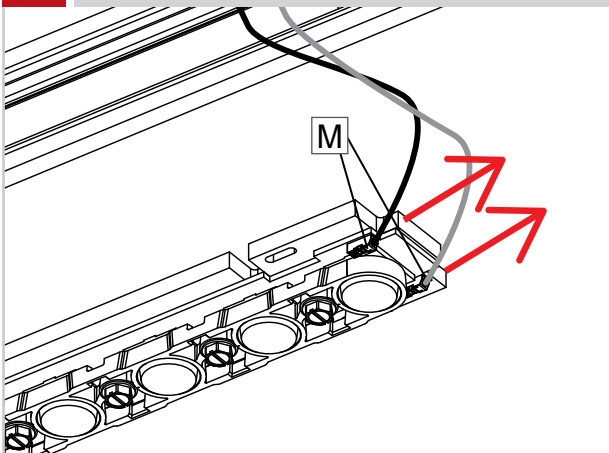


Disconnect LED mox connector (M) by taking a pointed object and pressing on the two tabs on each side.

8 LOUVERS

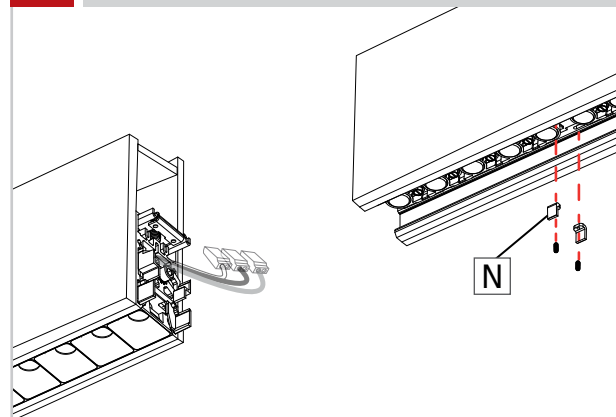


Unscrew the L brackets (N) retaining the cartridge. Keep them in a safe place.

9 LOUVERS

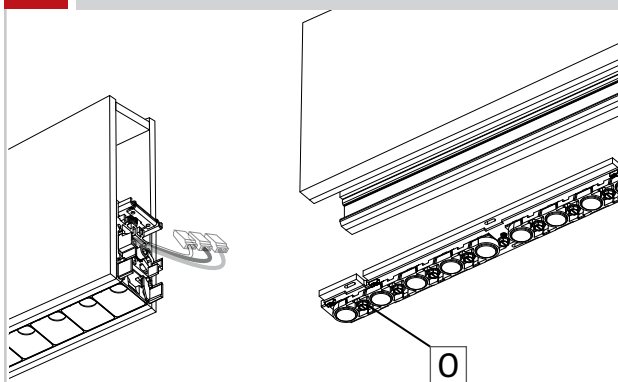


Gently lowers cartridge (O) from the extrusion.

10 HLO

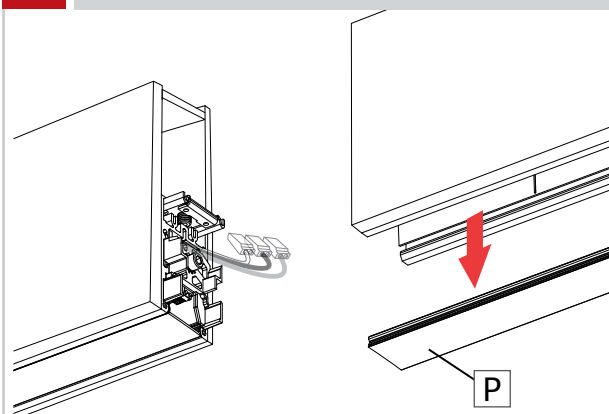


For HLO, Remove the lens (P) on the second fixture.

11 HLO

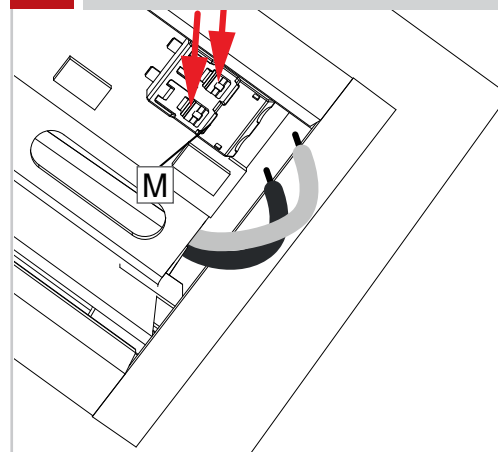


Disconnect LED mox connector (M) by taking a pointed object and pressing on the two tabs on the top.

12 HLO

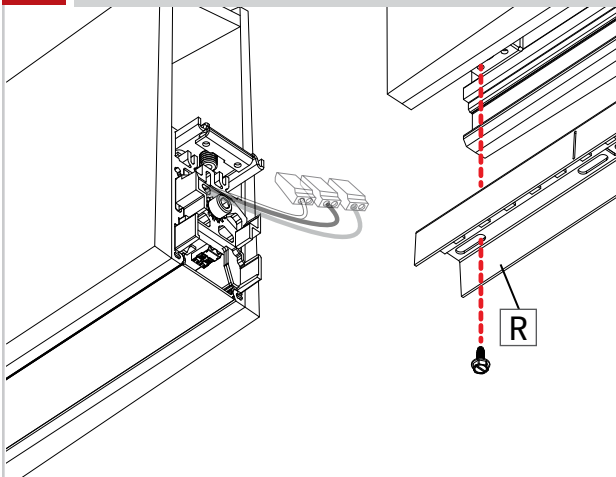


Unscrew cartridge (R) from brackets. Gently lowers cartridge (R) from the extrusion.

13 PARABOLIC LOUVERS

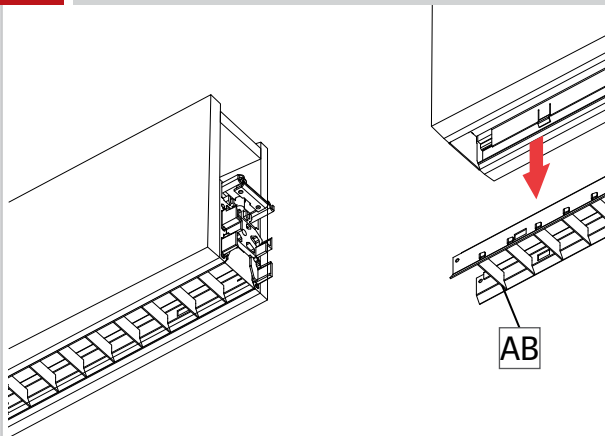


For Parabolic Louvers, remove the Parabolic Louvers (AB) on the second fixture.

14 PARABOLIC LOUVERS

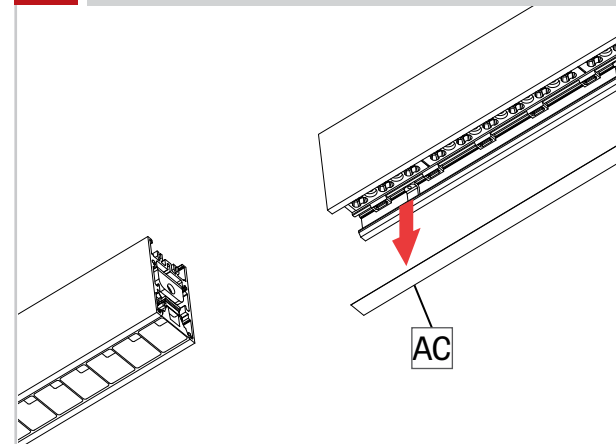


Remove the Overlay (AC). Keep it in a safe place.

15 PARABOLIC LOUVERS

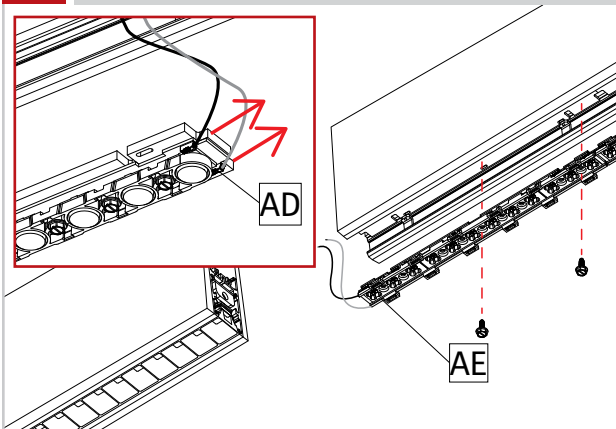


Disconnect LED mox connector (AD) by taking a pointed object and pressing on the two tabs on each side. Unscrew cartridge (AE). Gently lowers cartridge (AE) from the extrusion.

16 PARABOLIC LOUVERS

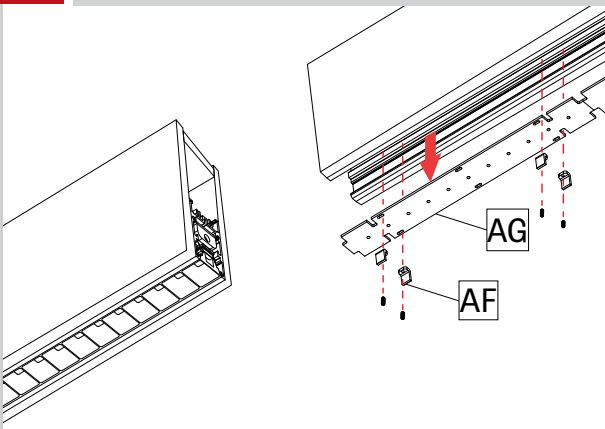


Unscrew the L brackets (AF) retaining the heat sink. Gently lowers Heat sink (AG) from the extrusion. Keep them in a safe place.

17

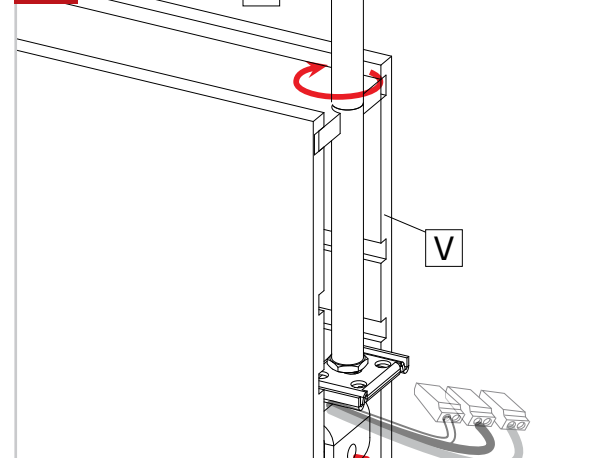


Push the aircraft cables (H) on the first fixture (V) (as shown in step 4). Install the aircraft cable on the second fixture.

18

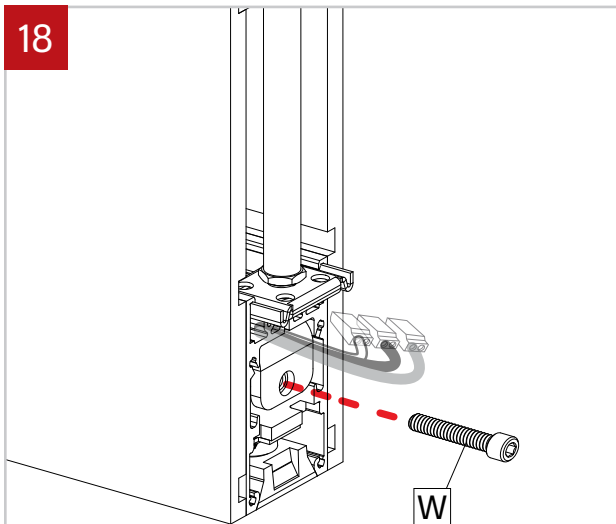


Remove the screw (W) on the joiner and put them in a safe place.

19

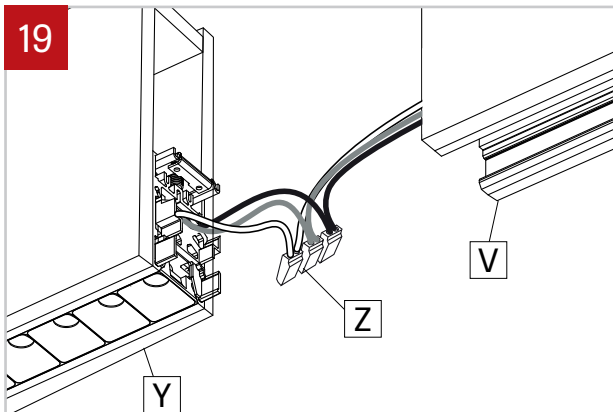


Connect wires between joining fixtures (V) and (Y) using wires connectors (Z). Push the connectors inside the second fixture (Y). **Number of wires may vary.**

20

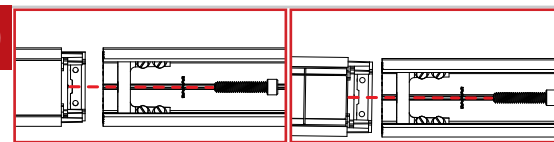

HLO

Baffles

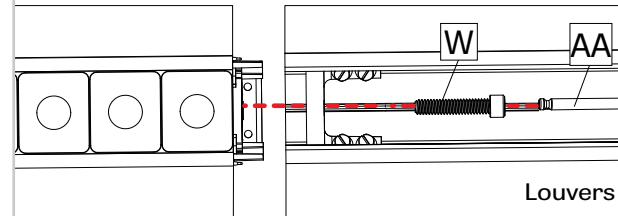


Louvers

Join fixtures using align pins as guide. Put back in place the provided screw (W) (using 3/16" Ball-End Screwdriver (AA) provided). Make sure that no wires or aircraft cable are placed in between the extrusions, preventing the fixtures to be joined. Tighten the screw (W) to pull the extrusions together.

21


LOUVERS

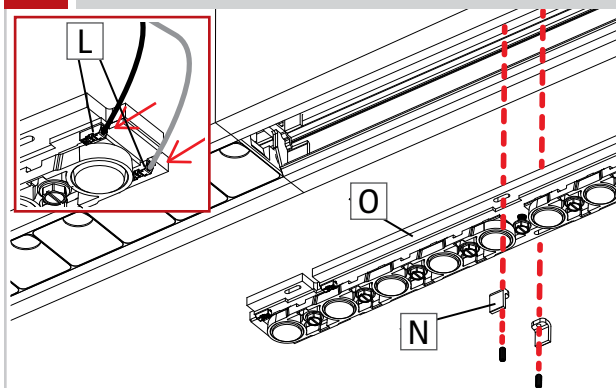

For Louvers, reconnect the LED mox connector (L). **NOTE: connect blue wire into the negative (-) terminal and the red wire into (+) positive terminal.** Screw the cartridge (O) back in place, using the L brackets (N).

22


LOUVERS

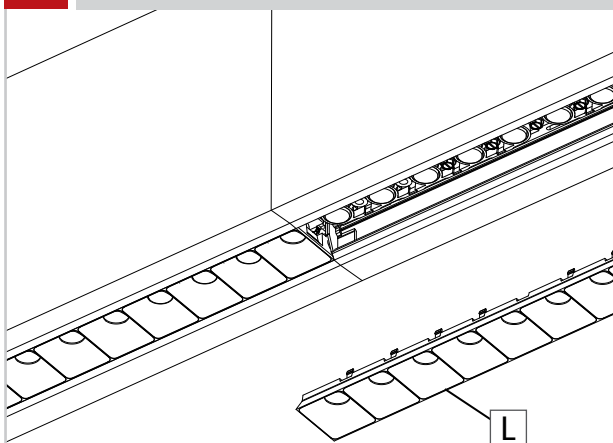

Put back in place the louver (L).


23

HLO

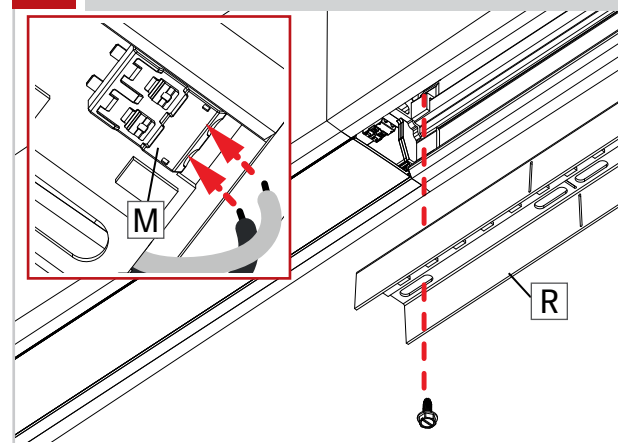


For HLO, reinstall the cartridges (R) and reconnect the LED mox connector (M). **NOTE: connect blue wire into the negative (-) terminal and the red wire into (+) positive terminal.**

24 HLO

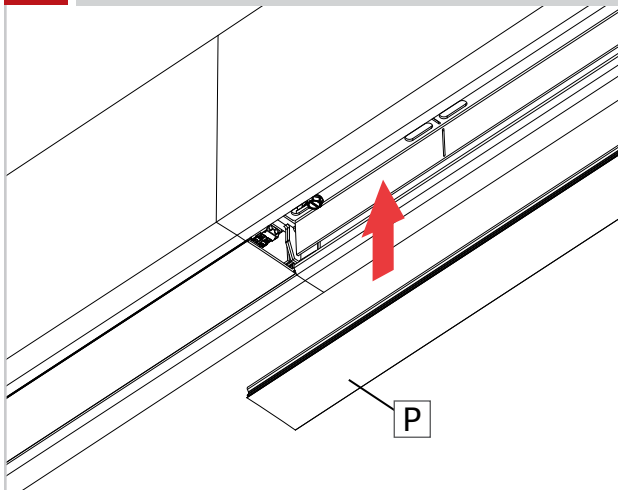


Put back in place the lens (P).

25 PARABOLIC LOUVERS

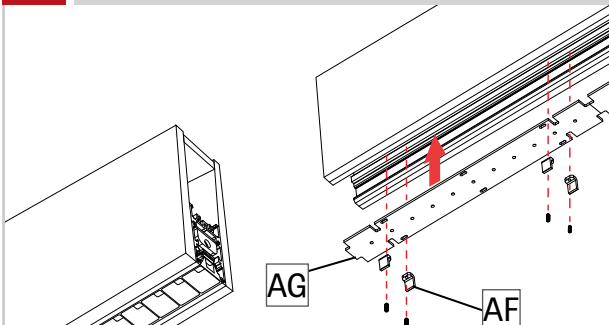


Reinstall the heat sink (AG) and Screw back the L Brackets (AF).

26 PARABOLIC LOUVERS

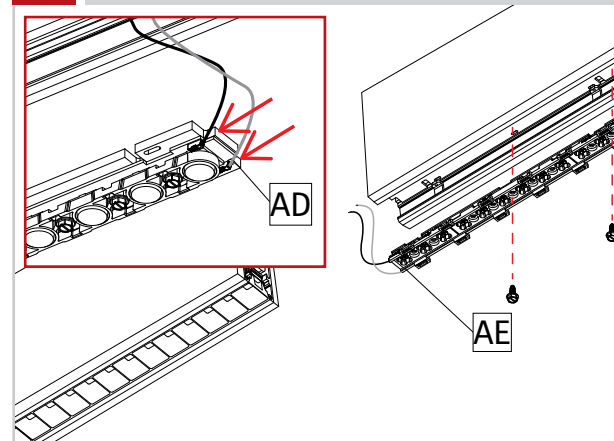

Reconnect LED mox connector (AD). Reinstall LED cartridge (AE).

27 PARABOLIC LOUVERS

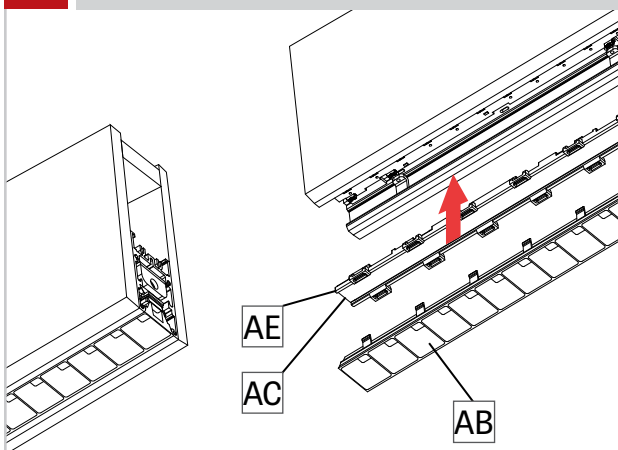

Reinstall the Overlay (AC) and the Parabolic Louvers (AB).