


UBIK SEAL PERIMETER

LUMENWERX

RECESSED PATTERN
STATIC WHITE, FULL SPECTRUM



Project: _____
Type: _____

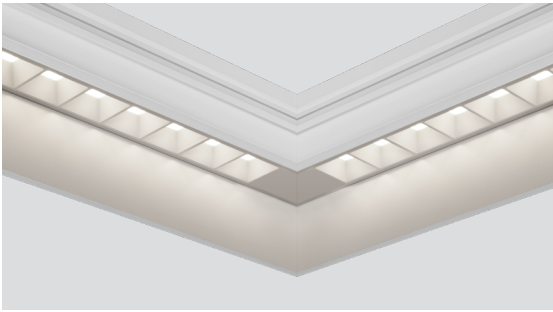

DESCRIPTION

Sleek square form meets superb function in UbiK, a lighting family designed to provide a multitude of creative options. Designed with a 2.5" aperture, UbiK Seal Perimeter offers subtle, low-glare illumination in level, shallow, and deep recessed arrangements with a parabolic louver option for direct illumination. UbiK Seal Perimeter comes in static white and full spectrum. For Chromawerx Sola and Duo solutions, consult other spec sheets.

SENSORS
For latest information on sensors, click [here](#).



IC RATED IP54

Up to 135 lm/W performance

Order Guide

LUMINAIRE ID	DISTRIBUTION	OPTIC	LIGHT SOURCE ²	CRI
	D			
UBISEALPERLP ¹ - UbiK Seal Perimeter Level Pattern UBISEALPERSP ¹ - UbiK Seal Perimeter Shallow Pattern UBISEALPERDP ¹ - UbiK Seal Perimeter Deep Pattern ¹ IP54 rated gasketed construction with an additional clear polycarbonate lens.	D - Direct	MWPL - Matte White Parabolic Louver MSPL - Matte Silver Parabolic Louver MBPL - Matte Black Parabolic Louver	SW - Static white FS - Full spectrum ² Chromawerx Sola and Duo also available. Consult other spec sheet.	80 ³ - 80 CRI 90 ³ - 90 CRI 95 ⁴ - 95 CRI ³ Not available with full spectrum. ⁴ Only available with full spectrum.

LUMEN PACKAGE	COLOR TEMP.	PATTERN LENGTH	CORNER TYPE	CORNER DEGREE	VOLTAGE	DRIVER ⁹
350 - Eco low output 350 lm/ft 500 - Low output 500 lm/ft 750 - Medium output 750 lm/ft 1000 ^{5,6} - High output 1000 lm/ft 1200 ^{5,6} - Ultra high output 1200 lm/ft ⁵ Not available with full spectrum. ⁶ Available for non-IC applications only.	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K	#FT#IN ⁷ - Specify nominal length (#) Standard nominal lengths: Single units: 3' to 12' Continuous runs: lengths over 12' ⁷ Parabolic louvers are only available in 6" increments. If the fixture length is not a multiple of 6", blanks of equal length will be added at both ends of the fixture.	LEVO - Leveled outside corner LEVI - Leveled inside corner	90(#) - 90 degrees, specify number of corners (#) #(#) - Other degrees, specify the angle degree #, followed by the number of corners (#)	120 - 120V 277 - 277V UNV - 120V-277V 347 ⁸ - 347V ⁸ Available with D1 only.	D1 - 1% 0-10V DA ¹⁰ - DALI LTEA2W ¹¹ - Lutron 1% - 2 wire FP 120V LDE1 ¹⁰ - Lutron Hi-lume 1% Eco ELD1 - eldoLED 1% ECOdrive 0-10V ELDO - eldoLED 0.1% SOLOdrive 0-10V ⁹ PoE (Power-over-Ethernet) compatible. Consult factory for details. ¹⁰ On-site commissioning is required. ¹¹ Available with 120V only.

ELECTRICAL	ELECTRICAL SECTIONS (optional) ^{15,16}	MOUNTING	FINISH	OPTIONS
1C - 1 circuit #MC ¹² - Multi circuit EC - Emergency powered fixture NL - Night light fixture DL - Daylight fixture GTD ^{13,14} - Generator transfer device fixture ¹² Specify total number of circuits (#), including any circuits required for electrical section options. Provide drawing or layout specifications. Minimum 4' section per circuit. ¹³ Minimum 4' fixture. ¹⁴ Not available with 347V.	#EC## ¹⁷ - Emergency-powered section #NL## ¹⁷ - Night light section #DL## ¹⁷ - Daylight section #GTD## ^{17,18,19} - Generator transfer device section #EMB ^{19,20} - Emergency powered battery NA - None ¹⁵ Specify with multi circuit (#MC) electrical option only. ¹⁶ Provide drawing or layout specifications. Consult factory for other configurations. Default section length is 4'. ¹⁷ Specify quantity (#), and section length in inches (##). ¹⁸ Minimum 4' section. ¹⁹ Not available with 347V. ²⁰ Specify quantity (#). All batteries will be on the same circuit. Each battery powers a 4' section.	TG9 - Tegular 9/16" TG15 - Tegular 15/16" TB9 - T-bar 9/16" TB15 - T-bar 15/16" ST - Screw slot T-bar DTR - Drywall trim DTL - Drywall trimless DMF - Drywall mud flange	W - Matte white AL - Aluminum B - Matte black WA - White antimicrobial Silverwerx CF# - Custom finish, specify RAL#	FUI20 - Fuse 120V FU277 - Fuse 277V CP - Chicago Plenum GKK - Grid gasket NATA - Natatorium finish CRF - Corrosion resistant finish NA - None

UBIK SEAL PERIMETER

LUMENWERX

RECESSED PATTERN
 STATIC WHITE, FULL SPECTRUM

Pattern




HOW TO SPECIFY A PATTERN?


Please follow these steps when specifying in order to be as precise as possible.

- (1) We require a drawing illustrating the pattern you are trying to achieve - anything from a simple line drawing to elaborate architectural drawings will suffice. Please mark clearly on the drawing the location of the wall.
- (2) Under **PATTERN LENGTH**, enter the overall length of your pattern - either in feet or inches.
- (3) Under **CORNER TYPE**, please enter LEVO for leveled outside corner or LEVI for leveled inside corner.
- (4) Under **CORNER DEGREE**, please enter the angle in degrees of each corner required to complete your pattern, followed by the number of corners.

PATTERN LENGTH	CORNER TYPE	CORNER DEGREE
<p>#FT#IN¹ - Specify nominal length (#)</p> <p>Standard nominal lengths: Single units: 3' to 12' Continuous runs: lengths over 12'</p> <p>¹Parabolic louvers are only available in 6" increments. If the fixture length is not a multiple of 6", blanks of equal length will be added at both ends of the fixture.</p>	<p>LEVO - Leveled outside corner LEVI - Leveled inside corner</p>	<p>90(#) - 90 degrees, specify number of corners (#) #(°) - Other degrees, specify the angle degree #, followed by the number of corners (#)</p>



Inside Corner



Outside Corner


UBIK SEAL PERIMETER

LUMENWERX

RECESSED PATTERN
 STATIC WHITE, FULL SPECTRUM


Photometrics

Watts and lumens per watt may vary based on the type of driver selected.




MWPL - Level - Delivered Lumens at 35K at 80 CRI

LUMENS PER FOOT	TOTAL LUMENS PER 4FT	INPUT WATTAGE	LPW
350	1400	10.4	135
500	2000	15.1	133
750	3000	23.4	128
1000	4000	32.4	124
1200	4800	39.6	121



MWPL - Shallow - Delivered Lumens at 35K at 80 CRI

LUMENS PER FOOT	TOTAL LUMENS PER 4FT	INPUT WATTAGE	LPW
350	1400	10.9	129
500	2000	15.8	127
750	3000	24.6	122
1000	4000	33.9	118
1200	4800	41.5	116



MWPL - Deep - Delivered Lumens at 35K at 80 CRI

LUMENS PER FOOT	TOTAL LUMENS PER 4FT	INPUT WATTAGE	LPW
350	1400	11.2	125
500	2000	16.2	123
750	3000	25.2	119
1000	4000	34.8	114
1200	4800	42.7	112

Multiplier - CCT/CRI - MWPL/MSPL/MBPL


CCT (K)	WATTS		LPW	
	CRI 80	CRI 90	CRI 80	CRI 90
2700	1.04	1.19	0.96	0.84
3000	1.00	1.15	1.00	0.87
3500	1.00	1.12	1.00	0.89
4000	0.99	1.10	1.01	0.91

UBIK SEAL PERIMETER


LUMENWERX

RECESSED PATTERN
STATIC WHITE, FULL SPECTRUM


Cross sections

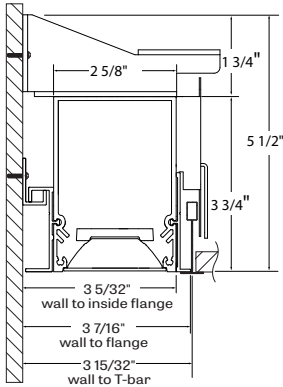

Ubik Seal Perimeter - Level

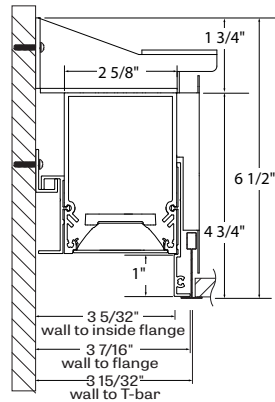

Ubik Seal Perimeter - Shallow

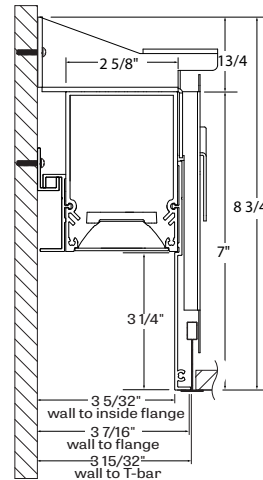

Ubik Seal Perimeter - Deep

Technical Specifications

OPTICS

Parabolic Louvers

Parabolic louvers provide excellent shielding and a pleasing crisp visual texture. The precisely molded louvers consist of 1" deep blades and is 2"x2" in size. The LED array is secured in the direct position, with the light transmitting through a beam-forming lens creating a conical distribution. Three matte (MPL) finishes are available in black, white and silver, offering a soft appearance, a wide beam spread of up 85-91 degrees, gentle brightness transition at cut-off, and exceptional UGR.



LIGHT SOURCE - STATIC WHITE

Custom array of mid-flux LEDs are mounted directly to the housing for optimal thermal performance. Available in 2700K, 3000K, 3500K, and 4000K with a minimum 80 CRI and an option for 90 CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. LEDs operated at reduced drive current to optimize efficacy and lumen maintenance.

All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

LIGHT SOURCE - FULL SPECTRUM

The full spectrum LED option offers improved color particularly in the cyan region that is beneficial in both healthcare and circadian lighting strategies. The cyan region in full spectrum LED is richer at the 480 nm range.

UBIK SEAL PERIMETER

LUMENWERX

RECESSED PATTERN
STATIC WHITE, FULL SPECTRUM



WELL for Light - The WELL building standard focuses on light quality in several features. There are three categories that are fully attributed to the construction and features of a luminaire. In WELL V1, it's Feature 54 Circadian Lighting, Feature 55 Glare Control, and Feature 58 Color Quality. In WELL V2, it's Feature L03 Circadian Lighting, Feature L04 Glare Control, and Feature L07 Electric Light Quality.

This fixture meets Features:

- Feature 54 or L03 when full spectrum is selected
- Feature 58 or L07 when 90 CRI is selected

All LED drivers used at Lumenwerx are deemed to have a low risk level of flicker, of 5 % or less below 90Hz operational as defined by IEEE standard 1789-2015 LED.



WELL for Mind - This luminaire meets WELL for mind as it is a human centric luminaire offering quality light, excellent color, and smooth optics. If any of these features are incorporated in a luminaire, it can improve the ability to focus, concentrate, and persist longer on a given task. This fixture harmoniously operates in a space to assist the mind.

For more information please contact well@lumenwerx.com.

PATTERN LENGTH

All individual sections are joined together onsite using the joiner kits provided. Lumenwerx offers joiner kits that are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.

ELECTRICAL

Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency>84%, PF>0.9, THD<20%. Other specifiable options include Lutron Hi-Lume 1% (specify 2-wire, or Ecosystem Dim-to-Off), eldoLED 1% ECOdrive 0-10V, eldoLED 0.1% SOLOdrive 0-10V, DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant.

PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire, or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, Duo (tunable white), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

ELECTRICAL SECTION OPTIONS

Electrical section options are available for fixtures specified as multi circuit (#MC). With MC, specify the total number of circuits (#), including any circuits required for optional electrical sections. A drawing is required to specify the layout. Please consult factory for custom configurations.

Electrical sections

Options include emergency-powered (#EC##), night light (#NL##), daylight (#DL##), and generator transfer device (#GTD##) sections. Specify the quantity (#), as well as the section length in inches (##).

Example 1: A 32' Direct fixture with two 8' emergency-powered sections on a second circuit.

Code: 2MC-2EC96

Example 2: A 24' Direct fixture with one 4' generator transfer device section.

Code: 1MC-1GTD48

Battery

Each emergency battery (#EMB) powers a 4' section. All batteries will be on the same circuit. Specify the number of batteries (#) required.

Factory installed long life, high temperature, maintenance-free Lithium-Ion battery pack with self-test functionality, test switch and charge indicator. Minimum of 90 minutes operation, up to 1000 lumens per 4' (25°C) emergency lighting output and recharge time of 24 hours.


UBIK SEAL PERIMETER

LUMENWERX


RECESSED PATTERN
 STATIC WHITE, FULL SPECTRUM

MOUNTING OPTIONS


Recessed fixtures can be mounted into exposed or concealed T-bar or tegular grid ceilings.




TG9 - Tegular 9/16"




TG15 - Tegular 15/16"



TB9 - T-bar 9/16"




TB15 - T-bar 15/16"




ST - Screw slot T-bar


Mounting for drywall ceilings are available with visible trim, trimless or mud flange.



DMF - Drywall mud flange



DTR - Drywall trim



DTL - Drywall trimless

CONSTRUCTION

- Housing** - Extruded aluminum (0.070" nominal) up to 90% recycled content
- Joiner bracket (DTL-DTR)** - Cold drawn steel 8 gauge thick
- Joiner bracket (other)** - Galvanized steel 16 gauge thick
- Louvers** - Injection molded optical grade polycarbonate up to 95% reflective
- Parabolic heatsink** - Extruded aluminum (0.10" nominal) up to 90% recycled content
- Recessed flanges** - Extruded aluminum (0.075" nominal) up to 90% recycled content
- End plate** - Aluminum sheet 0.19" thick
- Gasket** - Closed-cell silicone foam gasket.
- Grid gasket (CGK option)** - 1/16" closed-cell silicone foam, assures a better seal between the fixture and the grid.

FINISH

- Interior** - 95%, reflective matte powder coated white paint
- Exterior** - Powder-coat paint in standard white, aluminum, or black. Optional antimicrobial finish, as well as custom finishes, also available.

CERTIFICATIONS

- ETL** - Rated for Indoor Dry/Damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.
- IC rated** - Suitable for direct contact with insulation
- Chicago Plenum** - City of Chicago approved (CCEA)

WARRANTY

Lumenwerx provides a five-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.