


IMPORTANT: Installation instructions are shown with Via 4 and applies to all Via sizes

NOTE: Wire dimming conductors as Class 1




Reflector must be reinstalled with the screw and plastic washer that was originally supplied. If not, it can result in an electrical failure

Make sure to reconnect the wires to the LED boards correctly

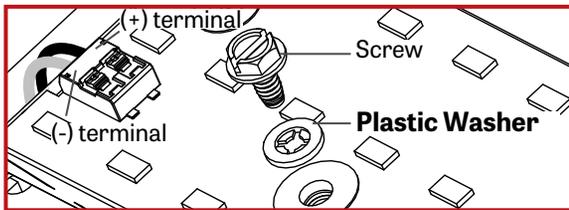


1

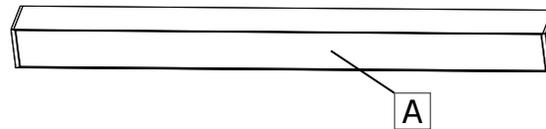


Make sure the power to the fixture (A) is turned off.

2

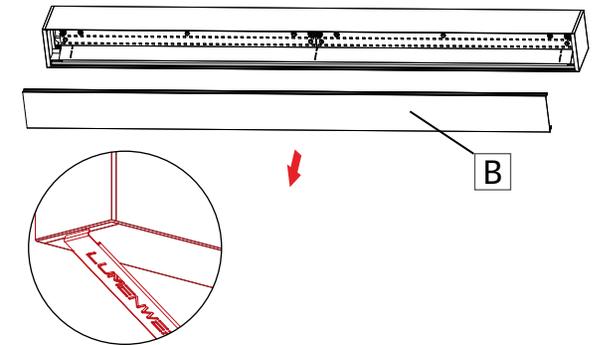


Remove the lens (B).

3

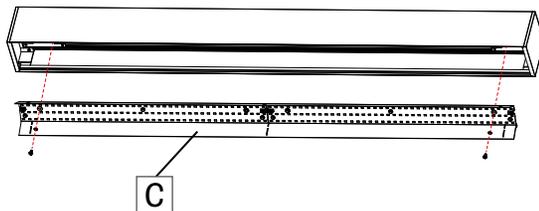


Unscrew the cartridge (C) and place it in a safe place.

4

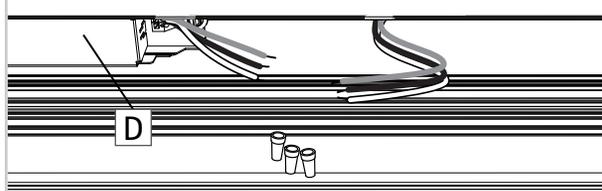

Disconnect wires from the driver (D).


5

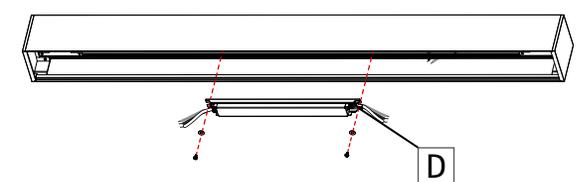

Unscrew the driver (D) from the fixture. Replace the driver and make connection with wire nuts.

IMPORTANT: Installation instructions are shown with Via 4 and applies to all Via sizes

6

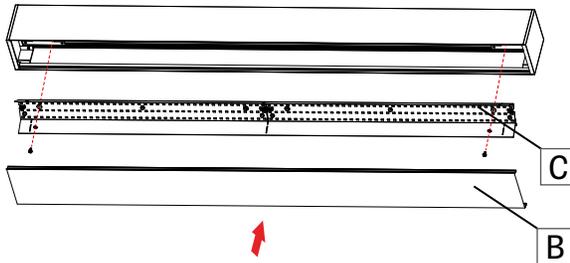

Reinstall the cartridges (C) by using a **screw with plastic washer (VIA 1.5-3-4-5)**. Do not apply too much pressure. Reconnect the wires to the LED boards correctly. Put the lens (B) back in place.