


**NOTE:** Wire dimming conductors as Class 1




Reflector must be reinstalled with the screw and plastic washer that was originally supplied. If not, it can result in an electrical failure

Make sure to reconnect the wires to the LED boards correctly

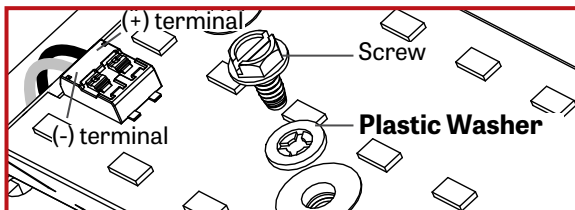


### 1 SINGLE FIXTURE

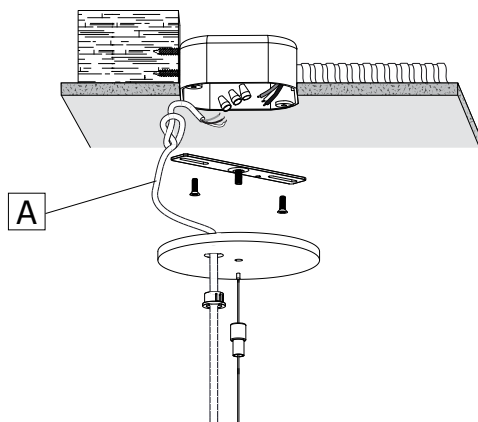


Locate ceiling mounting points according to supplied client drawing. Make a knot in the power cord (A) and then connect it to the ceiling power feed. **Number of wires may vary.**

### 2 POWER SIDE

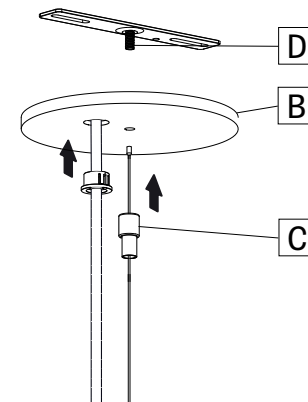


Secure canopy (B) with slip ring (C) on threaded rod (D).


### 3 NON-POWER SIDE

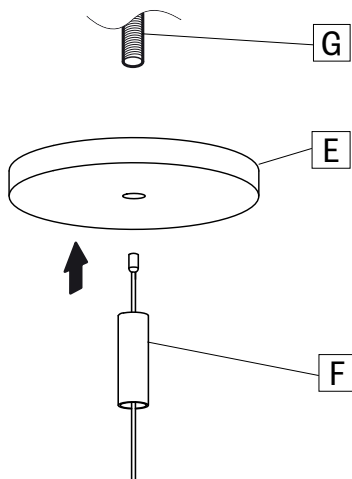

Secure canopy (E) with cable coupler (F) on crimp strud (1/4\"-20) (G) (by other).

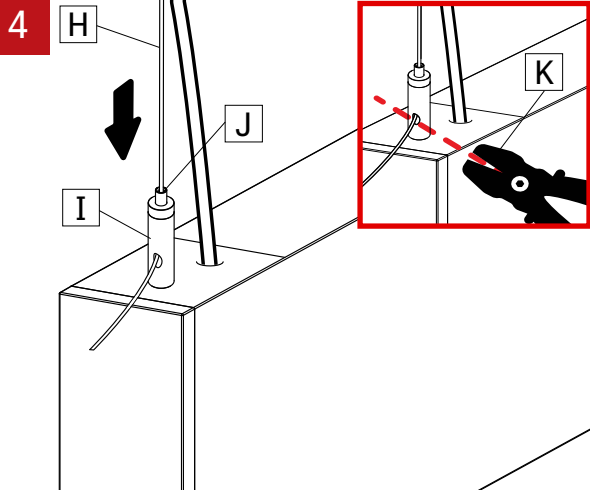


Insert the aircraft cable (H) into the griplock (I). Adjust the cable (H) length by pushing the feeder tube (J) and **cut the excess cable** with an aircraft cable cutter (K).

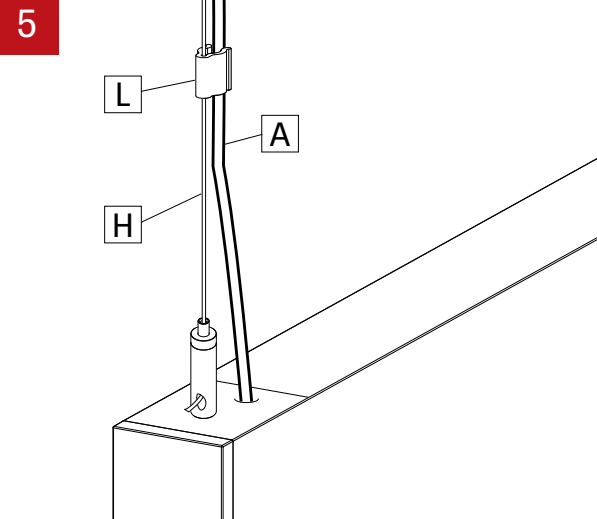

Secure power cord (A) to aircraft cable with plastic clip (L).


### 6 CONTINUOUS SYSTEM

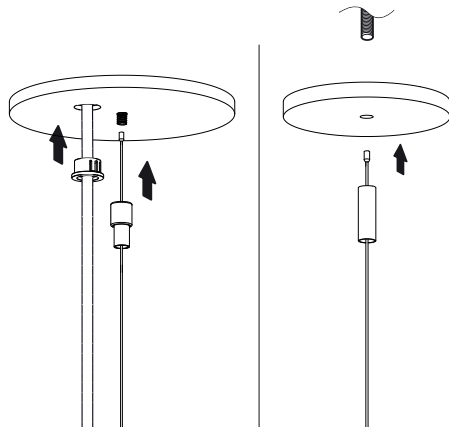


**POWER SIDE**

**NON POWER SIDE**


For a continuous system, repeat steps 1 to 3 for all mounting.

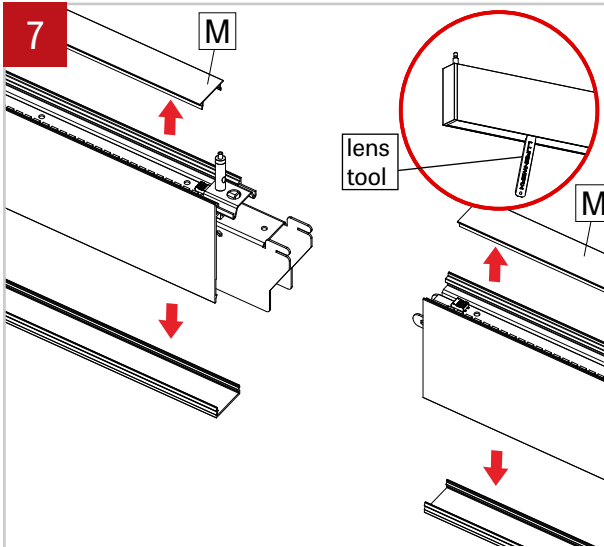


Remove the lenses (M) on both side of the fixture with the included lens tool.

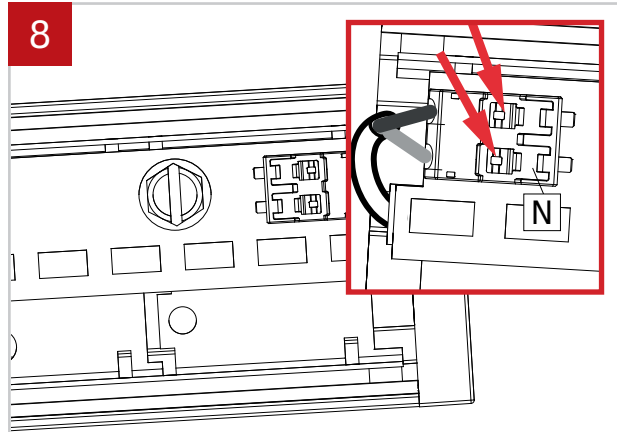


Disconnect LED molex connector (N) on both side by taking a pointed object and pressing on the two tabs on the top.

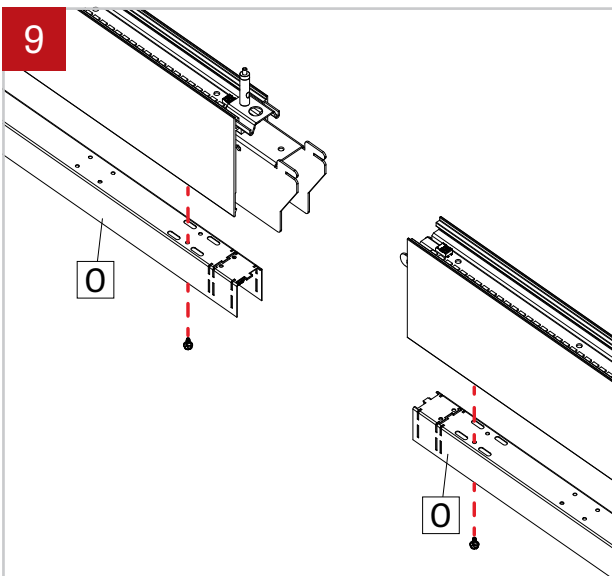


Remove all the end LED cartridges (O).

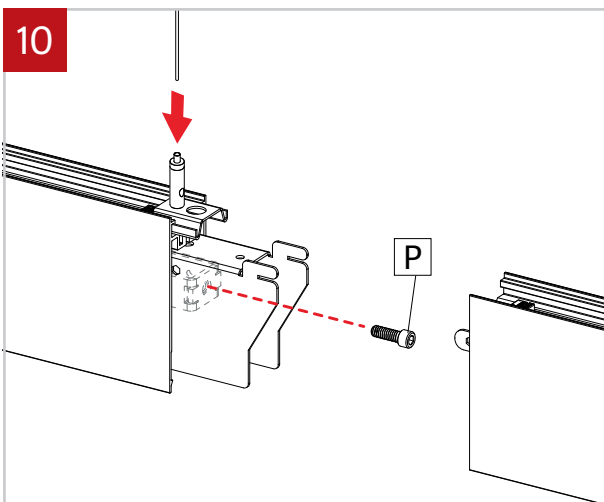


Install the aircraft cables on the first fixture. Then install it on the second fixture (as shown in steps 4 and 5). Remove the screw (P) on the joiner and put it in a safe place.

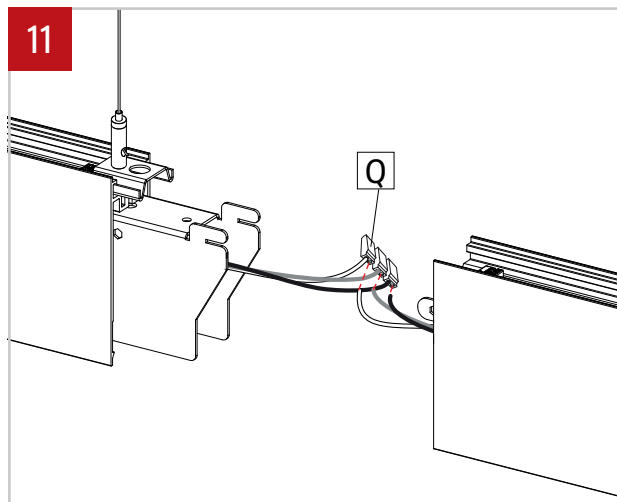


Connect wires between joining fixtures using quick connectors (Q) Push wires inside the second fixture. **Number of wires may vary.**

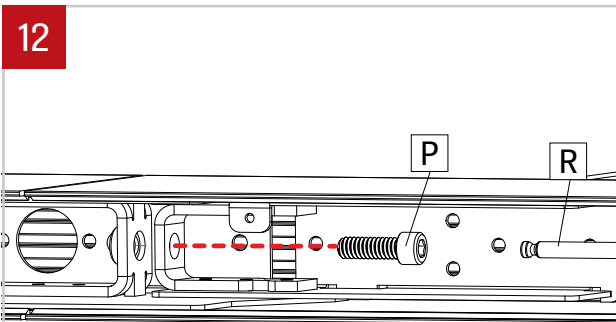

Join fixtures using align pins as guide. Put back in place the provided screw (P) (using 3/16" Ball-End Screwdriver (R) provided). Make sure that no wires are placed in between the extrusions, preventing the fixtures to be joined. Tight the screw (P) to pull the extrusions together. Repeat steps 12 to 14 for all others fixtures in the run.

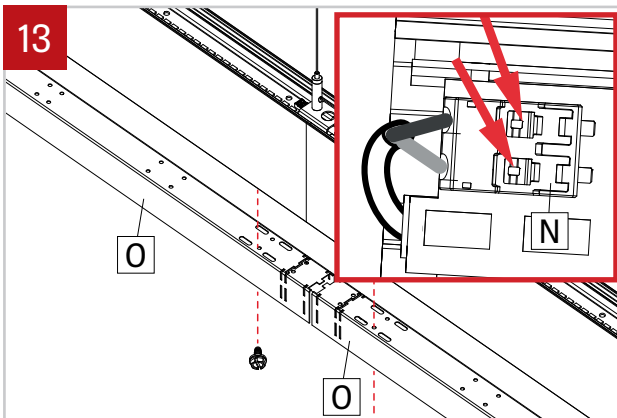

Reinstall the cartridges (O) and reconnect the LED molex connector (N). **NOTE: connect black wire into the negative (-) terminal and the white wire into (+) positive terminal.** Make sure that the wires are not hiding any LED diode. Screw the cartridge back in place by **using screw with plastic washer (for direct only). Do not apply too much pressure.**

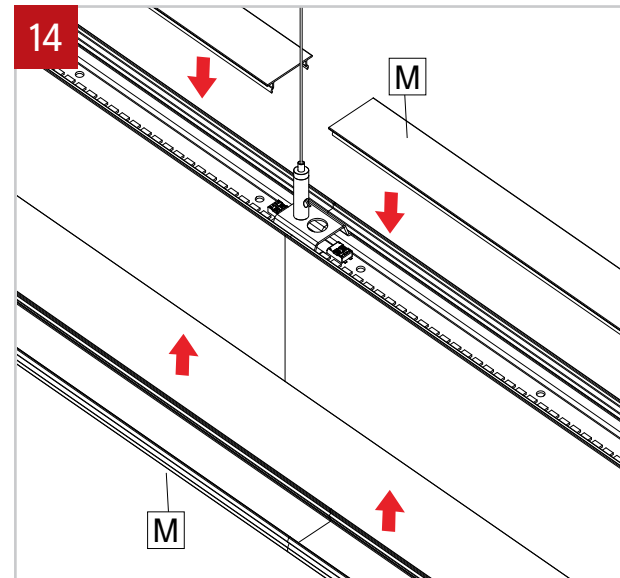

Put the lens (M) back in place. Level all fixtures.