VIA 1.5 PENDANT DIRECT/INDIRECT, DIRECT, INDIRECT

Lumenwerx



DESCRIPTION

Our elegant, flexible Via family is composed of linear, pendant, surface, recessed, and wall mounted luminaires. Each lighting fixture can be installed as a discrete luminaire or in continuous runs or patterns. Via 1.5 Pendant is offered with Lambertian, asymmetric, widespread, or low-glare optics. Via 1.5 Pendant can accommodate the Micro Spot, an adjustable spotlight that extends, rotates 360°, and tilts 90°.

Up to 162 lm/W performance




Declare.

Lens Positions¹

DIRECT OPTICS


STATIC WHITE, BIOS



HLO High-Efficiency Lambertian Optic



WDO Widespread Direct Optic



LGO Low-Glare Optic





WIO2 Widespread Indirect Optic

¹Drop lens positions available with HLO direct lens only ²Available only with Direct/Indirect. ³Not available with Direct/Indirect.



CLO² **Clear Lambertian** Optic







HLO ³ Optic

3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9 T (514) 225-4304 F (514) 931 -4862 www.lumenwerx.com



Lumenwerx reserves the right to modify product specifications without notification. © Lumenwerx, ULC. All rights reserved. VIA1_5-PENDANT-SPEC-REV3 December 10, 2024



DIRECT/INDIRECT, DIRECT, INDIRECT

¹² Not available with ELV/TRI driver options.

500 lm/ft.

¹³ For Direct/indirect, Indirect must not exceed

STATIC WHITE, BIOS

ZLumenwerx

¹⁸ Minimum 3' for Direct/Indirect.

Project:

Type:

Order Guide

LUMINAIRE ID	DISTRIBUTION	DIRECT OPTIC Specify NA for Indirect fixture	LENS POSITION INDIRECT OPTIC e Specify NA for Indirect fixture Specify NA for Direct fixture				LIGHT SOURCE ⁶		
VIA1.5P									
VIA1.5P - Via 1.5"	DI - Direct/ HLO - High-Efficiency Indirect Lambertian Optic D - Direct WDO - Widespread I - Indirect Direct Optic LGO - Low-Glare Optic		FH ' - Flush		Widespread Indired		SW - Static white		
Pendant			1.5D 1 - 1.5" dropWAI2 3NA 1 - Not applicableIndirect		CLO ^{3,4} - Clear Lambertian Optic WAI2 ³ - Widespread Asymmetric ndirect Optic HLO ⁵ - High-Efficiency Lambertian Optic		BIOSST ^{7,8} - BIOS Biological Static BIOSDY ^{7,8} - BIOS Biological Dynamic BIOSTU ^{7,8} - BIOS Biological Tunable		
		NA - Not applicable	 ¹ For HLO, specify FH, 0.5D, or 1.5D. For WDO and LGO, specify FH. For an Indirect fixture, specify NA. ² Not available with BIC ⁴Available only with Direct available with Direct avail		applicable ble with BIOSTU. ble with BIOS. only with Direct/Indirec	with BIOSTU. * with BIOSTU. 7 with BIOS. p y with Direct/Indirect. *		⁶ Chromawerx SOLA, DUO, and QUADRO also available. Consult other spec sheets. ⁷ Only available with low and medium lumen packages. ⁸ See page 6 for details.	
CRI	DIRECT LUMEN Specify NA for Indire		INDIRECT LUMEN PACKAGE Specify NA for Direct fixture		COLOR TEMP.	LUMINAIRE	LENGTH	VOLTAGE	
BOCRI - 80 CRI 90CRI ⁹ - 90 CRI ⁹ Not available with BIOS.	350LMF - Low ou 500LMF - Mediur 750LMF ¹³ - High	m output 500 lm/ft	350LMF ^{10,12} - Low output 350 ln 500LMF - Medium output 500 l 750LMF ¹⁶ - High output 750 lm 900LMF ^{14,15} - Hyper output 900 MA - Not applicable	lm/ft /ft	27K ⁷⁷ - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K ⁷⁷ - 5000K	length (#) in increments	pecify nominal I' and/or 1" minal lengths:	120V - 120V 277V - 277V UNV - 120V-277V 347V ¹⁹ - 347V	
	NA - Not applicat	s. GO.	¹⁴ For Direct fixture only or Indirect fixt ¹⁵ Fixture will be very bright. Use in suit		⁷⁷ Not available with BIOS.	Single units: 2 Continuous r	J.	¹⁹ Available with D1 driver only.	

DRIVER 20	ELECTRICAL	ELECTRICAL SECTIONS (optional) 27, 28	MOUNTING ³³
D1 - 1% 0-10V	1C - 1 circuit	#EC## ²⁹ - Emergency-powered section	ACS - Aircraft cable,
DA 21 - DALI	2C ²³ - 2 circuits	#NL## ²⁹ - Night light section	standard
LDE1 ²¹ - Lutron Hi-lume 1% Eco	#MC ²⁴ - Multi circuit	#DL## ²⁹ - Daylight section	STS - Stem, standard
ELD1 - eldoLED 1% ECOdrive 0-10V	EC - Emergency-powered fixture	#GTD## ^{29, 30, 31} - Generator transfer device section	ACC() - Aircraft cable,
ELDO - eldoLED 0.1% SOLOdrive 0-10V	NL - Night light fixture	#EMB ^{31, 32} - Emergency battery	custom
ELV 22 - ELV 120V	DL - Daylight fixture	NA - None	STC() - Stem, custom
TRI 22 - TRIAC 120V	GTD ^{25, 26} - Generator transfer device fixture		
		²⁷ Specify with multi circuit (#MC) electrical option only.	³³ Standard canopies are
²⁰ PoE (Power-over-Ethernet) compatible.	²³ Available for Direct/Indirect only. Separate direct and indirect	²⁸ Provide drawing or layout specifications. Consult factory for other	black for black fixtures,
Consult factory for details.	circuits.	configurations. Default section length is 4'.	and white for all other
²¹ On-site commissioning is required.	²⁴ Specify total number of circuits (#), including any required for	²⁹ Specify quantity (#), and section length in inches (##).	finishes. See page 3 for
²² Available with 120V only.	electrical section or Micro Spot options. Provide drawing or	³⁰ Minimum 4' section.	full details on standard
	layout specifications. Minimum 4' section per circuit.	³¹ Not available with 347V.	and custom options.
	²⁵ Minimum 4' fixture.	³² Specify quantity (#). All batteries will be on the same circuit. Each	
	²⁶ Not available with 347V.	battery powers a 4' section. For Direct/Indirect, minimum 8' fixture.	

applications.

¹⁶ For Direct/Indirect, Direct must not exceed 500 lm/ft.

FINISH	CONTROL 34		OPTIONS ⁴¹	MODULE (optional) ^{43, 44}	
W - Matte white AL - Aluminum B - Matte black CF# - Custom finish, specify RAL#	STANDALONE CONTROLS ^{35, 36, 37} Specify the quantity (#) of sensors per fixture. #OMS ³⁸ - Onboard Occupancy #OMS## ³⁹ - Onboard Occupancy with bi-level dimming #ODS - Onboard Daylight #OCS - Onboard Occupancy & Daylight	CONNECTED CONTROLS ⁴⁰ LU - Lutron AWNR - Lutron Athena Wireless Node RF Only AWNS - Lutron Athena Wireless Node Sensor EN - Enlighted ENC - Encelium WL - Cooper Wavelinx AN - Acuity nLight CA - Casambi LG - Legrand	FU120 - Fuse 120V FU277 - Fuse 277V CTB9 ⁴² - T-bar caddy clip, 9/16" CTB15 ⁴² - T-bar caddy clip, 15/16" CTG15 ⁴² - Tegular caddy clip, 9/16" CTG15 ⁴² - Tegular caddy clip, 15/16" CST ⁴² - Screw slot caddy clip NA - None "Separate codes with a "+" if more than one is specified.	#MS25() - Micro Spot 25° #MS35() - Micro Spot 35° #MS50() - Micro Spot 50° NA - None ⁴³ See page 3 for ordering details. ⁴⁴ Not available with ELV/TRI drive options.	
		A - None	⁴² Available with aircraft cable only.		
	 ³⁴ Standalone and connected control options cannot combined. ³⁵ Available with D1 driver and 1 circuit options only. ³⁶ Minimum 4' per zone. Provide control zone length. 	³⁸ Fixture turns off when no occupancy. ³⁹ Fixture dims to specified light level % (##).			

T (514) 225-4304 F (514) 931 -4862 www.lumenwerx.com

Intertek

product specifications without notification. © Lumenwerx, ULC. All rights reserved. VIA1_5-PENDANT-SPEC-REV3 December 10, 2024



DIRECT/INDIRECT, DIRECT, INDIRECT STATIC WHITE, BIOS

ZLumenwerx

Example: 1MS25(SW-80CRI-400LM-27K-W)

Module

For a module, specify the options in the parentheses.

MODULE (optional)					
MODULE 1.2	LIGHT SOURCE	CRI	LUMEN PACKAGE 3	COLOR TEMP.	FINISH
#MS25() - Micro Spot 25° #MS35() - Micro Spot 35° #MS50() - Micro Spot 50° NA - None 'Specify quantity (#). 26" blank per module.	SW - Static white	80CRI - 80 CRI 90CRI - 90 CRI	400LM - 400 lm ³ 5 W. Wattage is for reference only. May change based on driver.	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K	W - Matte white B - Matte black

Pendant Mounting Code

Standard

For a standard mounting, please refer to the information below.

MOUNTING ACS - Aircraft cable, standard STS - Stem, standard •Ø 5" for power canopy •Ø 5" for power canopy •Ø 3" for non-power canopy •Ø 5" for non-power canopy Canopies are black for black fixtures, and white for all other fixture finishes Canopies are black for black fixtures, and white for all other fixture finishes Power cord is black for black fixtures, and white for all other fixture finishes Stem finish is the same color as fixture Aircraft cable length is 36" • Stem length is 18" · Stem is not field adjustable

Custom

MOUNTING

Aircraft Cable

For a custom mounting, specify the options in the parentheses.

Example: ACC(3NPC-72IN-W-PCB-SLC)

ACC()					
	NON-POWER CANOPY SIZE	AIRCRAFT CABLE LENGTH	CANOPY FINISH	POWER CORD COLOR	OPTIONS
ACC	3NPC - Ø 3" non-power canopy 5NPC - Ø 5" non-power canopy	36IN - 36" 72IN - 72" 120IN - 120" #IN ¹ - Other lengths, specify in inches ¹ Maximum length is 288" For longer lengths, please consult factory.	W - Matte white AL - Aluminum B - Matte black CF# - Custom finish, specify RAL#	PCW - White PCB - Black	SEM - Seismic mounting SLC - Sloped ceiling for aircraft cable NA - None

Stem

For a custom mounting, specify the options in the parentheses.

Example: STC(5NPC-36IN-W-STW-SLS)

MOUNTIN	IG					
()	NON-POWER CANOPY SIZE	STEM LENGTH	CANOPY FINISH	STEM COLOR	OPTIONS	
STC	SNPC - Ø 5" non-power canopy 18IN - 18" 3GIN - 36" #IN 2 - Specify length in inc. 2 Minimum length is 6". Maximum is 72". Stem is not field adjustab		W - Matte white AL - Aluminum B - Matte black CF# - Custom finish, specify RAL#	STW - Matte white STAL - Aluminum STB - Matte black STCF# - Custom finish, specify RAL#	SLS - Sloped ceiling for stem NA - None	
3/10	3737 Cote Vertu St-Laurent, T (514)	Quebec, Canada H4R 2C9 225-4304 F (514) 931 -4862	product spec	reserves the right to modify ifications without notification	n. bios 📭	

Intertek

www.lumenwerx.com



DIRECT/INDIRECT, DIRECT, INDIRECT STATIC WHITE, BIOS




1.5" Drop Lens¹

3 3/4"

. †

Dimensions

DIRECT/INDIRECT



¹Drop lens positions available with HLO direct lens only.

(tI Intertek

3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9

T (514) 225-4304 F (514) 931 -4862

www.lumenwerx.com

Lumenwerx reserves the right to modify product specifications without notification. © Lumenwerx, ULC. All rights reserved. VIA1_5-PENDANT-SPEC-REV3 December 10, 2024



1/211/2" +1 1/2"+ +11/2"+

0.5" Drop Lens¹

3 3/4"

DIRECT or INDIRECT

3 3/4"

+1 1/2"+

Flush Lens

DIRECT/INDIRECT, DIRECT, INDIRECT STATIC WHITE, BIOS



Photometrics

Values calculated based on a 4' fixture at 3500K and 80 CRI for all optics.


LM/FT

350

500


750

DIRECT OPTICS




WDO

LGO




W/FT

LM/W



13.5



56

INDIRECT OPTICS



LM/FT	W/FT	LM/W
350	24	145
500	3.5	141
750	5.5	136
900	6.8	132



LM/FT	W/FT	LM/W
350	2.3	154
500	3.3	150
750	5.2	144
900	6.4	141



LM/FT	W/FT	LM/W
350	2.5	139
500	3.7	135
750	5.8	130
900	7.1	126



LM/FT	W/FT	LM/W
350	4.8	74
500	7.0	72
750	10.9	69
900	13.4	67

DIRECT/INDIRECT - LPW CALCULATION

For Direct/Indirect performance values, follow the formula.



MULTIPLIER TABLES

Use these tables to get results for different color temperatures, CRI, and drop lenses, for all Direct and Indirect photometric tables.

Multiplier -	CCT/CRI
Multiplici	CCI/CRI

Multiplier - CCT/CRI					Multiplier - Di	rop lens		
сст	WA 80 CRI	TTS 90 CRI	LF 80 CRI	90 CRI		DIRECT LENS	WATTS	LPW
2700K	1.05	1.27	0.95	0.79] [Flush lens	1.00	1.00
3000K	1.02	1.23	0.98	0.81		Drop lens 0.5"	0.89	1.12
3500K	1.00	1.19	1.00	0.84		Drop lens 1.5"	0.88	1.14
4000K	1.00	1.19	1.00	0.84				
5000K	0.96	1.12	1.04	0.89				

MICRO SPOT



Micro Spot 25° Micro Spot 35°



1icro Spot 50°	Lum

Wattage 5.0 CRI 80 90 CCT 2700K 3000K 3500K 4000K 5000K 2700K 3000K 3500K 4000K 5000K nen 373 400 400 432 432 324 344 344 345 372

3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9 T (514) 225-4304 F (514) 931 -4862 www.lumenwerx.com

Intertek

DELIVERED LUMENS

Lumenwerx reserves the right to modify product specifications without notification. © Lumenwerx, ULC. All rights reserved. VIA1_5-PENDANT-SPEC-REV3 December 10, 2024






DIRECT/INDIRECT, DIRECT, INDIRECT STATIC WHITE, BIOS

BIOS

Three BIOS Circadian LED solutions are offered – Biological Static, Biological Dynamic, and Biological Tunable. Use the decision tree below to identify when and where to use BIOS Wellness LED Lighting Solutions.

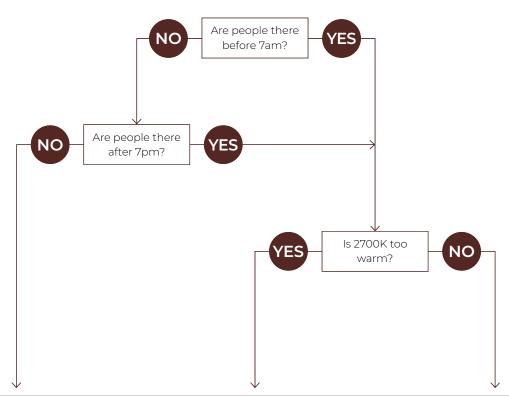

Biological Static BIOSST	Biological Dynamic Biological Tunable BIOSDY BIOSTU		
No CCT change when dimmed	500K shift when dimmed	Dims to 2700K	
Daytime solution	Daytime + evening solution	Daytime + evening solution	
Spaces in operation during daytime hours, between 7am and 7pm	Spaces in operation overnight, after 7pm and before 7am, and when CCT color shift in the evening is not preferred		
E.g. offices, medical/dental offices	E.g. hospitals	E.g. offices, shiftwork	
1 1 1 1 1 1 1 1 1 1 1 1 1 1	Daytime Full BIOS SkyBlue?# Bio-Dimmingf# Bio-Dimmingf# BioS SkyBlue?#Removed	Daytime Full BIOS SkyBlue?" (490m) Bio-Dimmingf* Elos SkyBlue?" Evening BIOS SkyBlue?" Evening BIOS SkyBlue?" Evening BIOS SkyBlue?" Evening BIOS SkyBlue?" Evening BIOS SkyBlue?"	





Lumenwerx reserves the right to modify product specifications without notification. © Lumenwerx, ULC. All rights reserved. VIA1_S-PENDANT-SPEC-REV3 December 10, 2024





DIRECT/INDIRECT, DIRECT, INDIRECT STATIC WHITE, BIOS

Technical Specifications

DIRECT OPTICS

High-Efficiency Lambertian Optic (HLO)

The High-Efficiency Lambertian Optic (HLO) uses matte white reflectors to distribute LED output across 0.075" acrylic shielding, providing up to 88% transmission and good obscuration. Available as a flush lens or as a drop lens, the HLO has a spacing criterion of 1.12.

Widespread Direct Optic (WDO)

The Widespread Direct Optic (WDO) is designed to distribute light far and wide. As such, it has an excellent luminous efficacy, a light span that is 40% farther than that of our traditional HLO, and it maximizes spacing distance while still creating a sense of uniformity. The lens snaps into place and utilizes nano prismatic optics to mask the diodes that are actually emitting the light.

Low-Glare Optic (LGO)

The Low-Glare Optic (LGO) is designed to cut off high-angled light and control glare. The carefully crafted lens refracts light downward through its center from which it then disperses into a wide conical distribution that negates any illumination at about 40°. The LGO provides the visual comfort of a louver in a smooth acrylic lens.

INDIRECT OPTICS

Widespread Indirect Optic (WIO2)

The Widespread Indirect Optic (WIO2) is a horizontal LED array with a widespread indirect micro prismatic optic that offers an impressive 160° spread. WIO2 creates an even illumination for smooth brightness on the ceiling that can achieve uniformity ratios of up to 2:1.

Uniformity [max/min]

Based on 18' continuous runs, in a 20' x 40' room, 10' wall height

Mounting height	Spacing (Center to center)		
from ceiling	8'	10'	12'
12"	5.5	10.0	9.0
18"	3.5	6.0	6.0
24"	2.5	4.0	4.5

Clear Lambertian Optic (CLO)

The Clear Lambertian Optic (CLO) uses a single horizontal LED array and a clear acrylic cover to provide simple uplight with high efficiency.

Widespread Asymmetric Indirect Optic (WAI2)

The Widespread Asymmetric Indirect Optic (WAI2) offers an upward grazing effect with a 45° forward throw. It softly highlights the ceiling in the up-light while distributing the required illumination of the rest of an interior space. For avoiding glare and enjoying visual comfort, WAI2 is an ideal solution.

> 3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9 T (514) 225-4304 F (514) 931 -4862 www.lumenwerx.com

High-Efficiency Lambertian Optic (HLO)

The High-Efficiency Lambertian Optic (HLO) uses matte white reflectors to distribute LED output across 0.075" acrylic shielding, providing up to 88% transmission and good obscuration. HLO has a spacing criterion of 1.12.


LIGHT SOURCE

Static white

Custom linear array of mid-flux LEDs are cartridge-mounted with quick-connect wiring to facilitate service and thermal management. Available in 2700K, 3000K, 3500K, 4000K, and 5000K with a minimum 80 CRI and an option for 90 CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

BIOS

BIOS SkyBlue[™] Technology is designed to provide the specific circadian stimulus to improve overall sleep quality, recovery during the night, and overall feelings of well-being. The non-visual light signals that stimulate our circadian system have peak intensity in the "sky blue" region. As the diagram below illustrates, BIOS SkyBlue technology shifts the peak LED spectral intensity (490 nm) to align better with the peak response of circadian stimulus. Also note the enhanced deep-red (near 660 nm) spectrum.



Three BIOS solutions are offered: BIOS Biological Static (BIOSST), BIOS Biological Dynamic (BIOSDY), and BIOS Biological Tunable (BIOSTU). See page 6 for details.



Lumenwerx reserves the right to modify product specifications without notification. © Lumenwerx, ULC. All rights reserved. VIA1_5-PENDANT-SPEC-REV3 December 10, 2024



DIRECT/INDIRECT, DIRECT, INDIRECT STATIC WHITE, BIOS



LUMINAIRE LENGTH

Via 1.5 is available in standard lengths of 2' to 12'. Continuous runs are available for run lengths over 12'. Exact run length must be noted in the product code. The minimum length is 2' for Direct or Indirect fixtures, and 3' for Direct/Indirect fixtures. Lengths can be ordered in 1' and/or 1" increments. All individual sections are joined together onsite using the joiner kits provided. Lumenwerx offers joiner kits that are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.

ELECTRICAL

Factory-set, adjustable output current LED driver with universal (120-277 VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency>84%, PF>0.9, THD<20%. Other specifiable options include Lutron Hi-Lume 1% Eco, eldoLED 1% ECOdrive 0-10V, eldoLED 0.1% SOLOdrive 0-10V, ELV, TRIAC, and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant.

PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, DUO (tunable white), QUADRO (RGBW), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

ELECTRICAL SECTION OPTIONS

Electrical section options are available for fixtures specified as multi circuit (#MC). With MC, specify the total number of circuits (#), including any circuits required for optional electrical sections. A drawing is required to specify the layout. Please consult factory for custom configurations.

Electrical sections

Options include emergency-powered (#EC##), night light (#NL##), daylight (#DL##), and generator transfer device (#GTD##) sections. Specify the quantity (#), as well as the section length in inches (##).

Example 1: A 32' Direct fixture with two 8' emergency-powered sections on a second circuit. Code: 2MC-2EC96

Example 2: A 16' Direct/Indirect fixture with separate circuits for direct and indirect, and with one 4' night light section on the direct side on a third circuit. Code: 3MC-1NL48 Example 3: A 24' Direct fixture with one 4' generator transfer device section. Code: 1MC-1GTD48

Battery

Each emergency battery (#EMB) powers a 4' section. All batteries will be on the same circuit. Specify the number of batteries (#) required.

Factory installed long life, high temperature, maintenance-free Lithium-Ion battery pack with self-test functionality, test switch and charge indicator. Minimum of 90 minutes operation, up to 1000 lumens per 4' (25°C) emergency lighting output and recharge time of 24 hours.

MOUNTING

Pendant fixtures can be mounted either with aircraft cable or with stem. See page 3 for details.

FINISH

Interior: 95%, reflective matte powder coated white paint **Exterior**: Matte white, matte black or aluminum powder coating. Custom finishes are also available.

CONTROLS

Lumenwerx offers several options for integrating occupancy and daylight harvesting controls in our luminaires. For latest information on sensors, click <u>here</u>.



Standalone controls

An integrated standalone sensor controls the luminaire in which it is installed. Depending on the length, more than one sensor may be necessary and may control the entire luminaire, or just a section of it. These controls operate independently. Unless otherwise agreed, sensor location, blank size, and functionality of the sensor within the luminaire are selected by Lumenwerx. See client drawings for details.

Three types are available:

<u>OMS</u>: An integral Passive InfraRed (PIR) sensor turns luminaires on and off automatically with field-adjustable time out period. No wall control is used. Coverage pattern for large motion has a 12' diameter with the sensor mounted 8' above the floor; for small motion, the pattern has an 8' diameter. Typically, one sensor is required for every 10' of a continuous luminaire run.





Lumenwerx

DIRECT/INDIRECT, DIRECT, INDIRECT STATIC WHITE, BIOS

<u>ODS</u>: An integral, daylight harvesting sensor with closed-loop operation dims the luminaire in which it is installed in order to compensate for available daylight. The sensor measures the combination of daylight and luminaire light reflected from horizontal surfaces below the luminaire. Initial onsite calibration is required via the use of provided remote control.

<u>OCS</u>: Both an occupancy and a daylight sensor are installed in the luminaire.

Connected controls

With connected controls, sensors or nodes installed in the luminaire form part of a larger control system infrastructure from manufacturers such as: Lutron, Enlighted, Encelium, Cooper Wavelinx, Acuity nLight, Casambi, Legrand, and others. These connected controls allow for a scalable system providing features like occupancy and daylight control, manual control, scheduling and configuration of various zones and scenes. Energy reporting and system monitoring are also possible. Specific capabilities depend on the control system being used.


Lumenwerx installs the components (sensors, nodes, power packs, etc) which may be supplied to us by a third party, or procured directly by Lumenwerx, depending on the control system manufacturer.

Lumenwerx is solely responsible for the installation of specified components; the controls manufacturer is responsible for performance of the control system.

To indicate a Lumenwerx luminaire with connected controls, identify the specific onsite control system to be integrated into the luminaires using the ordering code. Due to the diversity of components, you must contact factory to assure complete compatibility with intended control system and to fully specify the luminaire.

Complete control specifications, sensor/node/power pack layout, and narrative for the control system are required for Lumenwerx to create shop drawings and submittals.

MICRO SPOT (MS)

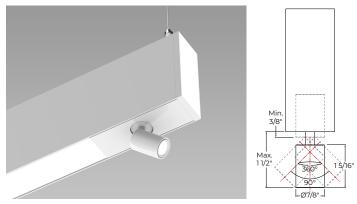

The Micro Spot is a Ø 7/8" x 1 5/16" adjustable spotlight that extends, retracts, rotates 360°, and tilts 90°. Its LED light source is coupled with a TIR refractor to provide beam angles of 25°, 35°, and 50°, while producing up to 400 lumens. LED light source CCT options are 2700K, 3000K, 3500K, 4000K, and 5000K available in either 80 CRI or 90 CRI. The Micro Spot is offered in a white or black finish. The Micro Spot driver is mounted within the luminaire housing and accepts universal input voltage (120-277 VAC) with 0-10V dimming control.

CONSTRUCTION

Housing: Extruded aluminum, up to 90% recycled content Interior brackets: Die-formed cold rolled sheet steel Joining system: Die-cast zinc Reflectors: Die-formed cold rolled steel, 95% reflective matte white painted Lens: Acrylic Drop lens: Extruded with glued end caps End caps: Die-cast aluminum Hanger: Chromed griplock securely attached in end caps and/or joiners with stainless steel hardware Aircraft cable suspension: Ø 1/16" stainless steel aircraft cable Stem: Ø 1/2" threaded steel tube

WEIGHT

Direct/Indirect	Direct or Indirect
4' : 8.26 lbs - 3.75 kg	4' : 7.16 lbs - 3.25 kg
8' : 16.52 lbs - 7.5 kg	8' : 14.32 lbs - 6.5 kg
12' : 24.78 lbs - 11.25 kg	12' : 21.48 lbs - 9.75 kg





DIRECT/INDIRECT, DIRECT, INDIRECT STATIC WHITE, BIOS



CERTIFICATIONS

ETL: Rated for indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0. **Declare**: <u>LBC Red List Approved</u>

WARRANTY

Lumenwerx provides a five-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.



Lumenwerx reserves the right to modify product specifications without notification. © Lumenwerx, ULC. All rights reserved. VIA1_5-PENDANT-SPEC-REV3 December 10, 2024

