

VIA 2 SURFACE

DIRECT
STATIC WHITE, BIOS



Project: _____

Type: _____




DESCRIPTION


Our elegant, flexible Via family is composed of linear, pendant, surface, recessed, and wall mounted luminaires. Each lighting fixture can be installed as a discrete luminaire or in continuous runs or patterns. Via 2 Surface is offered with Lambertian, asymmetric, widespread, wall wash, or low-glare optics. Via 2 Surface can accommodate the Micro Spot, an adjustable spotlight that extends, rotates 360°, and tilts 90°.

Up to 122 lm/W performance


SENSORS
For latest
information
on sensors,
click [here](#).

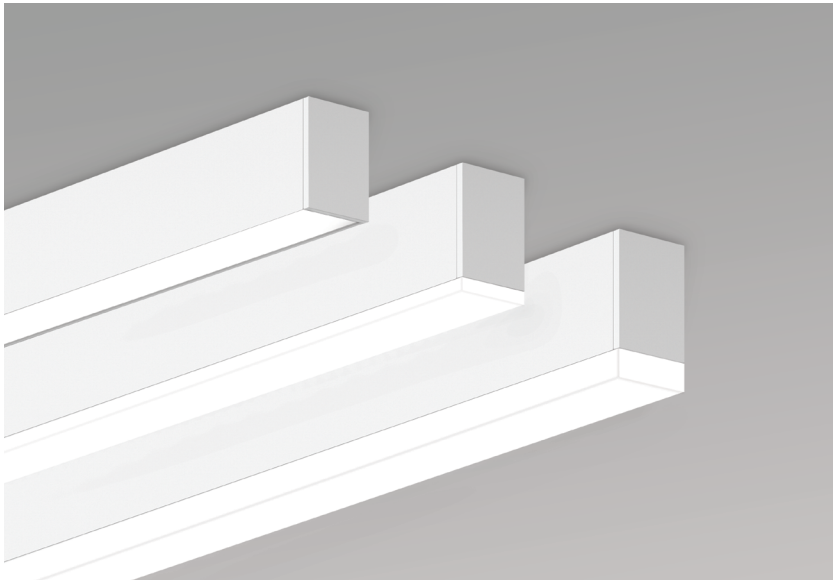


Lens Positions¹

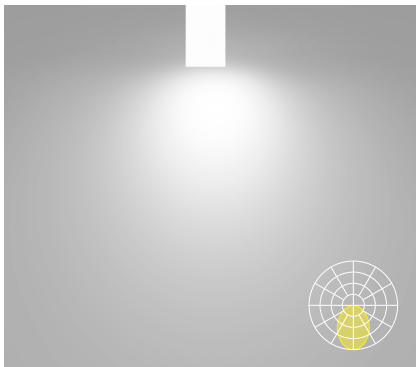


HLO
High-Efficiency Lambertian Optic

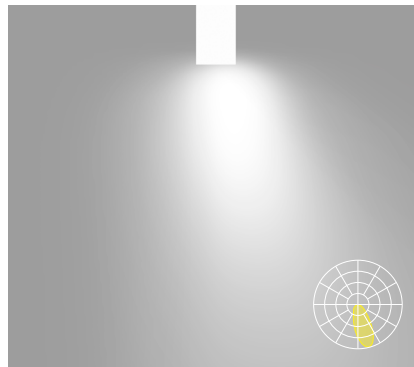


ARO2
Asymmetric Refractive Optic

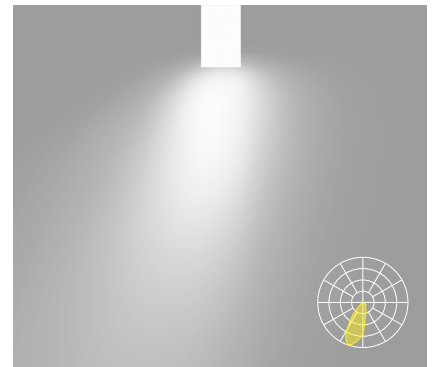

WRO2
Wall Wash Refractive Optic

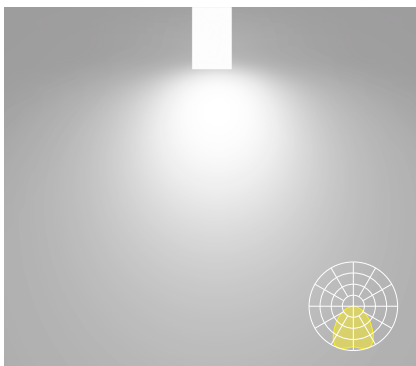

WDO
Widespread Direct Optic

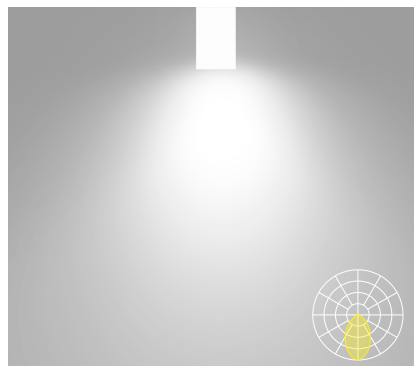

LGO
Low-Glare Optic

¹Drop lens positions available with HLO only.

VIA 2 SURFACE



DIRECT
STATIC WHITE, BIOS

Project: _____
Type: _____

Order Guide

LUMINAIRE ID	DISTRIBUTION	OPTIC	LENS POSITION	LIGHT SOURCE ²
VIA2S	D			
VIA2S - Via 2" Surface	D - Direct	HLO - High-Efficiency Lambertian Optic ARO2 - Asymmetric Refractive Optic WRO2 - Wall Wash Refractive Optic WDO - Widespread Direct Optic LGO - Low-Glare Optic	FH - Flush 0.5D ¹ - 0.5" drop 1.0D ¹ - 1.0" drop ¹ Available with HLO only.	SW - Static white BIOSST ^{3,4} - BIOS Biological Static BIOSDY ^{3,4} - BIOS Biological Dynamic BIOSTU ^{3,4} - BIOS Biological Tunable ² Chromawerx Solo, Duo and Quadro also available. Consult other spec sheets. ³ Only available with low and medium lumen packages. ⁴ See page 5 for details.

CRI	LUMEN PACKAGE	COLOR TEMP.	LUMINAIRE LENGTH	VOLTAGE
80CRI - 80 CRI 90CRI ⁵ - 90 CRI ⁵ Not available with BIOS.	200LMF ^{6,7,8} - Hypo output 200 lm/ft 350LMF - Low output 350 lm/ft 500LMF - Medium output 500 lm/ft 750LMF - High output 750 lm/ft 1000LMF ⁹ - Ultra high output 1000 lm/ft 1200LMF ^{7,10,11} - Hyper output 1200 lm/ft ⁶ Minimum 4' fixture. ⁷ Available with HLO only. ⁸ Not available with ELV/TRI driver options. ⁹ Not available with LGO. ¹⁰ Not available with 90 CRI. ¹¹ Fixture will be very bright. Use in suitable applications.	27K ¹² - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K ¹² - 5000K ¹² Not available with BIOS.	#FT#IN - Specify nominal length (#) in 1' and/or 1" increments Standard nominal lengths: Single units: 2' to 12' Continuous runs: lengths over 12'	120V - 120V 277V - 277V UNV - 120V-277V 347V ¹³ - 347V ¹³ Available with D1 driver only.

DRIVER ¹⁴	ELECTRICAL	ELECTRICAL SECTIONS (optional) ^{20,21}	MOUNTING
D1 - 1% 0-10V DA ¹⁵ - DALI LDE1 ¹⁵ - Lutron Hi-lume 1% Eco ELD1 - eldoLED 1% ECOdrive 0-10V ELDO - eldoLED 0.1% SOLOdrive 0-10V ELV ¹⁶ - ELV 120V TRI ¹⁶ - TRIAC 120V ¹⁴ PoE (Power-over-Ethernet) compatible. Consult factory for details. ¹⁵ On-site commissioning is required. ¹⁶ Available with 120V only.	1C - 1 circuit #MC ¹⁷ - Multi circuit EC - Emergency-powered fixture NL - Night light fixture DL - Daylight fixture GTD ^{18,19} - Generator transfer device fixture ¹⁷ Specify total number of circuits (#), including any required for electrical section or Micro Spot options. Provide drawing or layout specifications. Minimum 4' section per circuit. ¹⁸ Minimum 4' fixture. ¹⁹ Not available with 347V.	#EC## ²² - Emergency-powered section #NL## ²² - Night light section #DL## ²² - Daylight section #GTD## ^{22,23,24} - Generator transfer device section #EMB ^{24,25} - Emergency battery NA - None ²⁰ Specify with multi circuit (#MC) electrical option only. ²¹ Provide drawing or layout specifications. Consult factory for other configurations. Default section length is 4'. ²² Specify quantity (#), and section length in inches (##). ²³ Minimum 4' section. ²⁴ Not available with 347V. ²⁵ Specify quantity (#). All batteries will be on the same circuit. Each battery powers a 4' section.	DRC - Drywall ceiling GRD - Grid ceiling

FINISH	CONTROL ²⁶	OPTIONS	MODULE (optional) ^{34,35,36}
W - Matte white AL - Aluminum B - Matte black CF# - Custom finish, specify RAL#	STANDALONE CONTROLS ^{27,28,29} Specify the quantity (#) of sensors per fixture. #OMS ³⁰ - Onboard Occupancy #OMS## ³¹ - Onboard Occupancy with bi-level dimming #ODS - Onboard Daylight #OCS - Onboard Occupancy & Daylight CONNECTED CONTROLS ³² LU - Lutron AWNR - Lutron Athena Wireless Node RF Only AWNS - Lutron Athena Wireless Node Sensor EN - Enlighted ENC - Encelium WL - Cooper Wavelinx AN - Acuity nLight CA - Casambi LG - Legrand NA - None ²⁶ Standalone and connected control options cannot be combined. ²⁷ Available with D1 driver and 1 circuit options only. ²⁸ Minimum 4' per zone. Provide control zone length. ²⁹ Available with flush lens option only. ³⁰ Fixture turns off when no occupancy. ³¹ Fixture dims to specified light level % (###). ³² Consult factory for connected controls.	FU120 - Fuse 120V FU277 - Fuse 277V ITR ³³ - Integrated track NA - None ³³ Consult factory for details.	#MS25() - Micro Spot 25° #MS35() - Micro Spot 35° #MS50() - Micro Spot 50° NA - None ³⁴ See page 3 for ordering details. ³⁵ If more than one option is specified, separate codes with a "+", e.g. 1MS25(-)+1MS35(-). ³⁶ Not available with ELV/TRI driver options.

VIA 2 SURFACE



DIRECT
STATIC WHITE, BIOS


Module

For a module, specify the options in the parentheses.

Example: 1MS25(SW-80CRI-400LM-27K-W)

MODULES (optional)					
MODULES ^{1,2,3}	LIGHT SOURCE	CRI	LUMEN PACKAGE ⁴	COLOR TEMP.	FINISH
#MS25() - Micro Spot 25° #MS35() - Micro Spot 35° #MS50() - Micro Spot 50° NA - None ¹ Specify quantity (#). ² 6" Blank per module. ³ If more than one option is specified, separate codes with a "+", e.g. 1MS25()+1MS35().	SW - Static white	80CRI - 80 CRI 90CRI - 90 CRI	400LM - 400 lm ⁴ 5 W. Wattage is for reference only. May change based on driver.	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K	W - Matte white B - Matte black

Dimensions

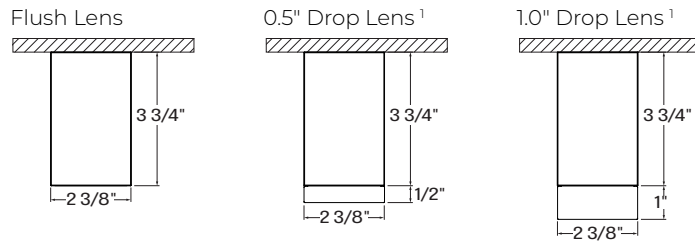

¹ Drop lens positions available with HLO only.

VIA 2 SURFACE




DIRECT
STATIC WHITE, BIOS

Photometrics


Values calculated based on a 4ft fixture at 35K and 80 CRI for all optics.

HLO (Flush Lens)




LM/FT	W/FT	LPW
200	1.8	109
350	3.2	109
500	4.7	107
750	7.2	104
1000	9.9	101
1200	12.2	98

ARO2




LM/FT	W/FT	LPW
350	3.0	116
500	4.4	113
750	7.0	107
1000	9.7	103

WRO2




LM/FT	W/FT	LPW
350	3.0	116
500	4.4	112
750	7.0	107
1000	9.8	102

WDO



LM/FT	W/FT	LPW
350	3.4	104
500	5.0	101
750	7.8	96
1000	11.0	91

LGO



LM/FT	W/FT	LPW
350	3.8	91
500	5.7	88
750	9.1	83

MULTIPLIER TABLES

Use these tables to get results for different color temperatures, CRI, and drop lenses, for all photometric tables.


Multiplier - CCT/CRI

CCT (K)	WATTS		LPW	
	CRI 80	CRI 90	CRI 80	CRI 90
2700	1.05	1.27	0.95	0.79
3000	1.02	1.23	0.98	0.81
3500	1.00	1.19	1.00	0.84
4000	1.00	1.19	1.00	0.84
5000	0.96	1.12	1.04	0.89


Multiplier - Drop Lens

DIRECT LENS	WATTS	LPW
Flush Lens	1.00	1.00
Drop Lens 0.5"	0.99	1.00
Drop Lens 1.0"	0.95	1.05


MICRO SPOT



Micro Spot 25°



Micro Spot 35°



Micro Spot 50°

DELIVERED LUMENS

Wattage	5.0									
CRI	80					90				
CCT	2700K	3000K	3500K	4000K	5000K	2700K	3000K	3500K	4000K	5000K
Lumen	373	400	400	432	432	324	344	344	345	372


VIA 2 SURFACE






DIRECT
STATIC WHITE, BIOS

BIOS

Three BIOS Circadian LED solutions are offered – Biological Static, Biological Dynamic, and Biological Tunable. Use the decision tree below to identify when and where to use BIOS Wellness LED Lighting Solutions.

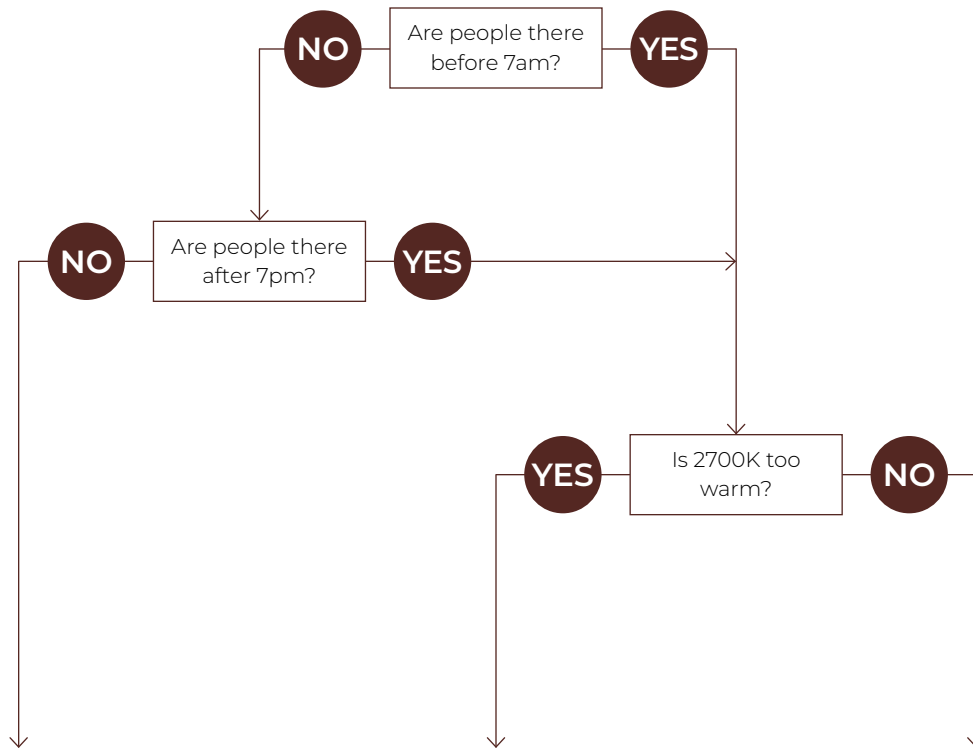

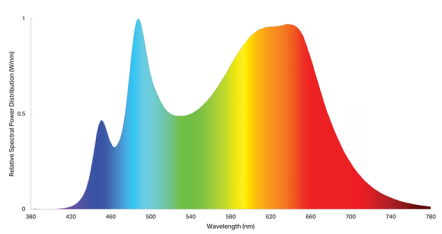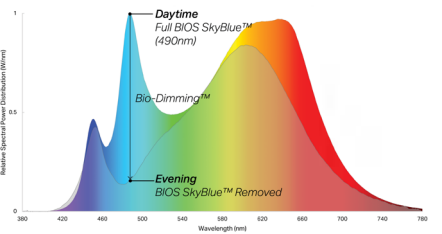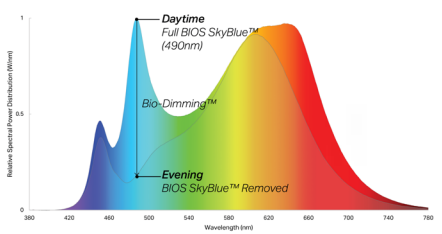Biological Static BIOSST	Biological Dynamic BIOSDY	Biological Tunable BIOSU
No CCT change when dimmed	500K shift when dimmed	Dims to 2700K
Daytime solution	Daytime + evening solution	Daytime + evening solution
Spaces in operation during daytime hours, between 7am and 7pm	Spaces in operation overnight, after 7pm and before 7am, and when CCT color shift in the evening is not preferred	Suitable for spaces in operation overnight, after 7pm and before 7am, and where people do not sleep (CCT color shift in the evening is preferred)
E.g. offices, medical/dental offices	E.g. hospitals	E.g. offices, shiftwork
		

VIA 2 SURFACE

DIRECT
STATIC WHITE, BIOS



Technical Specifications

OPTICS

High-Efficiency Lambertian Optic (HLO)

The High-Efficiency Lambertian Optic (HLO) uses matte white reflectors to distribute LED output across 0.075" acrylic shielding, providing up to 88% transmission and good obscuration. Available as a flush lens or as a drop lens, the HLO has a spacing criterion of 1.06.

Asymmetric Refractive Optic (ARO2)

The Asymmetric Refractive Optic (ARO2) uses a sophisticated reflector combined with a matte beam-shaping film to create a smooth, effective downward light component without shadows or hot spots. It provides directional Gaussian light distribution with peak intensity at 20° above nadir and a 55° Full Width at Half Maximum (FWHM) beam angle. Microstructure material applied to the snap-in lens provides the precise refractive power and visual comfort, while achieving a high luminous efficacy.

Wall Wash Refractive Optic (WRO2)

The Wall Wash Refractive Optic (WRO2) delivers smooth vertical illumination with a gentle gradient and soft visual cut-off. Its exacting configuration creates a strong downward light component without shadows or hot spots and provides light distribution with peak intensity at 21° above nadir. Microstructure material applied to the snap-in lens provides the precise refractive power and visual comfort, while achieving a high luminous efficacy.

Widespread Direct Optic (WDO)

The Widespread Direct Optic (WDO) is designed to distribute light far and wide. As such, it has an excellent luminous efficacy, a light span that is 40% farther than that of our traditional HLO, and it maximizes spacing distance while still creating a sense of uniformity. The lens snaps into place and utilizes nano prismatic optics to mask the diodes that are actually emitting the light.

Low-Glare Optic (LGO)


The Low-Glare Optic (LGO) is designed to cut off high-angled light and control glare. The carefully crafted lens refracts light downward through its center from which it then disperses into a wide conical distribution that negates any illumination at about 40°. The LGO provides the visual comfort of a louver in a smooth acrylic lens.

LIGHT SOURCE - STATIC WHITE

Custom linear array of mid-flux LEDs are cartridge-mounted with quick-connect wiring to facilitate service and thermal management. Available in 2700K, 3000K, 3500K, 4000K, and 5000K with a minimum 80 CRI and an option for 90 CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. LEDs operate at reduced drive current to optimize efficacy and lumen maintenance. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

LIGHT SOURCE - BIOS

BIOS SkyBlue™ Technology is designed to provide the specific circadian stimulus to improve overall sleep quality, recovery during the night, and overall feelings of well-being. The non-visual light signals that stimulate our circadian system have peak intensity in the "sky blue" region. As the diagram below illustrates, BIOS SkyBlue technology shifts the peak LED spectral intensity (490 nm) to align better with the peak response of circadian stimulus. Also note the enhanced deep-red (near 660 nm) spectrum.

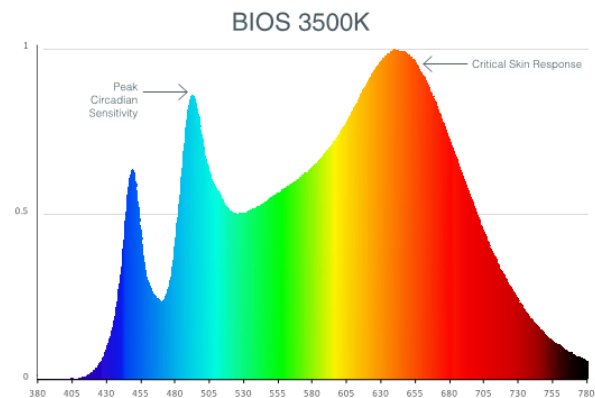

Three BIOS solutions are offered: BIOS Biological Static (BIOSST), BIOS Biological Dynamic (BIOSDY), and BIOS Biological Tunable (BIOSTU). See page 5 for details.

VIA 2 SURFACE



DIRECT
STATIC WHITE, BIOS

LUMINAIRE LENGTH

Via 2 is available in standard lengths of 2' to 12'. Continuous runs are available for run lengths over 12'. Exact run length must be noted in the product code. The minimum length is 2', and can be ordered in 1' and/or 1" increments. All individual sections are joined together onsite using the joiner kits provided. Lumenwerx offers joiner kits that are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.

ELECTRICAL

Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency > 84%, PF > 0.9, THD < 20%. Other specifiable options include Lutron Hi-Lume 1% Eco, eidoLED 1% ECOdrive 0-10V, eidoLED 0.1% SOLOdrive 0-10V, ELV, TRIAC, and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant.

PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, Duo (tunable white), Quadro (RGBW) emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

ELECTRICAL SECTION OPTIONS

Electrical section options are available for fixtures specified as multi circuit (#MC). With MC, specify the total number of circuits (#), including any circuits required for optional electrical sections. A drawing is required to specify the layout. Please consult factory for custom configurations.

Electrical sections

Options include emergency-powered (#EC##), night light (#NL##), daylight (#DL##), and generator transfer device (#GTD##) sections. Specify the quantity (#), as well as the section length in inches (##).

Example 1: A 32' Direct fixture with two 8' emergency-powered sections on a second circuit.

Code: 2MC-2EC96

Example 2: A 24' Direct fixture with one 4' generator transfer device section.

Code: 1MC-1GTD48

Battery

Each emergency battery (#EMB) powers a 4' section. All batteries will be on the same circuit. Specify the number of batteries (#) required.

Factory installed long life, high temperature, maintenance-free Lithium-Ion battery pack with self-test functionality, test switch and charge indicator. Minimum of 90 minutes operation, up to 1000 lumens per 4' (25°C) emergency lighting output and recharge time of 24 hours.

MOUNTING OPTIONS

Fixtures can be mounted directly to T-Bar, drywall and hard surface ceilings, hardware supplied by others. Long runs require a minimum distance of 6" from the vertical wall.

FINISH

Interior - 95%, reflective matte powder coated white paint

Exterior - Matte white, matte black, or aluminum powder coating. Custom finishes are also available.

CONTROLS

Lumenwerx offers several options for integrating occupancy and daylight harvesting controls in our luminaires.

For latest information on sensors, click [here](#).



STANDALONE CONTROLS

An integrated standalone sensor controls the luminaire in which it is installed. Depending on the length, more than one sensor may be necessary and may control the entire luminaire, or just a section of it. These controls operate independently. Unless otherwise agreed, sensor location, blank size, and functionality of the sensor within the luminaire are selected by Lumenwerx. See client drawings for details.

Three types are available:

OMS: An integral Passive InfraRed (PIR) sensor turns luminaires on and off automatically with field-adjustable time out period. No wall control is used. Coverage pattern for large motion has a 12' diameter with the sensor mounted 8' above the floor; for small motion, the pattern has an 8' diameter. Typically, one sensor is required for every 10' of a continuous luminaire run.

ODS: An integral, daylight harvesting sensor with closed-loop operation dims the luminaire in which it is installed in order to compensate for available daylight. The sensor measures the combination of daylight and luminaire light reflected from horizontal surfaces below the luminaire. Initial onsite calibration is required via the use of provided remote control.

OCS: Both an occupancy and a daylight sensor are installed in the luminaire.

VIA 2 SURFACE

DIRECT
STATIC WHITE, BIOS



CONNECTED CONTROLS

With connected controls, sensors or nodes installed in the luminaire form part of a larger control system infrastructure from manufacturers such as: Lutron, Enlighted, Encelium, Cooper Wavelinx, Acuity nLight, Casambi, Legrand, and others. These connected controls allow for a scalable system providing features like occupancy and daylight control, manual control, scheduling and configuration of various zones and scenes. Energy reporting and system monitoring are also possible. Specific capabilities depend on the control system being used.


Lumenwerx installs the components (sensors, nodes, power packs, etc) which may be supplied to us by a third party, or procured directly by Lumenwerx, depending on the control system manufacturer.

Lumenwerx is solely responsible for the installation of specified components; the controls manufacturer is responsible for performance of the control system.

To indicate a Lumenwerx luminaire with connected controls, identify the specific onsite control system to be integrated into the luminaires using the ordering code. Due to the diversity of components, you must contact factory to assure complete compatibility with intended control system and to fully specify the luminaire.


Complete control specifications, sensor/node/power pack layout, and narrative for the control system are required for Lumenwerx to create shop drawings and submittals.

MICRO SPOT (MS)

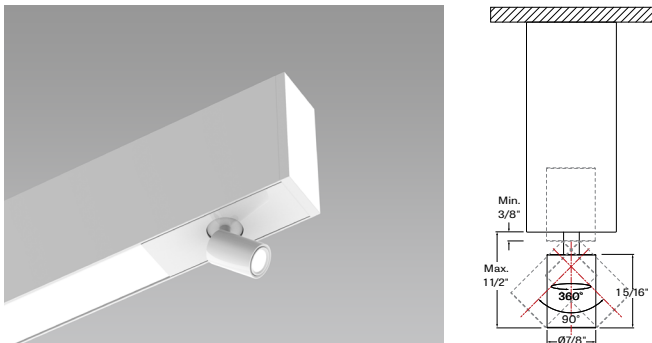

The Micro Spot is a $\text{Ø } 7/8'' \times 1 5/16''$ adjustable spotlight that extends, retracts, rotates 360°, and tilts 90°. Its LED light source is coupled with a TIR refractor to provide beam angles of 25°, 35°, and 50°, while producing up to 400 lumens. LED light source CCT options are 2700K, 3000K, 3500K, 4000K, and 5000K, available in either 80 CRI or 90 CRI. The Micro Spot is offered in a white or black finish. The Micro Spot driver is mounted within the luminaire housing and accepts universal input voltage (120-277VAC) with 0-10 V dimming control.

INTEGRATED TRACK (ITR)



* Images shown as examples, Track model may vary.

Multiple track systems manufactured by others, are offered in Via 2, in individual, or runs, with or without LED integrated sections. Detailed specifications of the track system must be supplied. For other mounting options please consult factory.

CONSTRUCTION

Housing - Extruded aluminum, up to 90% recycled content

Interior brackets - Die-formed cold rolled sheet steel

Joining system - Die-cast zinc

Reflectors - Die-formed cold rolled steel, 95% reflective matte white painted

Lens - Acrylic

Drop lens - Extruded with glued end caps

End caps - Die-cast aluminum

WEIGHT

4ft - 9.03 lbs - 4.1 kg

8ft - 18.28 lbs - 8.3 kg

12ft - 27.97 lbs - 12.7 kg

CERTIFICATION

ETL - Rated for Indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0

WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.