


# VIA 2 SEAL

RECESSED PATTERN  
DIRECT  
STATIC WHITE, BIOS ST/DY  
VIA WEATHER SERIES

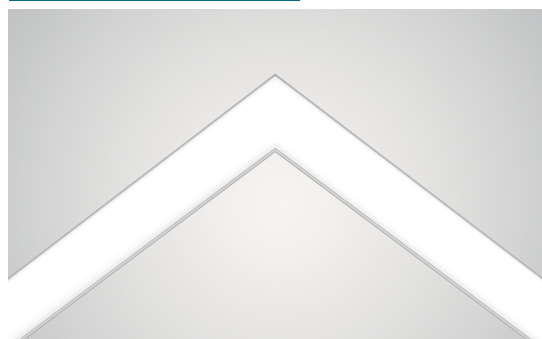

LEV - Leveled corner

## Order Guide

| LUMINAIRE ID  | DISTRIBUTION      | ENVIRONMENT <sup>1</sup>  | OPTIC  | LIGHT SOURCE <sup>3</sup>   | CRI  | LUMEN PACKAGE   |
|---|-------------------|---|--|---|--|---|
| <b>V2SEALRPAT</b>                                     | <b>D</b>          | <b>WET</b>  |  |   |  |   |
| <b>V2SEALRPAT</b><br>- Via 2 Seal<br>Recessed Pattern | <b>D</b> - Direct | <b>WET</b> <sup>2</sup> - Wet Suitable (IP44)<br><br><sup>1</sup> See page 3 for more information.<br><sup>2</sup> Suitable for outdoor environments only when installed under canopy. Not suitable for extreme weather environments. Consult factory for low temperature applications. | <b>EPDO</b> - Environmentally Protected Direct Optic<br><b>ASDO</b> - Asymmetric Soft Direct Optic | <b>SW</b> - Static white<br><b>BIOSST</b> - Static biologically-optimized lighting<br><b>BIOSDY</b> - Dynamic biologically-optimized lighting<br><br><sup>3</sup> Chromawerx Sola and Duo also available. Consult other spec sheet. | <b>80</b> - 80 CRI<br><b>90</b> <sup>4</sup> - 90 CRI<br><br><sup>4</sup> Not available with BIOS. | <b>350</b> - Low output 350 lm/ft<br><b>500</b> - Medium output 500 lm/ft<br><b>750</b> <sup>5</sup> - High output 750 lm/ft<br><br><sup>5</sup> Not available with BIOS. |

## DESCRIPTION

Sealed with silicone gaskets, Via Seal fixtures are intended for wet locations and can be pendant, surface, wall, or recessed mounted. They can act alone as discrete luminaires, or be arranged in continuous lines or patterns. Via 2 Seal is suitable for wet locations where temperatures are moderate and in which spaces are regularly wiped down and frequently in contact with debris and/or moisture. These luminaires can be used to create continuous, unbroken lines of light. See separate spec sheets for other available mountings.

**SENSORS**  
For latest information on sensors, click [here](#).



**IMPORTANT:**  
Fixture must be installed with lens facing down.

IC RATED **IK05**



Up to 99 lm/W performance

| COLOR TEMP.  | PATTERN LENGTH  | CORNER TYPE                 | CORNER DEGREE  | VOLTAGE  | DRIVER <sup>10</sup>   |
|--|---|-----------------------------|--|--|--|
|  |   | <b>LEV</b>                  |  |  |  |
| <b>27</b> <sup>6</sup> - 2700K<br><b>30</b> - 3000K<br><b>35</b> - 3500K<br><b>40</b> - 4000K<br><b>50</b> <sup>6</sup> - 5000K<br><br><sup>6</sup> Not available with BIOS. | <b>#FT#IN</b> <sup>7,8</sup> - Specify nominal length (#) in 1' and/or 1" increments<br><br><b>Standard nominal lengths:</b><br>Continuous runs: lengths over 12'<br><br><sup>7</sup> Minimum 2'.<br><sup>8</sup> With BIOSDY, specify in 2' increments only. | <b>LEV</b> - Leveled corner | <b>90(#)</b> - 90° corner, specify the number of corners (#) | <b>120</b> - 120V<br><b>277</b> - 277V<br><b>UNV</b> - 120V-277V<br><b>347</b> <sup>9</sup> - 347V<br><br><sup>9</sup> Available with D1 only. | <b>D1</b> - 1% 0-10V<br><b>DA</b> <sup>11</sup> - DALI<br><b>LTEA2W</b> <sup>12</sup> - Lutron 1% - 2 wire FP 120V<br><b>LDE1</b> <sup>11</sup> - Lutron Hi-lume 1% Eco<br><b>ELD1</b> - eldoLED 1% ECODrive 0-10V<br><b>ELD0</b> - eldoLED 0.1% SOLOdrive 0-10V<br><b>RLTD10</b> <sup>13</sup> - Low-temperature 10% 0-10V<br><br><sup>10</sup> PoE (Power-over-Ethernet) compatible. Consult factory for details.<br><sup>11</sup> On-site commissioning is required.<br><sup>12</sup> Available with 120V only.<br><sup>13</sup> Remote driver box required. Suitable for temperatures down to -40°C/F. |

| ELECTRICAL  | ELECTRICAL SECTIONS (optional) <sup>18,19</sup>  | POWER FEED                                   | MOUNTING  | FINISH   | OPTIONS  |
|---|--|--|---|--|--|
| <b>1C</b> - 1 circuit<br><b>#MC</b> <sup>14</sup> - Multi circuit<br><b>EC</b> - Emergency-powered fixture<br><b>NL</b> - Night light fixture<br><b>DL</b> - Daylight fixture<br><b>GTD</b> <sup>15,16,17</sup> - Generator transfer device fixture<br><br><sup>14</sup> Specify total number of circuits (#), including any circuits required for electrical section options. Provide drawing or layout specifications. Minimum 4' section per circuit.<br><sup>15</sup> Minimum 4' fixture.<br><sup>16</sup> Not available with 347V.<br><sup>17</sup> Not available for environments where the ambient temperature falls below 0°C (32°F). | <b>#EC##</b> <sup>20</sup> - Emergency-powered section<br><b>#NL##</b> <sup>20</sup> - Night light section<br><b>#DL##</b> <sup>20</sup> - Daylight section<br><b>#GTD##</b> <sup>20,21,22,23</sup> - Generator transfer device section<br><b>#EMB</b> <sup>22,23,24</sup> - Emergency battery<br><b>NA</b> - None<br><br><sup>18</sup> Specify with multi circuit (#MC) electrical option only.<br><sup>19</sup> Provide drawing or layout specifications. Consult factory for other configurations. Default section length is 4'.<br><sup>20</sup> Specify quantity (#), and section length in inches (##).<br><sup>21</sup> Minimum 4' section.<br><sup>22</sup> Not available with 347V.<br><sup>23</sup> Not available for environments where the ambient temperature falls below 0°C (32°F).<br><sup>24</sup> Specify quantity (#). All batteries will be on the same circuit. Each battery powers a 4' section. | <b>TF</b> - Top feed<br><b>EF</b> - End feed | <b>TC9</b> - Tegular 9/16"<br><b>TC15</b> - Tegular 15/16"<br><b>TB9</b> - T-bar 9/16"<br><b>TB15</b> - T-bar 15/16"<br><b>ST</b> - Screw slot T-bar<br><b>DTR</b> - Drywall trim<br><b>DTL</b> - Drywall trimless<br><b>DMF</b> - Drywall mud flange | <b>W</b> - Matte white<br><b>AL</b> - Aluminum<br><b>WA</b> - White antimicrobial Silverwerx<br><b>CF#</b> - Custom finish, specify RAL# | <b>NATA</b> - Natatorium finish<br><b>CRF</b> - Corrosion-resistant finish<br><b>NA</b> - None |

# VIA 2 SEAL

RECESSED PATTERN


DIRECT

STATIC WHITE, BIOS ST/DY


VIA WEATHER SERIES

# LUMENWERX

## Leveled corner

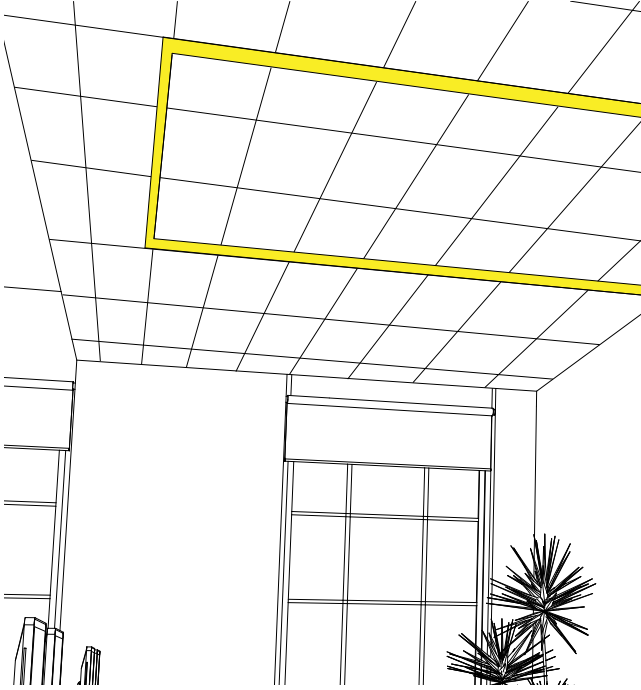

90° Leveled Corner - Grid

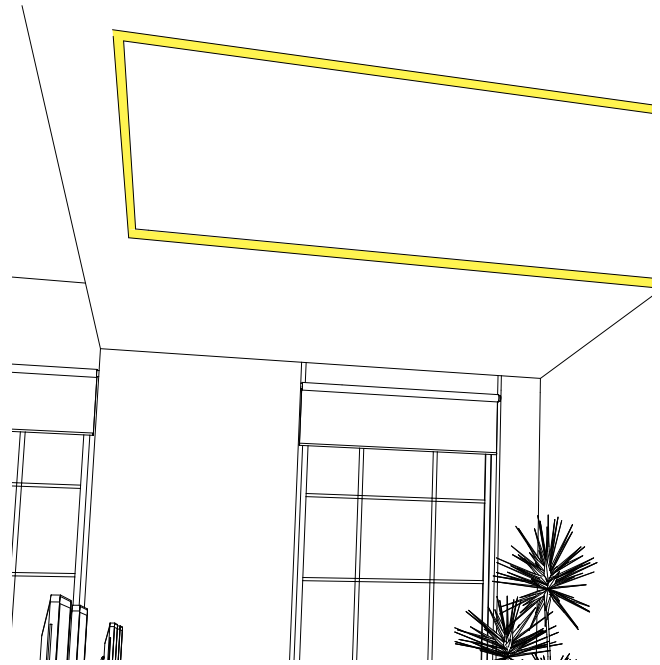

90° Leveled Corner - Drywall

### HOW TO SPECIFY A PATTERN?

Please follow these steps when specifying in order to be as precise as possible.

- (1) We require a drawing illustrating the pattern you are trying to achieve - anything from a simple line drawing to elaborate architectural drawings will suffice.
- (2) Under **PATTERN LENGTH**, enter the overall length of your pattern - either in feet or inches.
- (3) Under **CORNER TYPE**, please enter the type of corner you require.
- (4) Under **CORNER DEGREE**, please enter the angle in degrees, followed by the number of corners.


| PATTERN LENGTH  | CORNER TYPE          | CORNER DEGREE   |
|---|----------------------|---|
|   | LEV                  |   |
| #FT#IN <sup>1,2</sup> - Specify nominal length (#) in 1' and/or 1" increments<br><br>Standard nominal lengths:<br>Continuous runs: lengths over 12'<br><br><sup>1</sup> Minimum 2'.<br><sup>2</sup> With BIOSDY, specify in 2' increments only. | LEV - Leveled corner | 90(#) - 90° corner, specify the number of corners (#) |

# VIA 2 SEAL

RECESSED PATTERN  
DIRECT  
STATIC WHITE, BIOS ST/DY  
VIA WEATHER SERIES

LUMENWERX

## Section Views

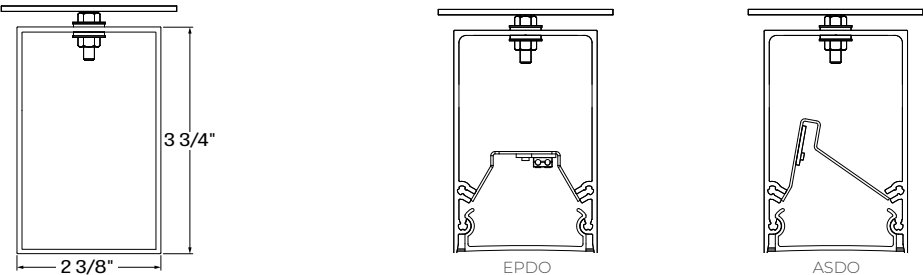

## Environment Options

The Via Weather Series offers four levels of protective sealing: Level 1, Level 2, Level 3, and Level 4. Via 2 Seal is available with one environment option: Wet Suitable (WET) at Level 1. For other levels of protective sealing, please see Via 3 Seal or Via 4 Seal spec sheets for Level 1 and Level 2, Via Wet spec sheets for Level 3, and Via Splash spec sheets for Level 4.

| FEATURES   | <div>LEVEL 1</div> Wet Suitable (IP44) (WET) |
|--|--|
| Indoor application that requires wipe down               | •  |
| Healthcare application                                   | •  |
| Outdoor application with restrictions: under canopy only | •  |
| Continuous line of light over 12 ft                      | •  |
| Water and dust resistant                                 | •  |
| Water and dust protected                                 | X  |
| Not suitable for extreme weather applications            | •  |
| Damp listed  | •  |
| Wet listed   | X  |

# VIA 2 SEAL

RECESSED PATTERN

DIRECT

STATIC WHITE, BIOS ST/DY

VIA WEATHER SERIES

## LUMENWERX


## Photometrics

### MULTIPLIER TABLE

Please follow the multiplier table to ensure correct lumen value. CCT and CRI, will change the lumen output.


#### Multiplier - CCT/CRI

| CCT (K) | WATTS  |        | LPW    |        |
|---------|--------|--------|--------|--------|
|         | CRI 80 | CRI 90 | CRI 80 | CRI 90 |
| 2700    | 1.06   | 1.27   | 0.94   | 0.79   |
| 3000    | 1.02   | 1.23   | 0.98   | 0.81   |
| 3500    | 1.00   | 1.19   | 1.00   | 0.84   |
| 4000    | 1.00   | 1.18   | 1.00   | 0.85   |
| 5000    | 0.95   | 1.12   | 1.05   | 0.89   |



#### EPDO - Delivered Lumens at 40K at 80 CRI

| LUMENS PER FOOT | TOTAL LUMENS PER 4FT | INPUT WATTS | LPW |
|-----------------|----------------------|-------------|-----|
| 350             | 1400                 | 14.1        | 99  |
| 500             | 2000                 | 20.7        | 97  |
| 750             | 3000                 | 32.6        | 92  |



#### ASDO - Delivered Lumens at 40K at 80 CRI

| LUMENS PER FOOT | TOTAL LUMENS PER 4FT | INPUT WATTS | LPW |
|-----------------|----------------------|-------------|-----|
| 350             | 1400                 | 17.0        | 82  |
| 500             | 2000                 | 25.2        | 79  |
| 750             | 3000                 | 40.1        | 75  |

# VIA 2 SEAL

RECESSED PATTERN

DIRECT

STATIC WHITE, BIOS ST/DY

VIA WEATHER SERIES

# LUMENWERX

## Technical Specifications

### OPTICS

#### Environmentally Protected Direct Optic (EPDO)

The Environmentally Protected Direct Optic creates a seal that blocks debris and moisture, and withstands UV distortion and moderate impact. This extruded snap-in lens has a gasket to ensure proper sealing. The lens is 1/16" thick and made of frosted polycarbonate. Internally, white, side kicking reflectors guide the light through the lens. The EPDO suits moderate climate environments.

#### Asymmetric Soft Direct Optic (ASDO)

The Asymmetric Soft Direct Optic creates a seal that blocks debris and moisture, and withstands UV distortion and moderate impact. This extruded snap-in lens has a gasket to ensure proper sealing. The lens is 1/16" thick and made of frosted polycarbonate. Internally, white, side kicking reflectors specifically angled to guide the light through the lens to create a nice asymmetric distribution. The ASDO suits moderate climate environments.


### LIGHT SOURCE

Custom linear array of mid-flux LEDs are cartridge-mounted with quick-connect wiring to facilitate service and thermal management. Available in 2700K, 3000K, 3500K, 4000K and 5000K with a minimum 80 CRI and an option for 90 CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. LEDs operated at reduced drive current to optimize efficacy and lumen maintenance.

All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.



BIOS SkyBlue™ Technology is designed to provide the specific circadian stimulus to improve overall sleep quality, recovery during the night, and overall feelings of well-being. The non-visual light signals that stimulate our circadian system have peak intensity in the "sky blue" region. As the diagram below illustrates, BIOS SkyBlue technology shifts the peak LED spectral intensity (490 nm) to align better with the peak response of circadian stimulus. Also note the enhanced deep-red (near 660 nm) spectrum.

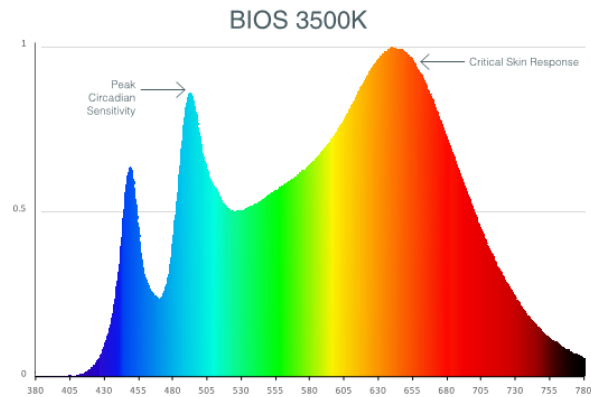

**WELL for Light** - The WELL building standard focuses on light quality in several features. There are three categories that are fully attributed to the construction and features of a luminaire. In WELL V1, it's Feature 54 Circadian Lighting, Feature 55 Glare Control, and Feature 58 Color Quality. In WELL V2, it's Feature L03 Circadian Lighting, Feature L04 Glare Control, and Feature L07 Electric Light Quality.

This fixture meets Features:

- Feature 54 or L03 when BIOS LED is selected
- Feature 58 or L07 when 90 CRI is selected

All LED drivers used at Lumenwerx are deemed to have a low risk level of flicker, of 5 % or less below 90Hz operational as defined by IEEE standard 1789-2015 LED.



**WELL for Mind** - This luminaire meets WELL for mind as it is a human centric luminaire offering quality light, excellent color, and smooth optics. If any of these features are incorporated in a luminaire, it can improve the ability to focus, concentrate, and persist longer on a given task. This fixture harmoniously operates in a space to assist the mind.

**For more information, please contact [well@lumenwerx.com](mailto:well@lumenwerx.com)**

# VIA 2 SEAL

RECESSED PATTERN  
DIRECT

STATIC WHITE, BIOS ST/DY  
**VIA WEATHER SERIES**


## PATTERN LENGTH

Via 2 Seal can be ordered in 1' and/or 1" increments. Continuous runs are available for run lengths over 12'. The minimum length is 2'. All individual sections are joined together onsite using the joiner kits provided. Lumenwerx joiner kits are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.

## JOINING SYSTEM

All individual sections are joined together onsite using the ¼"-20 screws and nuts provided. The junction between two adjacent sections creates a continuous line of light without shadows.

### Wet Suitable - WET

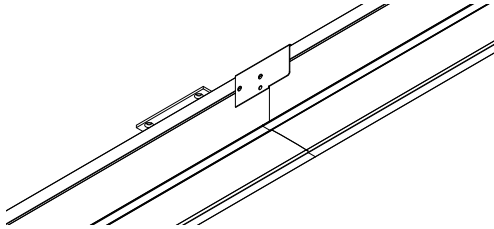

Continuous line of light

## LUMINAIRE MAINTENANCE

LED arrays and drivers are accessible through the optical chamber and easily replaced.

## ELECTRICAL

Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency>84%, PF>0.9, THD<20%. Other specifiable options include Lutron Hi-Lume 1% (specify 2-wire, or Ecosystem Dim-to-Off), eldoLED 1% ECOdrive 0-10V, eldoLED 0.1% SOLOdrive 0-10V, and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant. An optional low-temperature 10% 0-10V driver, suitable for temperatures down to -40°C/F is also available.

## PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, Duo (tunable white), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

# LUMENWERX

## ELECTRICAL SECTION OPTIONS

Electrical section options are available for fixtures specified as multi circuit (#MC). With MC, specify the total number of circuits (#), including any circuits required for optional electrical sections. A drawing is required to specify the layout. Please consult factory for custom configurations.

### Electrical sections

Options include emergency-powered light (#EC##), night light (#NL##), daylight (#DL##), and generator transfer device (#GTD##) sections. Specify the quantity (#), as well as the section length in inches (##).

Example 1: A 32' Direct fixture with two 8' emergency light sections on a second circuit.

Code: 2MC-2EC96

Example 2: A 24' Direct fixture with one 4' generator transfer device section.

Code: 1MC-1GTD48

### Battery

Each emergency battery (#EMB) powers a 4' section. All batteries will be on the same circuit. Specify the number of batteries (#) required.

Factory installed long life, high temperature, maintenance-free Lithium-Ion battery pack with self-test functionality, test switch and charge indicator. Minimum of 90 minutes operation, up to 1000 lumens per 4' (25°C) emergency lighting output and recharge time of 24 hours. Suited for ambient temperatures of 0°C (32°F) to 55°C (131°F).

### Generator Transfer Device (GTD)

A UL924 listed shunt relay that can bypass both line voltage (120-277V) and 0-10V dimming signal. Suited for ambient temperatures of 0°C (32°F) to 60°C (140°F).

# VIA 2 SEAL

## RECESSED PATTERN


### DIRECT

STATIC WHITE, BIOS ST/DY


#### VIA WEATHER SERIES

#### MOUNTING OPTIONS


Recessed mount into exposed or concealed T-bar or regular ceiling.




TG9 - Tegular 9/16"




TG15 - Tegular 15/16"



TB9 - T-bar 9/16"




TB15 - T-bar 15/16"




ST - Screw slot T-bar


Recessed mount in drywall ceilings with trim, trimless, or mud flange options.



DTR - Drywall trim



DTL - Drywall trimless



DMF - Drywall mud flange

# LUMENWERX

#### FINISH

**Interior** - 95%, reflective matte powder coated white paint

**Exterior** - Powder-coat paint in matte white or aluminum.

Custom finishes are also available. Optional antimicrobial finish.

#### CONSTRUCTION

**Housing** - Extruded aluminum (0.095" nominal) up to 90% recycled content

**Interior brackets** - Die-formed cold rolled sheet steel 18 gauge thick

**Reflectors** - Cold rolled steel 0.024" thick precisely die-formed, 95% reflective matte white painted

**Recessed flanges** - Extruded aluminum (0.060" nominal) up to 90% recycled content

**Mud flange** - Extruded aluminum (0.060" nominal) up to 90% recycled content

**End cap** - Die-cast aluminum (0.100" nominal)

**End cap gasket** - 1/16" closed-cell silicone foam

**Mounting bracket** - 1/8" thick aluminum, stainless steel PEM stud, and steel and neoprene sealing washer

#### CERTIFICATIONS

**ETL** - WET environment option is rated for dry/damp locations.

Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

**IC rated** - Suitable for direct contact with insulation.

**IK05** - Impact resistance rated to IK05.

#### WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.