

# VIA 3 - PATTERNS


SURFACE - WALL



**LUMENWERX**  
WWW.LUMENWERX.COM

## CHROMAWERX TUNABLE WHITE AND DIM TO WARM

**IMPORTANT: a qualified DMX integration consultant is required to ensure proper installation and function of any DMX network**

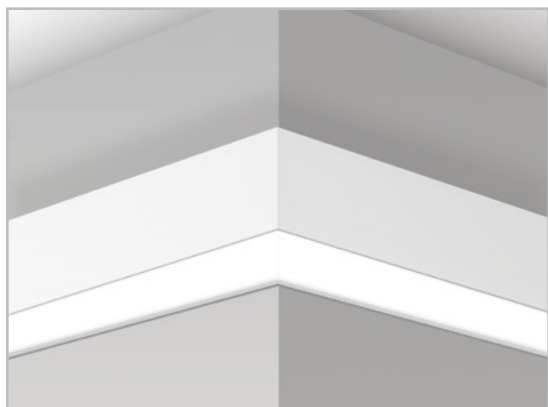

LEV - leveled corner

### DESCRIPTION

At LumenWerx, we make it simple to design patterns customized for you. Whether surface, wall mount, pendant or recessed - or even a combination of different mounting types, we make it easy to achieve the results you're looking for. While our standard is a 90° corner, we can customize angles to suit your needs. Efficient and flexible, the Via 3 features numerous optical configurations including flush and drop diffusers. Via 3 is an ideal vehicle for ChromaWerx white tuning in education, office, and healthcare applications where modular luminaires are used.

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

NOTES: \_\_\_\_\_



### ORDER GUIDE

**up to 106 lm/w performance**

| VIA3SWDPAT                                      | HLO                                    |  | LED                        |                          |  |  |
|---|--|--|----------------------------|--------------------------|--|--|
| LUMINAIRE ID                                    | OPTICS                                 | LENS POSITION                                      | LIGHT SOURCE               | CRI                      | LUMEN PACKAGES   | CHROMAWERX   |
| VIA3SWDPAT - via 3" surface wall direct pattern | HLO - High-Efficiency Lambertian Optic | FH - Flush<br>0.5D - 0.5" drop<br>1.0D - 1.0" drop | LED - high performance LED | 80 - 80CRI<br>90 - 90CRI | 500 - min. low output 500lm/ft<br>750 - medium output 750lm/ft<br>1000 - max. high output 1000lm/ft<br>#### - other required lm/ft | DUO - tunable white 2 channel control 27k to 65k<br>SOLA - dim to warm single channel control 22k to 35k |

| PATTERN LENGTH   | CORNER TYPE                                | CORNERS DEGREE                       | VOLTAGE                  | DRIVER   | ELECTRICAL         |
|--|--|--------------------------------------|--------------------------|--|--------------------|
| #FT - nominal length in feet<br>(2' increments only)<br>Continuous Run - for luminaires over 12' | INN - inner corner<br>LEV - leveled corner | 90 - 90 degrees<br># - other degrees | 120 - 120V<br>277 - 277V | DMX - to specify see pages 6 to 11<br>DA - Dali (duo only) local on-site commissioning is required<br>0-10 - Single 0-10V input (Sola) or dual 0-10V input for CCT/Intensity (Duo)<br>PSQO - Lutron T-Series 1% Tunable White (Duo only) | 1<br>1 - 1 circuit |


| MOUNTING CEILING   | MOUNTING WALL   | FINISH  | OPTIONS                  |
|--|---|---|--------------------------|
| GRD - grid ceiling<br>DRC - drywall ceiling<br>NA - not applicable | DRM - drywall mounting<br>DMB - drywall mounting bracket<br>NA - not applicable | W - matte white<br>AL - aluminum<br>B - matte black<br>CF# - custom finish specify RAL# | FU - fuse<br>CU - custom |

### DMX WALL CONTROLS

To specify see pages 6 to 11


See page 2 for ordering code detailed information

### SIDE VIEW - MOUNTING CEILING




VIA3SWDPAT - surface

### SIDE VIEW - MOUNTING WALL



VIA3SWDPAT - Wall DMB

### TOP VIEW - MOUNTING WALL (NO BRACKET)



VIA3SWDPAT - Wall DRM

File Name: VIA3-TW-PAT-SURFACE-WALL-SPEC

Page: 1 / 11


September 22, 2019

www.lumenwerx.com (T) 514-225-4304 (F) 514-931-4862 © All rights are reserved to LumenWerx ULC.  
LumenWerx ULC. reserves the right to change or modify product specifications without notification



## CHROMAWERX TUNABLE WHITE AND DIM TO WARM

## LEVELED CORNERS

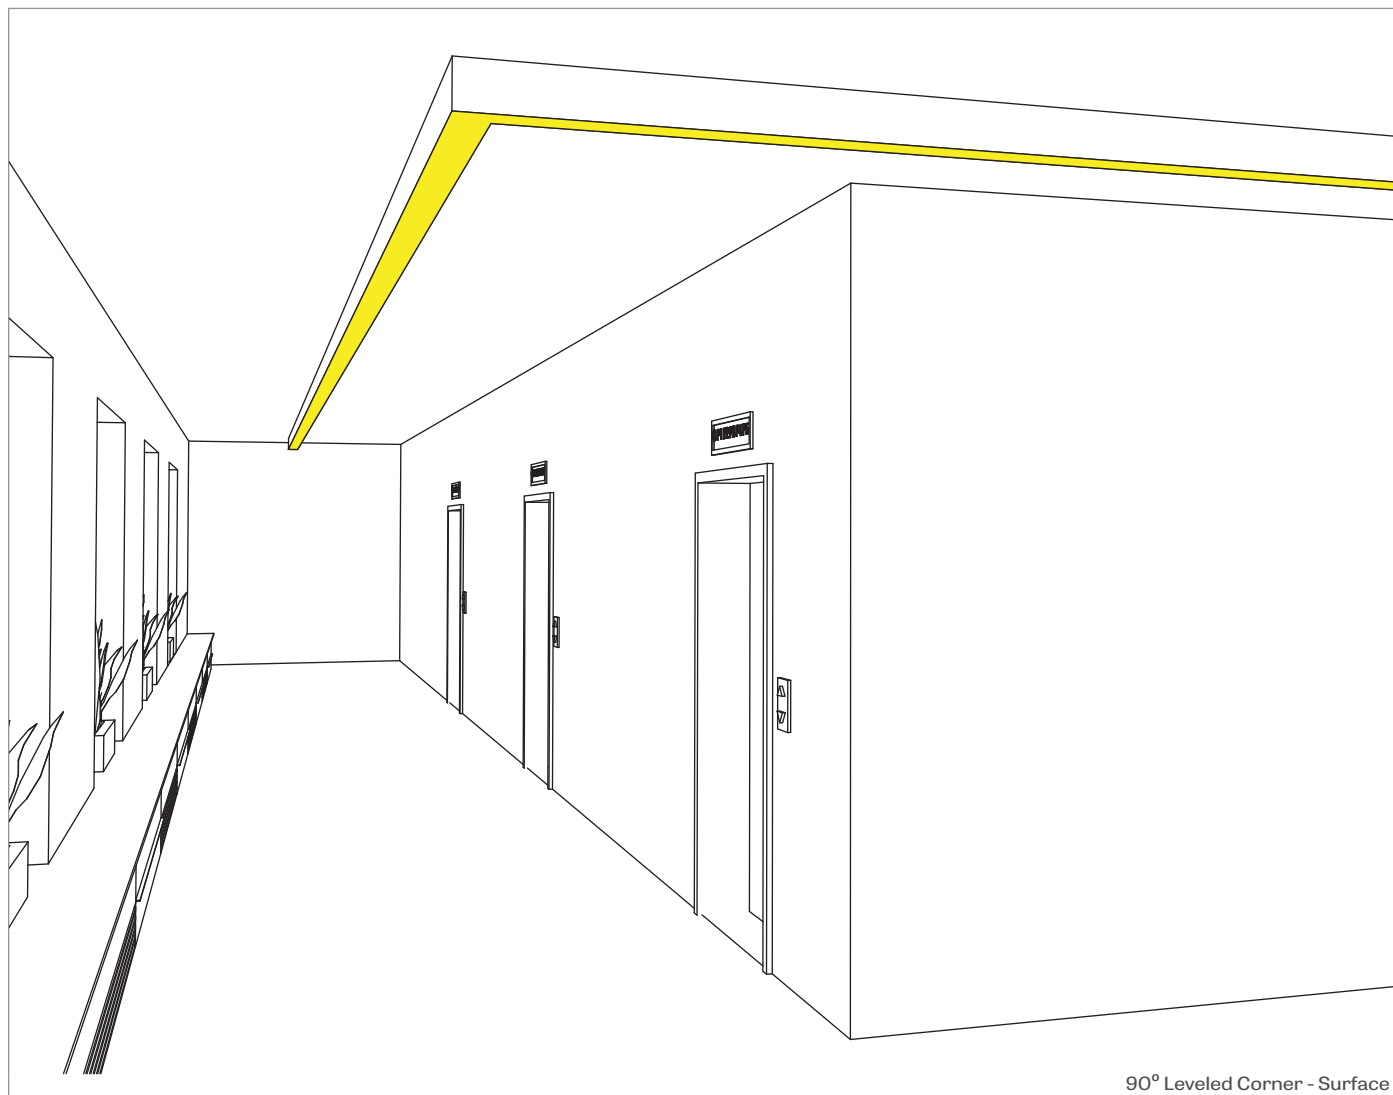

90° Leveled Corner - Surface

## HOW TO SPECIFY A PATTERN?

Please follow these steps when specifying in order to be as precise as possible.


- (1) We require a drawing illustrating the pattern you are trying to achieve - anything from a simple line drawing to elaborate architectural drawings will suffice.
- (2) Under **PATTERN LENGTH**, enter the overall length of your pattern - either in feet or inches.
- (3) Under **CORNER TYPE**, please enter the type (or types) of corner you require. If more than one type of corner is required, please separate types with a plus (+).
- (4) Under **CORNERS DEGREE**, please enter the angle in degrees of each corner required to complete your pattern (for example 90+90+90).

| PATTERN LENGTH   | CORNER TYPE                                | CORNERS DEGREE                       |
|--|--|--------------------------------------|
| #FT - nominal length in feet<br>(2' increments only)<br>Continuous Run - for luminaires over 12' | INN - inner corner<br>LEV - leveled corner | 90 - 90 degrees<br># - other degrees |


## CHROMAWERX TUNABLE WHITE AND DIM TO WARM

## PHOTOMETRICS


Please follow the multiplier tables to ensure correct lumen value. Lensing, CCT and CRI, will change the lumen output.



HLO-FH



HLO-0.5D



HLO-1.0D

## HLO-FH Delivered Lumens for Flush at 35K 80CRI

| Lumens per Foot | Total Lumens Per 4FT | Input Watts | LPW |
|-----------------|----------------------|-------------|-----|
| 500             | 2000                 | 19          | 106 |
| 750             | 3000                 | 28.5        | 106 |
| 1000            | 4000                 | 38          | 106 |

## Multiplier - Drop Lens

| Direct lens    | Watts Multiplier | LPW Multiplier |
|----------------|------------------|----------------|
| Flush lens     | 1.00             | 1.00           |
| Drop lens 0.5" | 0.98             | 1.02           |
| Drop lens 1.0" | 0.96             | 1.04           |

## Multiplier - CCT/CRI

| CCT (K) | Watts Multiplier |       | LPW Multiplier |       |
|---------|------------------|-------|----------------|-------|
|         | CRI80            | CRI90 | CRI80          | CRI90 |
| 2700    | 1.05             | 1.26  | 0.95           | 0.79  |
| 3000    | 1.01             | 1.23  | 0.99           | 0.81  |
| 3500    | 1.00             | 1.20  | 1.00           | 0.84  |
| 4000    | 1.00             | 1.17  | 1.00           | 0.85  |
| 5000    | 0.90             | 1.09  | 1.11           | 0.92  |
| 6500    | 0.94             | 1.11  | 1.06           | 0.90  |

## OPTICS

**High Efficiency Lambertian Optic (HLO)** shielding of diffusing 0.075" thick acrylic provides up to 88% transmission and good source obscuration. Matte white reflectors distribute LED output across the shielding. Luminaire brightness is controlled by the ratio of luminous flux to shielding area. HLO is available as a flush diffuser or as a drop diffuser, extending 0.5" or 1.0" below the luminaire housing. Drop diffusers are extruded with glued end caps. HLO optics have a Spacing Criteria of 1.10.

## LIGHT SOURCE - LED


Custom linear array of alternating color temperature mid-flux LED's are mounted directly to the housing for optimal thermal performance. For the Duo products, a color temperature range from 2700K-6500K is achievable with color points on or below the black body curve. For the Sola products, a color temperature range from 2200K-3500K is controlled synchronously with intensity. Color consistency between fixtures is maintained to within 3SDCM. LEDs are operated at reduced drive current to optimize efficacy and lumen maintenance. All LED's have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

### CHROMAWERX TUNABLE WHITE AND DIM TO WARM

#### PATTERN LENGTH


All individual sections are joined together onsite using the joiner kits provided. LumenWerx offers joiner kits that are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.

#### Joining system

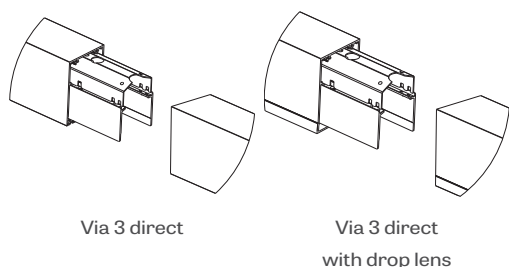

#### CHROMAWERX - TUNABLE WHITE

##### ANSI C78.377-2015

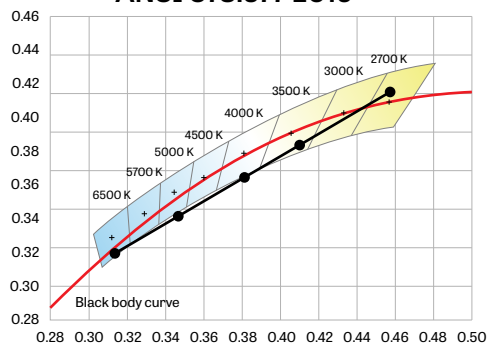

**ChromaWerx Sola** is single-channel control that dims output while warming the color temperature in a pre-determined relationship. A simple digital or analog control sends a common signal to dual output digital drivers, which are programmed to adjust a specially populated LED array to emulate the effect of dimming a filament source. Dimming range is programmable but the default option runs from 3500K at 100% of full power to 2200K at 5% of full power. CRI is maintained above 80 throughout the dimming range.

**ChromaWerx Duo** is two-channel control. It uses an analog (0-10V) protocol for separate control of luminaire CCT and intensity or a digital (DMX, DALI) protocol for synchronous control of both warm and cool LED arrays to enable the user to set color temperature and light output. Commonly called "tunable white", ChromaWerx two-channel control provides the range of warm (2700K) to cool (6500K) color that can be useful for helping to entrain circadian rhythms, stimulate alertness for improved educational and work productivity, and compensate for jet lag, among other applications. The ChromaWerx drivers are programmed to limit maximum light output and power usage across all color temperatures. CRI is maintained above 80.

#### ELECTRICAL

##### DMX (Duo only)

Factory-Set adjustable output current electronic driver with 120-277V AC line input. Using DMX wall controls (optionally supplied by Lumenwerx) or an existing DMX control system, both channels of LEDs are independently adjustable. Each DMX driver can be independently addressed using the built-in RDM (Remote Device Management) in the field. Dimming down to 1% is attainable. Rated life (90% survivorship) of 50,000 hours at 50°C maximum ambient temperature. At maximum driver load, efficiency < 84%, PF > 0.9, THD < 20%.

##### Dali (Duo Only)

Factory-Set adjustable output current electronic driver with 120-277V AC line input. Using an existing DALI control system (supplied by others), one control channel adjusts the fixture color temperature, and the other control channel adjusts fixture brightness. Dimming down to 1% is attainable. Rated life (90% survivorship) of 50,000 hours at 50°C maximum ambient temperature. At maximum driver load, efficiency < 84%, PF > 0.9, THD < 20%.

##### 0-10V (Sola)

Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Using a single 0-10V control signal, the light output warms in color temperature as it dims down to 1% and 2200K. At maximum driver load, efficiency < 86%, PF > 0.9, THD < 20%.

##### 0-10V (Duo)

Factory-set adjustable output current LED driver with universal (120-277VAC) input. Controlled via two individual 0-10V signals, one for setting light output down to a minimum of 1% and the other for adjusting the CCT (default range of 2700K-6500K). Rated life of 50,000 hours at 70°C maximum driver case temperature and 100% load conditions. Typical efficiency of 86%, PF > 0.9, THD < 20% at 100% load conditions.

##### PSQ0 (Duo only)

Lutron T-Series 2-Channel tunable white drivers enable high-performance human centric lighting (HCL) applications. Digital control of color temperature (CCT) and intensity are achieved when used with the ESN T-Series tunable white controller as a part of a Lutron Quantum System.

**CHROMAWERX TUNABLE WHITE AND DIM TO WARM****MOUNTING OPTIONS****Mounting Wall**

Fixtures may be horizontally mounted to the wall directly or using a bracket. For long runs, a minimum of 6" from adjacent walls is required.

**Mounting Ceiling**

Fixtures can be mounted directly to T-Bar, drywall and hard surface ceilings, hardware supplied by others. Long runs require a minimum of 6" distance from the vertical wall.

**FINISH**

**Interior** - 95%, reflective matte powder coated white paint

**Exterior** - matte white, matte black or aluminum powder coating.

Custom finishes are also available.

**CONSTRUCTION**

**Housing** - Extruded Aluminum (0.095" nominal) up to 90% Recycled Content

**Interior brackets** - Die formed cold rolled sheet steel 18 gauge thick

**Joining system** - Die cast Zinc (0.95" nominal)

**Reflectors** - Cold rolled steel 0.024" thick precisely die formed, 95% reflective matte white painted

**End caps** - Die cast Aluminum (0.95" nominal)

**CERTIFICATIONS**

**ETL** - Rated for Indoor Dry/Damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

**WARRANTY**

LumenWerx provides a five-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. LumenWerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.

# VIA 3 - PATTERNS

SURFACE - WALL

**LUMENWERX**  
WWW.LUMENWERX.COM

## CHROMAWERX TUNABLE WHITE

### DUO DMX SPECIFICATION

A qualified DMX integrator is required to assure proper installation and commissioning of the DMX network. **When placing the PO, please provide the contact information of your DMX integrator.**

Please answer the following questions to help us identify your DMX network requirements.

YES

Do you require a wall controller provided by Lumenwerx?

NO

DMX control system supplied by others. Lumenwerx will supply DMX-enabled fixtures with default DMX addressing. See following pages for technical DMX informations. ✓

DMX controller supplied by Lumenwerx

#### How many zones do you have?

A zone consists of one or more luminaires behaving identically.



1 Zone



2 Zones

#### How to calculate the required number of drivers:

per 4' fixture

Driver

1x driver

Direct only

per 4' fixture

Driver

2x driver

Direct high output

To Calculate  
# of drivers

1 - 4 Zones

5 or more Zones

Do you have more than  
32 drivers in total?

NO

YES

Order a standard Lumenwerx wall controller.

#### WALL CONTROLLER

**WCW** - wall controller white

**WCB** - wall controller black

Add the control code at the end of your order code.

Please provide a fixture layout or RCP (Reflected Ceiling Plan) showing the locations of the DMX fixtures, zones and the DMX wall controller.


Refer to your DMX integrator for the installation. ✓

Subject to factory evaluation. Please contact our controls specialist at [controls@lumenwerx.com](mailto:controls@lumenwerx.com). Additional cost and equipment will be required. ✓

Subject to factory evaluation and approval. Please contact our controls specialist at [controls@lumenwerx.com](mailto:controls@lumenwerx.com). Additional cost and equipment will be required. ✓

## CHROMAWERX TUNABLE WHITE

### GENERIC DMX NETWORK ARCHITECTURE

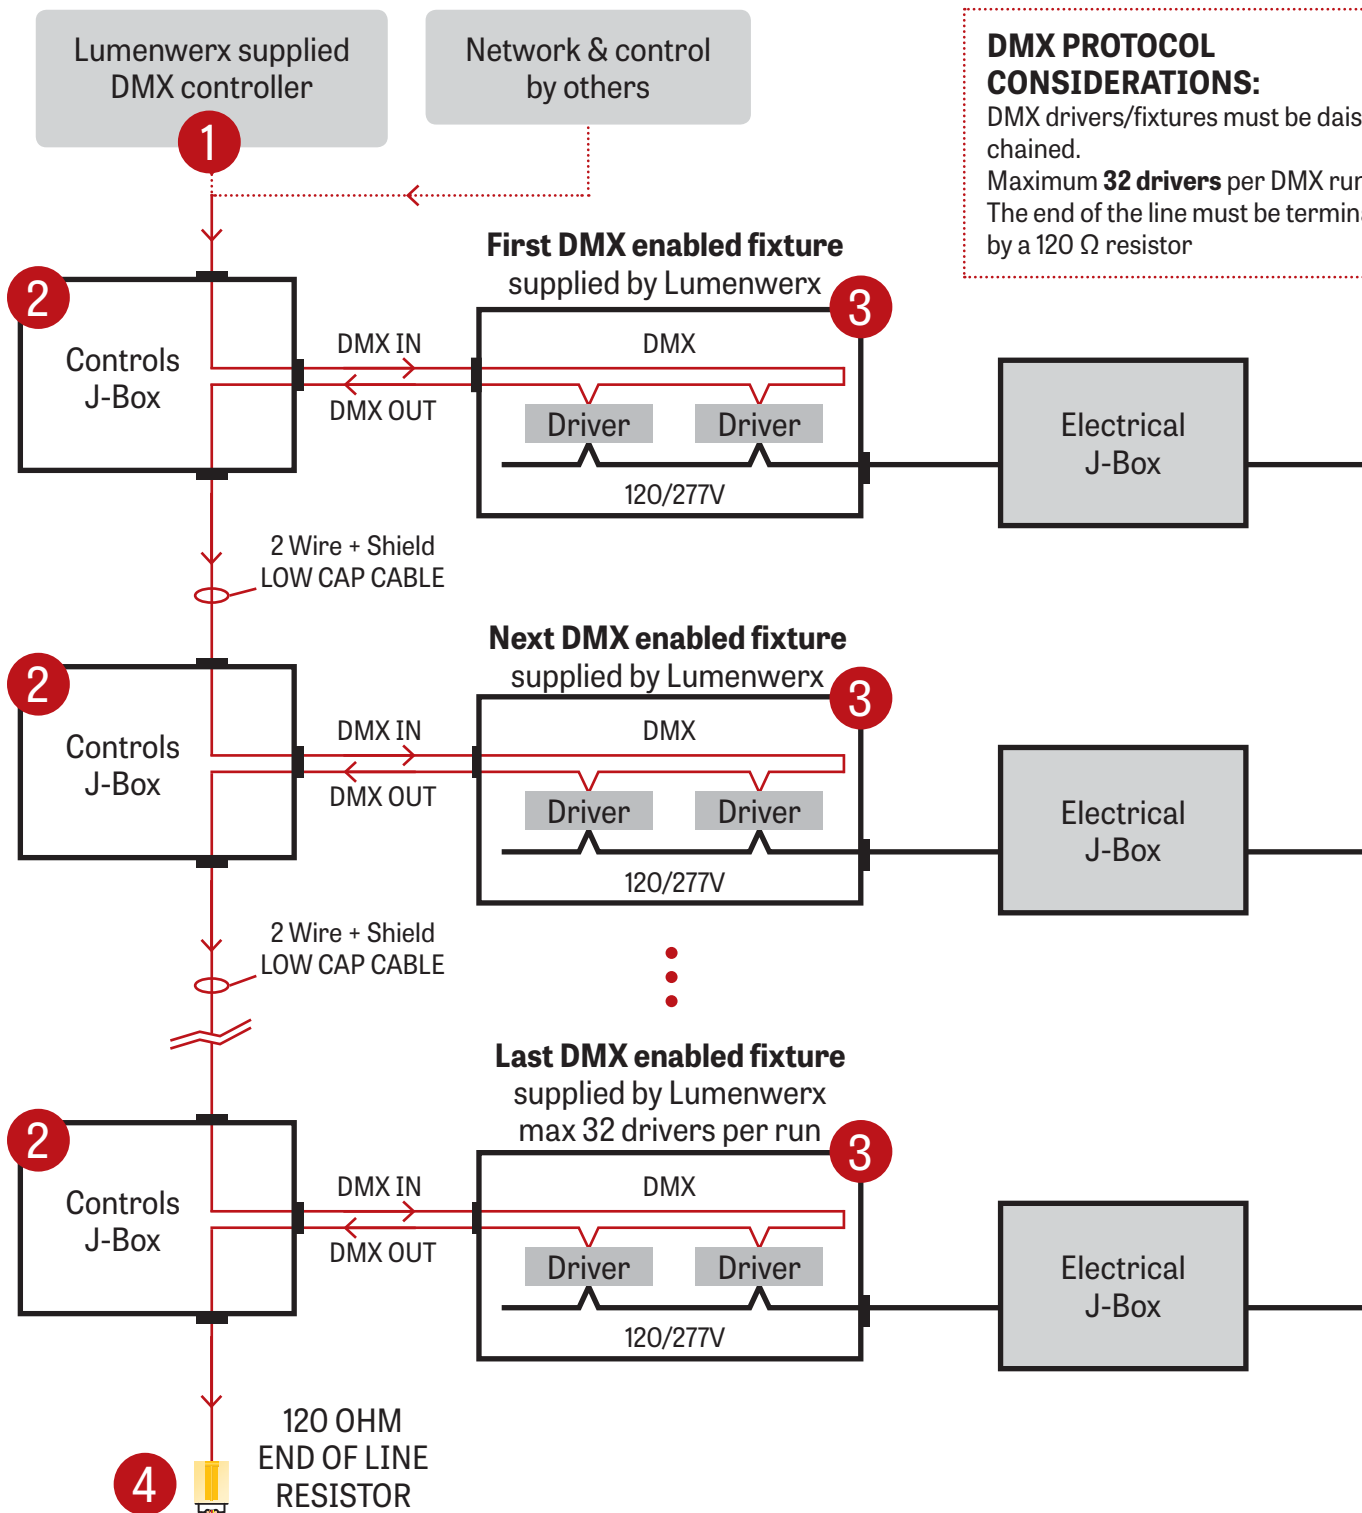

# VIA 3 - PATTERNS

SURFACE - WALL


**LUMENWERX**  
WWW.LUMENWERX.COM

## CHROMAWERX TUNABLE WHITE

### 1 LUMENWERX SUPPLIED DMX CONTROLLER

To the first fixture

WALL BOX SUPPLIED BY OTHERS

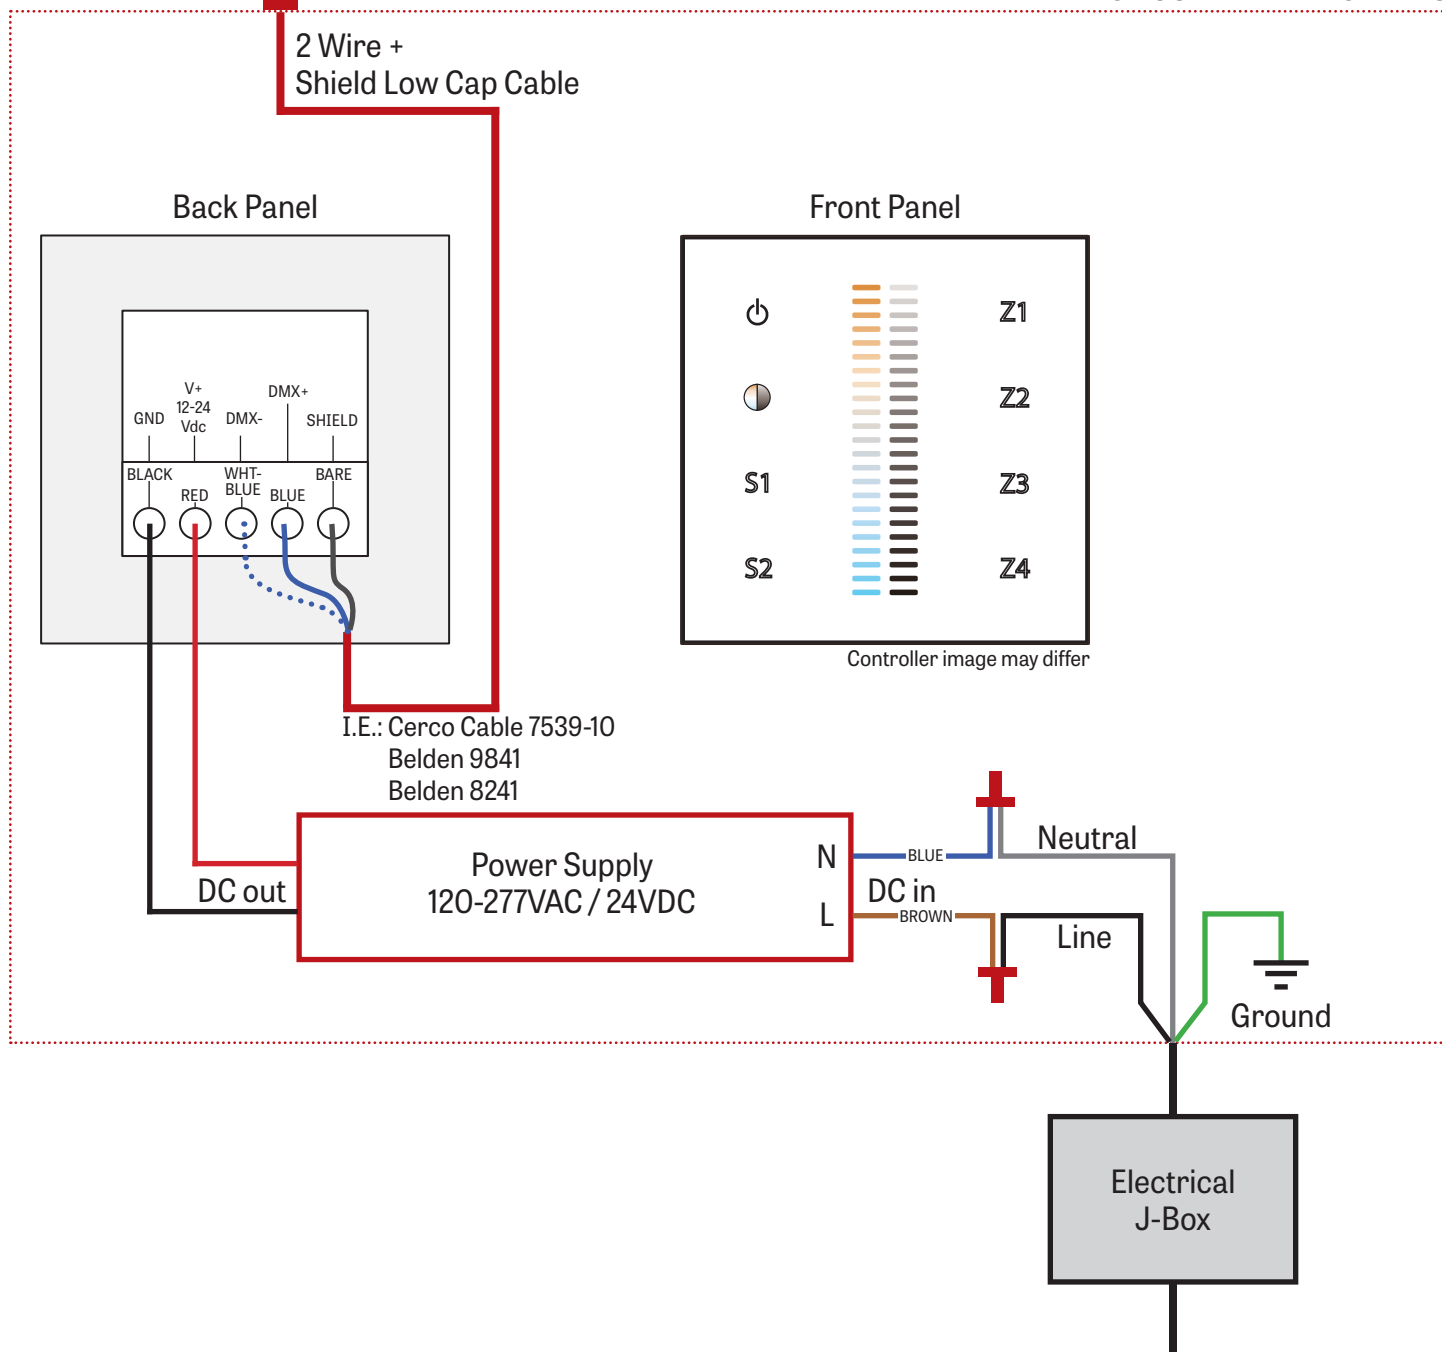

# VIA 3 - PATTERNS


SURFACE - WALL

LUMENWERX  
WWW.LUMENWERX.COM

## CHROMAWERX TUNABLE WHITE


### 2 J-BOX DMX DAISY CHAIN DETAIL

Low capacitance DMX Cable from Previous Fixture

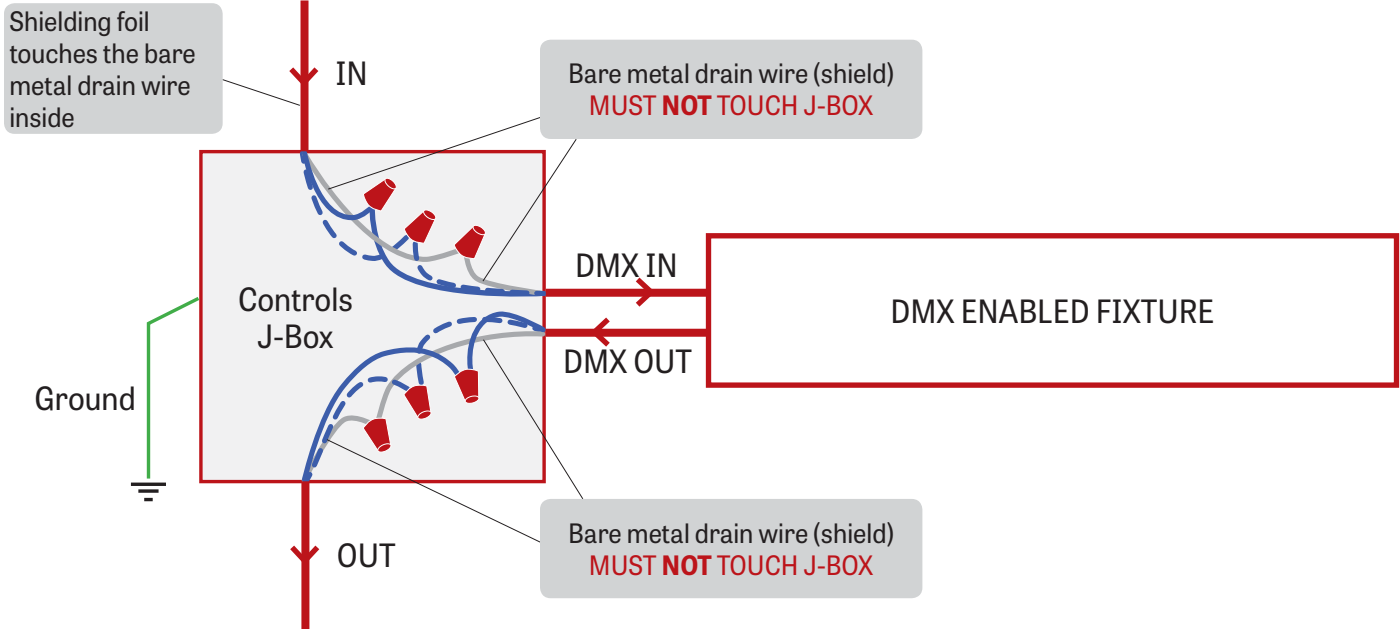

Low capacitance DMX cable to next fixture

### 3 DMX CONNECTION RECESSED & SURFACE

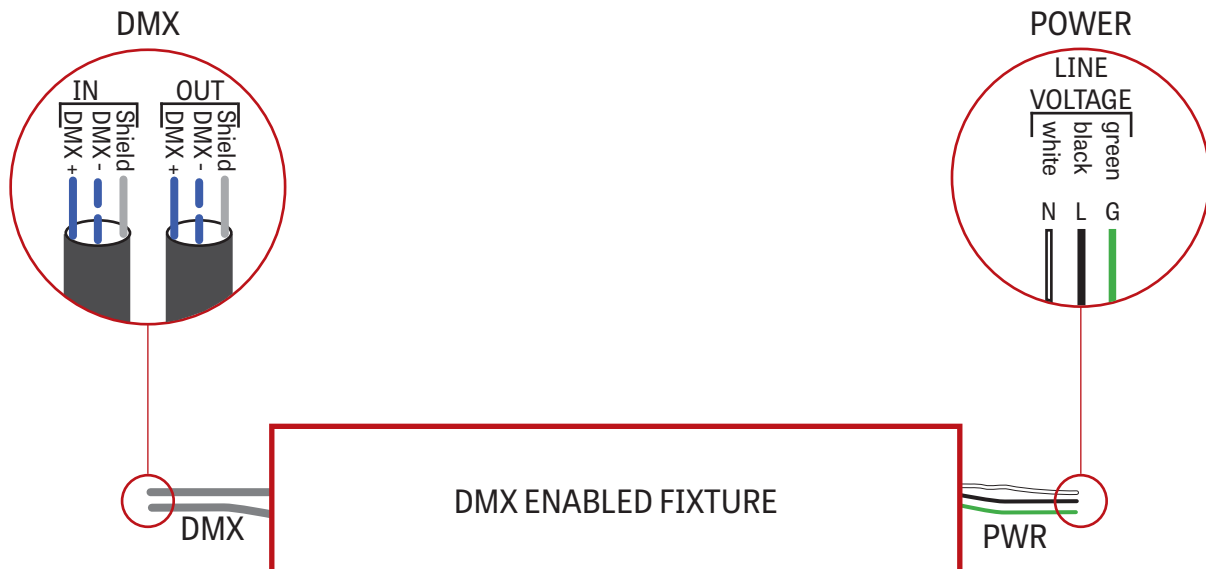


## VIA 3 - PATTERNS

SURFACE - WALL

**LUMENWERX**  
WWW.LUMENWERX.COM

## CHROMAWERX TUNABLE WHITE


#### 4 DMX LAST FIXTURE DETAIL

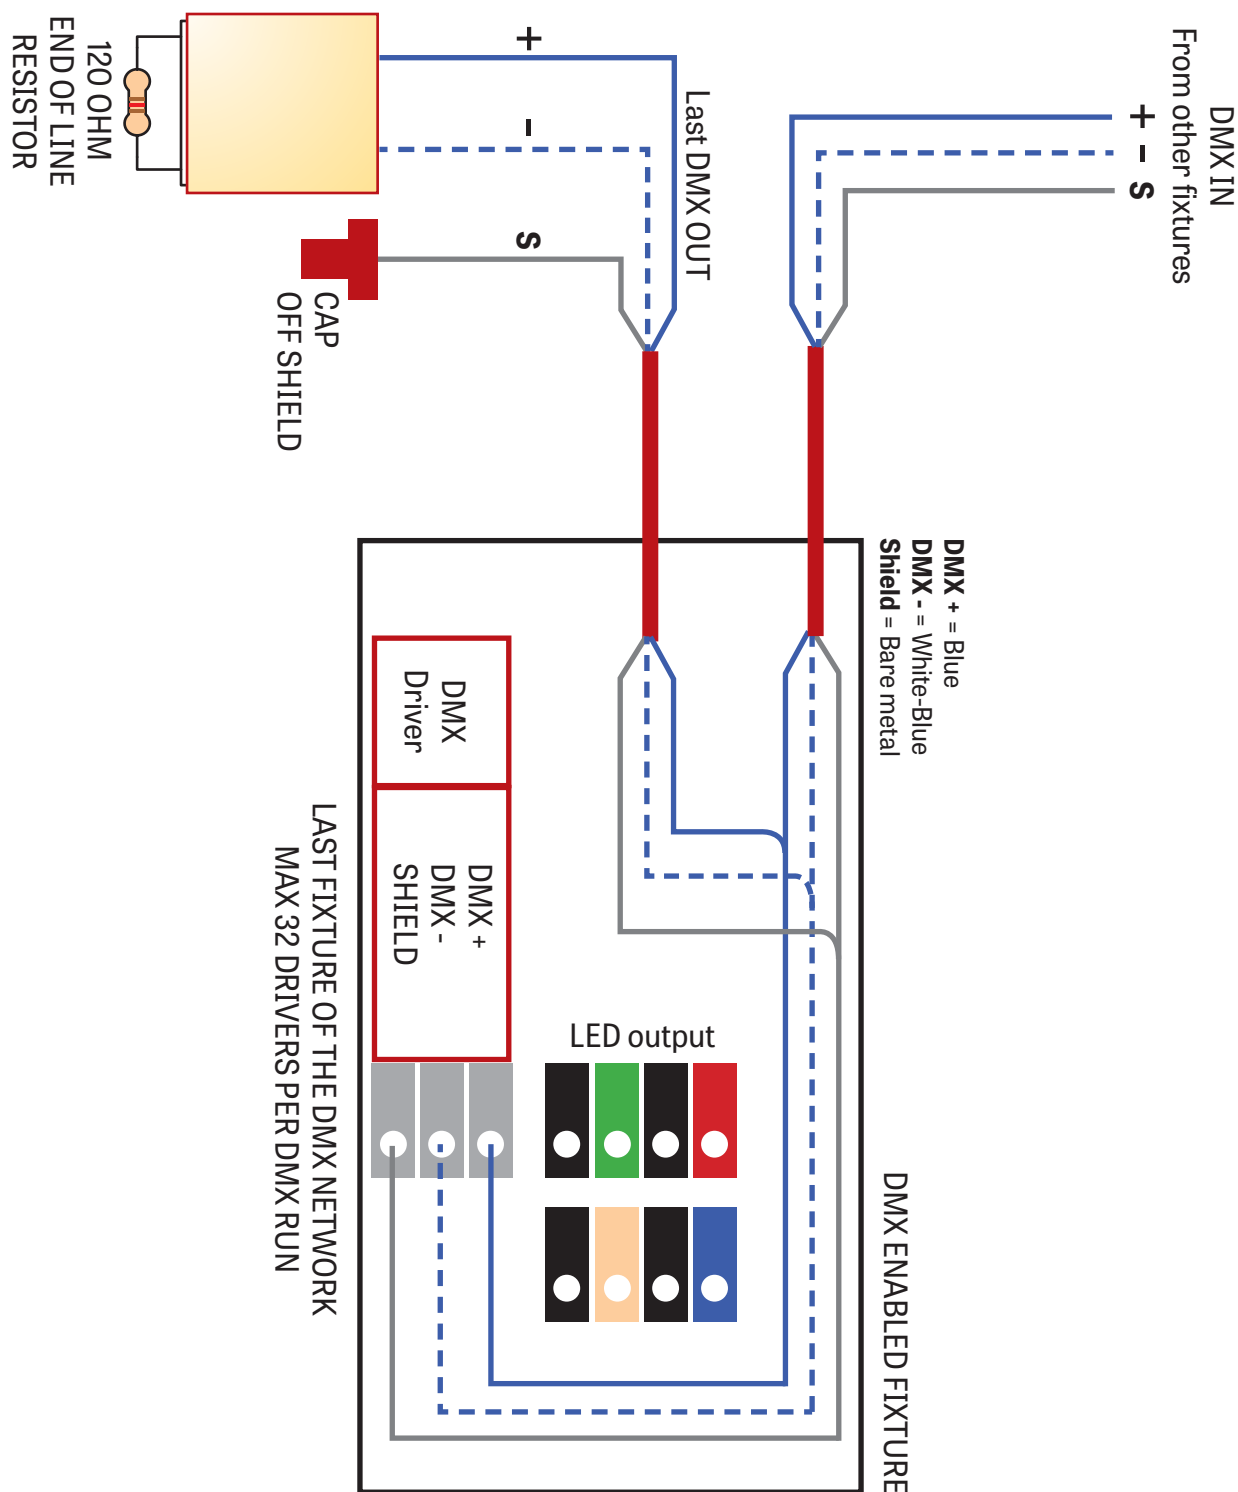

## CHROMAWERX TUNABLE WHITE

## DMX WALL CONTROLLER

## DUO 1-4 ZONE

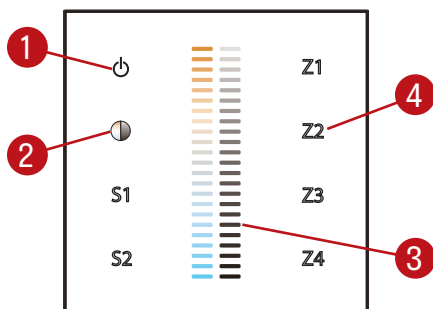

(1) Power:

Use this button to turn ON or OFF the fixture

(2) Brightness/CCT:

Use the color/brightness toggle button to chose between color/brightness. when Blue: brightness is selected, when Yellow: color is selected.

(3) Slider:

Depending on the mode chosen in 2, the slider will allow the user to set desired color or brightness.

(4) Zone select:

Up to 4 zones can be selected either independently or together. Once selected the commands will be sent to the zone identified by a Blue LED.

## Default DMX Addresses:

1 Warm

2 Cool