

# VIA 4 SEAL

PENDANT

DIRECT, DIRECT/INDIRECT

CHROMAWERX - SOLA AND DUO

VIA WEATHER SERIES



Project: \_\_\_\_\_

Type: \_\_\_\_\_

# LUMENWERX



## DESCRIPTION

Sealed with silicone gaskets, Via Seal fixtures are intended for wet locations and can be pendant, surface, wall, or recessed mounted. They can act alone as discrete luminaires, or be arranged in continuous lines or patterns. Via 4 Seal is suitable for wet locations where temperatures are moderate and in which spaces are regularly wiped down and frequently in contact with debris and/or moisture. The fixture can be used to create continuous, unbroken lines of light. Via 4 Seal is also offered as Wet Listed certified by ETL (Electrical Testing Laboratories), in which case, it is able to withstand smaller particles of debris and light water infiltration. Via 4 Seal Wet Listed can also be used to create continuous lines of light, but with subtle breaks at 12-foot increments. See separate spec sheets for patterns and other available mountings.

**IMPORTANT:**  
Fixture must be installed with direct lens facing down.

**IK05**



## Order Guide

LUMINAIRE ID	DISTRIBUTION	ENVIRONMENT <sup>2</sup>	DIRECT OPTIC	INDIRECT OPTIC Specify NA for Direct fixture	LIGHT SOURCE <sup>5</sup>
<b>V4SEALP</b>					
<b>V4SEALP</b> - Via 4" Seal Pendant	<b>D</b> - Direct <b>DI</b> <sup>1</sup> - Direct/Indirect	<b>WET</b> <sup>3</sup> - Wet Suitable (IP44) <b>WETL</b> <sup>3,4</sup> - Wet Listed (IP54)  <sup>2</sup> See page 4 for more information on each environment option. <sup>3</sup> Suitable for outdoor environments only when installed under canopy. Not suitable for extreme weather environments. Consult factory for low temperature applications. <sup>4</sup> Can be slightly exposed to water. A minimal shadow line visible at every 12'. Not available with Direct/Indirect.	<b>EPDO</b> - Environmentally Protected Direct Optic <b>ASDO</b> - Asymmetric Soft Direct Optic	<b>EPIO</b> - Environmentally Protected Indirect Optic <b>ASIO</b> - Asymmetric Soft Indirect Optic <b>WIO2</b> - Widespread Indirect Optic <b>NA</b> - Not applicable	<b>SOLA</b> - Dim-to-warm single channel control 35K to 22K <b>DUO</b> - Tunable white 2-channel control 65K to 27K  <sup>5</sup> Static white and BIOS also available. Consult other spec sheet.

CRI	DIR. LUM. PACK.	INDIR. LUM. PACK. Specify NA for Direct fixture	LUMINAIRE LENGTH	VOLTAGE	DRIVER <sup>7</sup>
<b>80</b> - 80 CRI <b>90</b> - 90 CRI	<b>500</b> - Low output 500 lm/ft <b>750</b> - Medium output 750 lm/ft <b>1000</b> - High output 1000 lm/ft	<b>500</b> - Low output 500 lm/ft <b>750</b> - Medium output 750 lm/ft <b>1000</b> - High output 1000 lm/ft <b>NA</b> - Not applicable	<b>#FT#IN</b> <sup>6</sup> - Specify nominal length (#) in 1' and/or 1" increments  <b>Standard nominal lengths:</b> Single units: 2' - 12' Continuous runs: lengths over 12'  <sup>6</sup> Minimum 3' for Direct/Indirect models.	<b>120</b> - 120V <b>277</b> - 277V <b>UNV</b> - 120V-277V	<b>SOLA</b> <b>SD1</b> - Single 0-10V input  <b>DUO</b> <b>DMX</b> <sup>8,9</sup> - DMX <b>DDA</b> <sup>9</sup> - DALI DT6 <b>DDA8</b> <sup>9</sup> - DALI DT8 <b>DD1</b> - Dual 0-10V input for CCT/intensity <b>PSQ0</b> <sup>9</sup> - Lutron T-Series 1% Tunable White  <sup>7</sup> PoE (Power-over-Ethernet) compatible. Consult factory for details. <sup>8</sup> For more information, see pages 11 to 16. <sup>9</sup> On-site commissioning is required.

ELECTRICAL	POWER FEED	MOUNTING <sup>10</sup>	FINISH	OPTIONS
<b>1C</b>	<b>TF</b>			
<b>1C</b> - 1 circuit	<b>TF</b> - Top feed	<b>STS</b> - Stem, standard <b>STC()</b> - Stem, custom  <sup>10</sup> See page 2 for ordering details.	<b>W</b> - Matte white <b>AL</b> - Aluminum <b>WA</b> - White antimicrobial Silverwerx <b>CF#</b> - Custom finish, specify RAL#	<b>NATA</b> - Natatorium finish <b>CRF</b> - Corrosion-resistant finish <b>NA</b> - None

## Accessories

Optional, order separately

### DMX WALL CONTROLLER <sup>11</sup>

**WCW** - Wall controller white  
**WBW** - Wall controller black

<sup>11</sup> Available with DMX only. For more information, see pages 11 to 16, or consult factory.

# VIA 4 SEAL

## PENDANT

DIRECT, DIRECT/INDIRECT

CHROMAWERX - SOLA AND DUO

VIA WEATHER SERIES

# LUMENWERX

## Pendant Mounting Code

### Standard

For a standard mounting, please refer to the information below.

#### MOUNTING

##### STS - Stem, standard

Ø5" for power canopy  
Ø5" for non-power  
Canopies are white  
Stem finish is the same color as fixture  
Stem length is 18"  
Stem is not field adjustable

### Custom

#### Stem

For a custom mounting, specify the options in the parentheses.

Example: STC(5NPC-36-W-STW-SLS)

#### MOUNTING

##### STC()

	NON-POWER CANOPY SIZE	STEM LENGTH	CANOPY FINISH	STEM COLOR	OPTIONS
STC	5NPC - Ø5" non-power canopy	18 - 18" 36 - 36" # <sup>1</sup> - Specify length in inches  <sup>1</sup> Minimum length is 6". Maximum length is 72". Stem is not field adjustable.	W - White AL - Aluminum B - Black CF# - Custom finish, specify RAL#	STW - White STAL - Aluminum STB - Black STCF# - Custom finish, specify RAL#	SLS - Sloped ceiling for stem NA - None

# VIA 4 SEAL

PENDANT

DIRECT, DIRECT/INDIRECT



CHROMAWERX - SOLA AND DUO

VIA WEATHER SERIES


# LUMENWERX

## Section Views

### DIRECT





EPDO




ASDO


### DIRECT/INDIRECT




EPIO  
EPDO




ASIO  
EPDO




WIO2  
EPDO



EPIO  
ASDO



ASIO  
ASDO



WIO2  
ASDO

# VIA 4 SEAL

PENDANT

DIRECT, DIRECT/INDIRECT

CHROMAWERX - SOLA AND DUO

VIA WEATHER SERIES

## Environment Options

The Via Weather Series offers four levels of protective sealing: Level 1, Level 2, Level 3, and Level 4.

Via 4 Seal is available with two environment options: Wet Suitable (WET) at Level 1, and Wet Listed (WETL) at Level 2.

For other levels of protective sealing, please see Via Wet spec sheets for Level 3, and Via Splash spec sheets for Level 4.

### FEATURES

Direct distribution

Direct/Indirect distribution

Indoor application that requires wipe down

Healthcare application

Outdoor application with restrictions: under canopy only

Outdoor application with restrictions: under canopy, slightly exposed

Continuous line of light over 12 ft

Water and dust resistant

Water and dust protected

Not suitable for extreme weather applications

Damp listed

Wet listed



Wet Suitable  
(IP44)  
(WET)



Wet Listed  
(IP54)  
(WETL)

•	•
•	X
•	•
•	•
•	•
•	•
X	•
•	X
•	•
X	•
•	•
•	X
X	•

# VIA 4 SEAL

PENDANT


DIRECT, DIRECT/INDIRECT

CHROMAWERX - SOLA AND DUO

VIA WEATHER SERIES


## Photometrics

### DIRECT



EPDO - Delivered Lumens at 40K at 80 CRI

LUMENS PER FOOT	TOTAL LUMENS PER 4FT	INPUT WATTS	LPW
500	2000	19.8	101
750	3000	30.7	98
1000	4000	42.3	95



ASDO - Delivered Lumens at 40K at 80 CRI

LUMENS PER FOOT	TOTAL LUMENS PER 4FT	INPUT WATTS	LPW
500	2000	17.7	113
750	3000	27.9	107
1000	4000	39	103

# VIA 4 SEAL

PENDANT

DIRECT, DIRECT/INDIRECT


CHROMAWERX - SOLA AND DUO

VIA WEATHER SERIES

## Photometrics

### DIRECT/INDIRECT - WITH EPDO

Delivered lumens at 40K at 80 CRI for all optics.

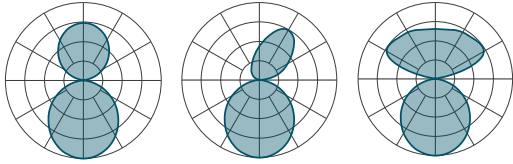

EPDO - EPIO    EPDO - ASIO    EPDO - WIO2

LM/FT		NOMINAL LM/4FT		TOTAL LM/4FT	INPUT WATTS	LPW
D	I	D	I			


EPDO		EPIO		TOTAL LM/4FT	INPUT WATTS	LPW
D	I	D	I			
500	500	2000	2000	4000	40.4	99
	750		3000	5000	52.4	95
	1000		4000	6000	65.5	92
750	500	3000	2000	5000	51.3	97
	750		3000	6000	63.3	95
	1000		4000	7000	76.4	92
1000	500	4000	2000	6000	62.9	95
	750		3000	7000	74.9	93
	1000		4000	8000	88.0	91

EPDO		ASIO		TOTAL LM/4FT	INPUT WATTS	LPW
D	I	D	I			
500	500	2000	2000	4000	36.7	109
	750		3000	5000	46.3	108
	1000		4000	6000	56.6	106
750	500	3000	2000	5000	47.6	105
	750		3000	6000	57.2	105
	1000		4000	7000	67.5	104
1000	500	4000	2000	6000	59.2	101
	750		3000	7000	68.8	102
	1000		4000	8000	79.1	101

EPDO		WIO2		TOTAL LM/4FT	INPUT WATTS	LPW
D	I	D	I			
500	500	2000	2000	4000	36.4	110
	750		3000	5000	45.9	109
	1000		4000	6000	55.9	107
750	500	3000	2000	5000	47.3	106
	750		3000	6000	56.8	106
	1000		4000	7000	66.8	105
1000	500	4000	2000	6000	58.9	102
	750		3000	7000	68.4	102
	1000		4000	8000	78.4	102

### DIRECT/INDIRECT - WITH ASDO

Delivered lumens at 40K at 80 CRI for all optics.

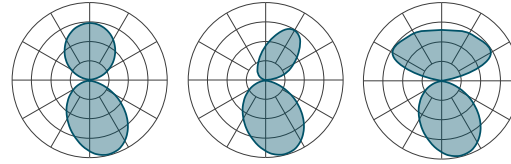

ASDO - EPIO    ASDO - ASIO    ASDO - WIO2

LM/FT		NOMINAL LM/4FT		TOTAL LM/4FT	INPUT WATTS	LPW
D	I	D	I			

ASDO		EPIO		TOTAL LM/4FT	INPUT WATTS	LPW
D	I	D	I			
500	500	2000	2000	4000	38.3	104
	750		3000	5000	50.3	99
	1000		4000	6000	63.4	95
750	500	3000	2000	5000	48.5	103
	750		3000	6000	60.5	99
	1000		4000	7000	73.6	95
1000	500	4000	2000	6000	59.6	101
	750		3000	7000	71.6	98
	1000		4000	8000	84.7	94

ASDO		ASIO		TOTAL LM/4FT	INPUT WATTS	LPW
D	I	D	I			
500	500	2000	2000	4000	34.6	116
	750		3000	5000	44.2	113
	1000		4000	6000	54.5	110
750	500	3000	2000	5000	44.8	112
	750		3000	6000	54.4	110
	1000		4000	7000	64.7	108
1000	500	4000	2000	6000	55.9	107
	750		3000	7000	65.5	107
	1000		4000	8000	75.8	106

ASDO		WIO2		TOTAL LM/4FT	INPUT WATTS	LPW
D	I	D	I			
500	500	2000	2000	4000	34.3	117
	750		3000	5000	43.8	114
	1000		4000	6000	53.8	111
750	500	3000	2000	5000	44.5	112
	750		3000	6000	54.0	111
	1000		4000	7000	64.0	109
1000	500	4000	2000	6000	55.6	108
	750		3000	7000	65.1	108
	1000		4000	8000	75.1	106

# VIA 4 SEAL

PENDANT

DIRECT, DIRECT/INDIRECT

CHROMAWERX - SOLA AND DUO

VIA WEATHER SERIES

# LUMENWERX

## Technical Specifications

### DIRECT OPTICS

#### Environmentally Protected Direct Optic (EPDO)

The Environmentally Protected Direct Optic creates a seal that blocks debris and moisture, and withstands UV distortion and moderate impact. This extruded snap-in lens has a gasket to ensure proper sealing. The lens is 1/16" thick and made of frosted polycarbonate. Internally, white, side kicking reflectors guide the light through the lens. The EPDO suits moderate climate environments.

#### Asymmetric Soft Direct Optic (ASDO)

The Asymmetric Soft Direct Optic creates a seal that blocks debris and moisture, and withstands UV distortion and moderate impact. This extruded snap-in lens has a gasket to ensure proper sealing. The lens is 1/16" thick and made of frosted polycarbonate. Internally, white, side kicking reflectors specifically angled to guide the light through the lens to create a nice asymmetric distribution. The ASDO suits moderate climate environments.

### INDIRECT OPTICS

#### Environmentally Protected Indirect Optic (EPIO)

The Environmentally Protected Indirect Optic creates a seal that blocks debris and moisture, and withstands UV distortion and moderate impact. The lens is 1/16" thick and made of frosted polycarbonate. This extruded snap-in lens has a gasket to ensure proper sealing. The EPIO suits moderate climate environments.

#### Asymmetric Soft Indirect Optic (ASIO)

The Asymmetric Soft Indirect Optic creates a seal that blocks debris and moisture, and withstands UV distortion and moderate impact. The lens is 1/16" thick and made of clear polycarbonate. This extruded snap-in lens has a gasket to ensure proper sealing. The total internal reflection and surface scattering optic is specifically angled to guide the light through the lens to create a nice asymmetric distribution. The ASIO suits moderate climate environments.

#### Widespread Indirect Optic (WIO2)

The Widespread Indirect Optic creates a seal that blocks debris and moisture, and withstands UV distortion and moderate impact. The lens is 1/16" thick and made of clear polycarbonate. This extruded snap-in lens has a gasket to ensure proper sealing. The total internal reflection and surface scattering optic offers an impressive 160° spread. WIO2 creates an even illumination for smooth brightness on the ceiling that can achieve uniformity ratios of up to 2:1. The WIO2 suits moderate climate environments.

#### Uniformity [max/min]

Based on 18' continuous runs, in a 20' x 40' room, 10' wall height

Mounting height from ceiling	Spacing (Center to center)		
	8'	10'	12'
24"	3.0	5.5	8.0
36"	2.0	3.0	4.5
48"	2.0	2.0	3.5

# VIA 4 SEAL

## PENDANT

### DIRECT, DIRECT/INDIRECT

### CHROMAWERX - SOLA AND DUO

#### VIA WEATHER SERIES

#### LIGHT SOURCE

Custom linear array of alternating color temperature mid-flux LEDs are mounted directly to the housing for optimal thermal performance. For the Duo products, a color temperature range from 6500K-2700K is achievable with color points on or below the black body curve. For the Sola products, a color temperature range from 3500K-2200K is controlled synchronously with intensity. Color consistency between fixtures is maintained to within 3 SDCM. LEDs are operated at reduced drive current to optimize efficacy and lumen maintenance.

All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

#### CHROMAWERX - TUNABLE WHITE


##### Chromawerx SOLA

It is a single-channel control that dims output while warming the color temperature in a pre-determined relationship. A simple analog control sends a common signal to dual output digital drivers, which are programmed to adjust a specially populated LED array to emulate the effect of dimming a filament source. Dimming range is programmable but the default option runs from 3500K at 100% of full power to 2200K at 5% of full power. CRI is maintained above 80 throughout the dimming range.

##### Chromawerx DUO

It is a two-channel control. It uses an analog (0-10V) protocol for separate control of luminaire CCT and intensity or a digital (DMX, DALI and PSQ0) protocol for synchronous control of both warm and cool LED arrays to enable the user to set color temperature and light output. Commonly called "tunable white", Chromawerx two-channel control provides the range of cool (6500K) to warm (2700K) color that can be useful for helping to entrain circadian rhythms, stimulate alertness for improved educational and work productivity, and compensate for jet lag, among other applications. The Chromawerx drivers are programmed to limit maximum light output and power usage across all color temperatures. CRI is maintained above 80.

#### ANSI C78.377-2015

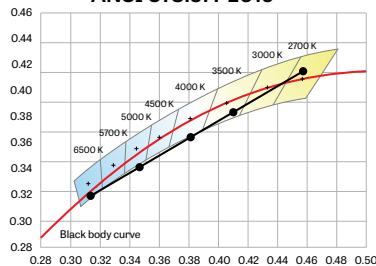

**WELL for Light** - The WELL building standard focuses on light quality in several features. There are three categories that are fully attributed to the construction and features of a luminaire. In WELL V1, it's Feature 54 Circadian Lighting, Feature 55 Glare Control, and Feature 58 Color Quality. In WELL V2, it's Feature L03 Circadian Lighting, Feature L04 Glare Control, and Feature L07 Electric Light Quality.

This fixture meets Features:

- Feature 54 or L03 when DUO is selected
- Feature 55 or L04 meets WELL glare category (c-d) (not applicable with 1000 lm/ft)
- Feature 58 or L07 when 90 CRI is selected

All LED drivers used at Lumenwerx are deemed to have a low risk level of flicker, of 5 % or less below 90Hz operational as defined by IEEE standard 1789-2015 LED.



**WELL for Mind** - This luminaire meets WELL for mind as it is a human centric luminaire offering quality light, excellent color, and smooth optics. If any of these features are incorporated in a luminaire, it can improve the ability to focus, concentrate, and persist longer on a given task. This fixture harmoniously operates in a space to assist the mind.

For more information, please contact [well@lumenwerx.com](mailto:well@lumenwerx.com)

#### LUMINAIRE LENGTH

Via 4 Seal is available in standard lengths of 2' to 12'. Continuous runs are available for run lengths over 12'. Exact run length must be noted in the product code. The minimum length is 2' for Direct fixtures, and 3' for Direct/Indirect fixtures. Lengths can be ordered in 1' and/or 1" increments. All individual sections are joined together onsite using the joiner kits provided. Lumenwerx joiner kits are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.

#### WEEP HOLES

The Direct/Indirect fixtures with the Wet Suitable (WET) option feature a weep hole situated in the end cap. Water and moisture that enters the fixture will be expelled through this hole.





# VIA 4 SEAL

PENDANT

DIRECT, DIRECT/INDIRECT


CHROMAWERX - SOLA AND DUO

VIA WEATHER SERIES

## JOINING SYSTEM


All individual sections are joined together onsite using the 1/4"-20 screws and nuts provided. With the Wet Suitable (WET) option, the junction between two adjacent sections creates a continuous line of light without shadows. With the Wet Listed (WETL) option, the junction between two adjacent sections is sealed with a silicone gasket, creating a slight visible break in the line of light every 12 ft.

### Wet Suitable - WET

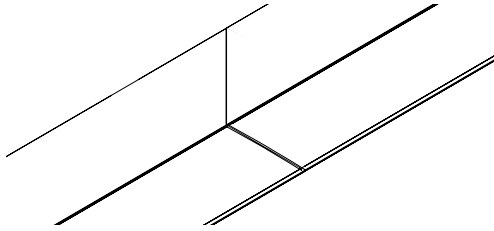

Continuous line of light

### Wet Listed - WETL

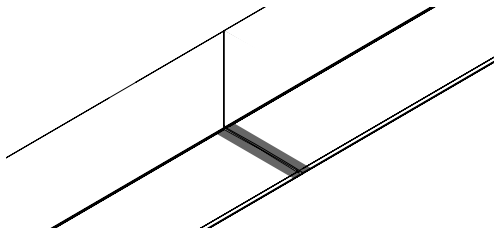

Visible break in line of light

## LUMINAIRE MAINTENANCE

LED arrays and drivers are accessible through the optical chamber and easily replaced.

## ELECTRICAL

### SOLA

#### SDI

Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Using a single 0-10V control signal, the light output warms in color temperature as it dims down to 1% and 2200K. At maximum driver load, efficiency<86%, PF>0.9, THD<20%.

### DUO

#### DMX

Factory-set adjustable output current electronic driver with 120-277V AC line input. Using DMX wall controls (optionally supplied by Lumenwerx) or an existing DMX control system, both channels of LEDs are independently adjustable. Each DMX driver can be independently addressed using the built-in RDM (Remote Device Management) in the field. Dimming down to 1% is attainable. Rated life (90% survivorship) of 50,000 hours at 50°C maximum ambient temperature. At maximum driver load, efficiency<84%, PF>0.9, THD<20%.

#### DALI

Factory-set adjustable output current electronic driver with 120-277V AC line input. Using an existing DALI control system (supplied by others), one control channel adjusts the fixture color temperature, and the other control channel adjusts fixture brightness. With DALI Type 6, two DALI addresses are required to control both channels. With DALI Type 8, one DALI address is required to control both channels. Dimming down to 1% is attainable. Rated life (90% survivorship) of 50,000 hours at 50°C maximum ambient temperature. At maximum driver load, efficiency<84%, PF>0.9, THD<20%.

#### DDI

Factory-set adjustable output current LED driver with universal (120-277VAC) input. Controlled via two individual 0-10V signals, one for setting light output down to a minimum of 1% and the other for adjusting the CCT (default range of 6500K-2700K). Rated life of 50,000 hours at 70°C maximum driver case temperature and 100% load conditions. Typical efficiency of 86%, PF>0.9, THD<20% at 100% load conditions.

#### PSQO

Lutron T-Series 2-Channel tunable white drivers enable high-performance human centric lighting (HCL) applications. Digital control of color temperature (CCT) and intensity are achieved when used with the ESN T-Series tunable white controller as a part of a Lutron Quantum System.

### PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, Duo (tunable white), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

# VIA 4 SEAL

## PENDANT

DIRECT, DIRECT/INDIRECT

CHROMAWERX - SOLA AND DUO

### VIA WEATHER SERIES

#### MOUNTING OPTIONS

Fixtures can be stem-mounted. Unless otherwise specified, Lumenwerx provides the following hardware:

**Standard stem option (STS)** - Canopies are white, Ø5" for both power and non-power. Stem finish is the same color as fixture. Stem length is 18". Stem is not field adjustable.

For all other options, see the mounting code on page 2.

#### FINISH

**Interior** - 95%, reflective matte powder coated white paint

**Exterior** - Powder-coat paint in matte white or aluminum.

Custom finishes are also available. Optional antimicrobial finish.

#### CONSTRUCTION

**Housing** - Extruded aluminum (0.095" nominal) up to 90% recycled content

**Interior brackets** - Die-formed cold rolled sheet steel 18 gauge thick

**Joining system (WETL)** - 16 gauge steel joiners and closed-cell silicone foam joiner gasket

**Reflectors** - Cold rolled steel 0.024" thick precisely die-formed, 95% reflective matte white painted

**End cap** - Die-cast aluminum (0.100" nominal)

**End cap gasket** - 1/16" closed-cell silicone foam

#### WEIGHT

Direct	Direct/Indirect
<b>4ft</b> - 15.0 lbs - 6.8 kg	<b>4ft</b> - 17.2 lbs - 7.8 kg
<b>8ft</b> - 27.6 lbs - 12.5 kg	<b>8ft</b> - 32.8 lbs - 14.9 kg
<b>12ft</b> - 40.1 lbs - 18.2 kg	<b>12ft</b> - 48.5 lbs - 22 kg

#### CERTIFICATIONS

**ETL** - WET environment option is rated for dry/damp locations.

WETL environment option is ETL Wet Listed. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0. During the installation of WETL fixtures, the contractor is responsible for properly sealing all mounting and electrical connection points.

**IK05** - Impact resistance rated to IK05.

#### WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.

# LUMENWERX

# VIA 4 SEAL

PENDANT

DIRECT, DIRECT/INDIRECT

CHROMAWERX - SOLA AND DUO

VIA WEATHER SERIES

# LUMENWERX

## DUO DMX SPECIFICATION

A qualified DMX integrator is required to assure proper installation and commissioning of the DMX network. **When placing the PO, please provide the contact information of your DMX integrator.**

Please answer the following questions to help us identify your DMX network requirements.

YES

Do you require a wall controller provided by Lumenwerx?

NO

DMX controller supplied by Lumenwerx

DMX control system supplied by others. Lumenwerx will supply DMX-enabled fixtures with default DMX addressing. See following pages for technical DMX informations. ✓

### How many zones do you have?

A zone consists of one or more luminaires behaving identically.



1 Zone



2 Zones

### How to calculate the required number of drivers:

per 4' fixture

Driver

1x driver

Direct only

per 4' fixture

Driver

Driver

2x driver

Direct high output

To Calculate  
# of drivers

1 - 4 Zones

5 or more Zones

Do you have more than  
32 drivers in total?

NO

YES

Order a standard Lumenwerx wall controller.

#### WALL CONTROLLER

**WCW** - wall controller white  
**WCB** - wall controller black

Add the control code at the end of your order code.

Please provide a fixture layout or RCP (Reflected Ceiling Plan) showing the locations of the DMX fixtures, zones and the DMX wall controller.

Refer to your DMX integrator for the installation. ✓

Subject to factory evaluation. Please contact our controls specialist at [controls@lumenwerx.com](mailto:controls@lumenwerx.com). Additional cost and equipment will be required. ✓

Subject to factory evaluation and approval. Please contact our controls specialist at [controls@lumenwerx.com](mailto:controls@lumenwerx.com). Additional cost and equipment will be required. ✓

# VIA 4 SEAL

PENDANT


DIRECT, DIRECT/INDIRECT

CHROMAWERX - SOLA AND DUO

VIA WEATHER SERIES

## LUMENWERX

### GENERIC DMX NETWORK ARCHITECTURE

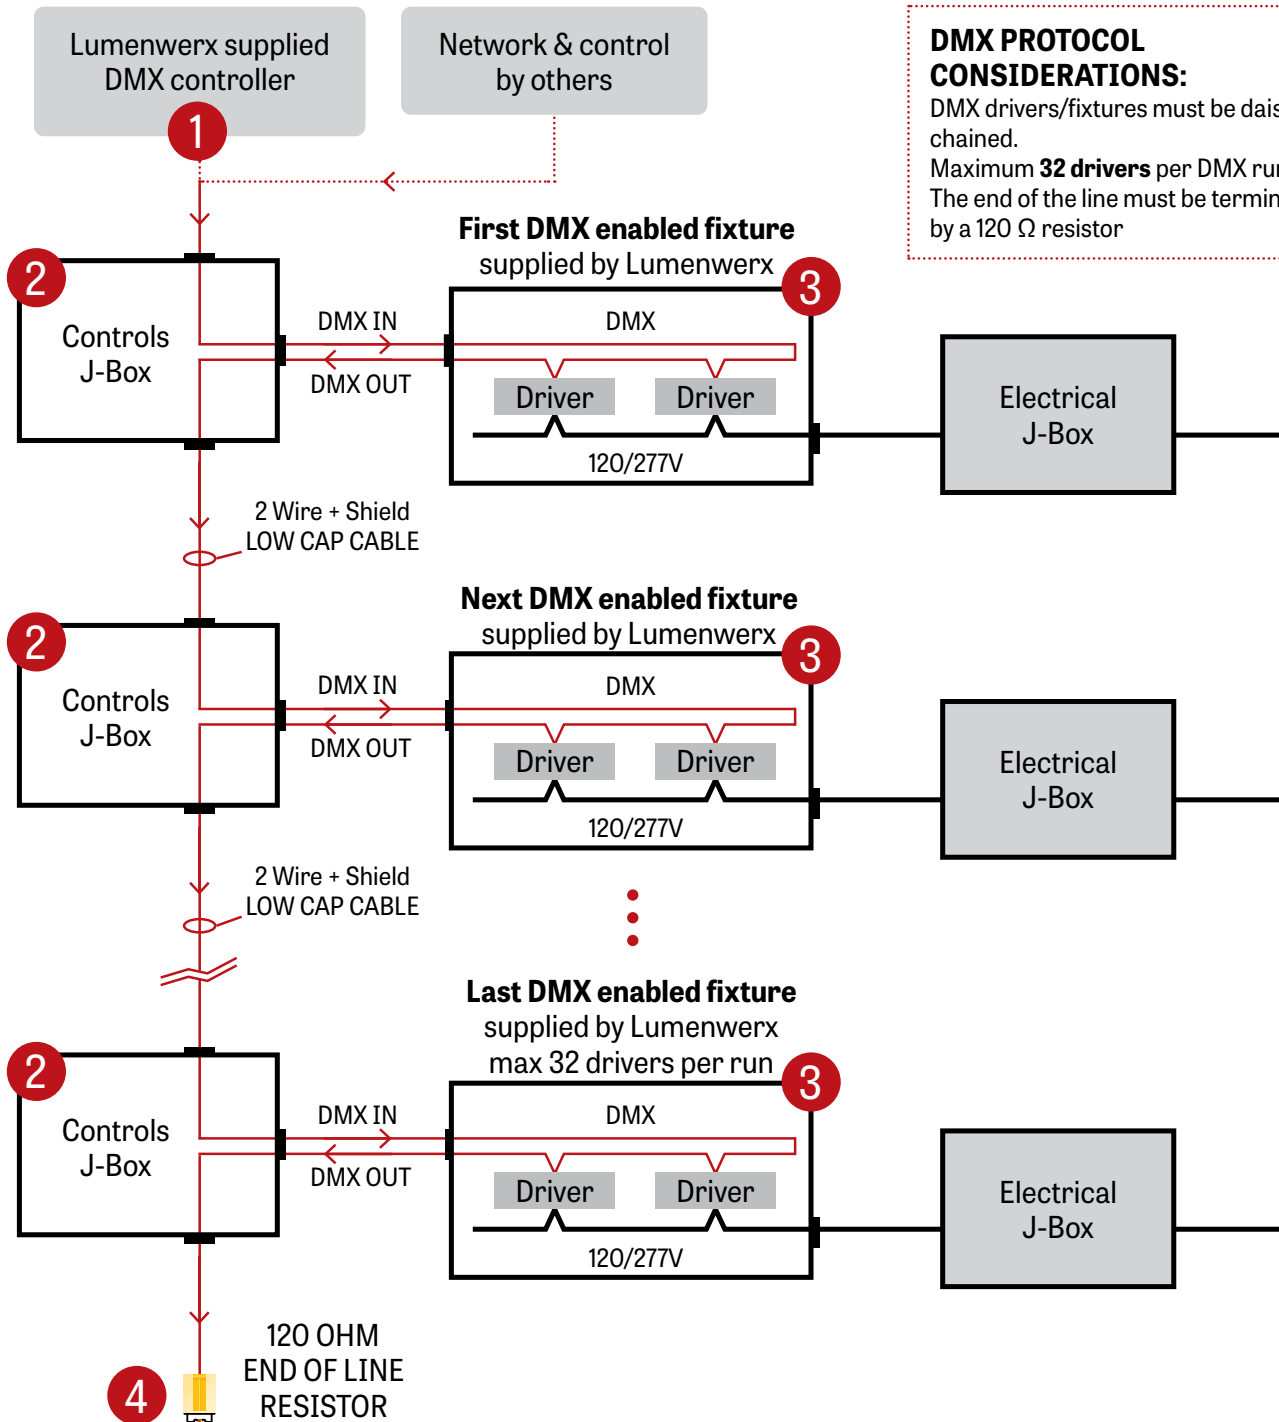

# VIA 4 SEAL

PENDANT

DIRECT, DIRECT/INDIRECT

CHROMAWERX - SOLA AND DUO

VIA WEATHER SERIES


# LUMENWERX

## 1 LUMENWERX SUPPLIED DMX CONTROLLER


To the first fixture

2 Wire +  
Shield Low Cap Cable

Back Panel

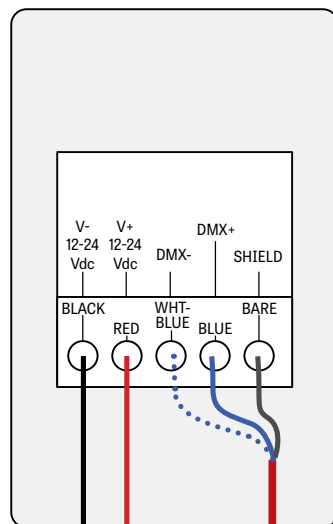

Front Panel

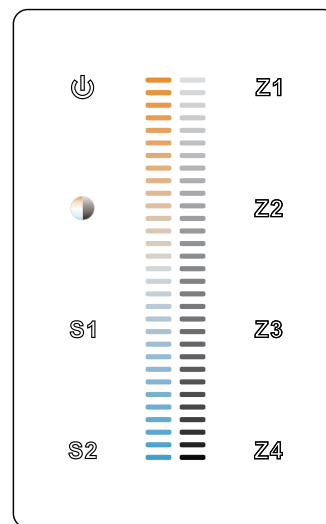


Controller image may differ

I.E.: Cerco Cable 7539-10  
Belden 9841  
Belden 8241

DC out

Power Supply  
120-277VAC / 24VDC

N  
L

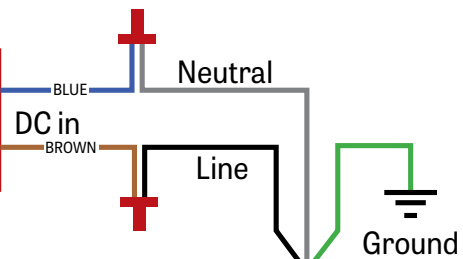

Electrical  
J-Box

# VIA 4 SEAL

PENDANT

DIRECT, DIRECT/INDIRECT


CHROMAWERX - SOLA AND DUO

VIA WEATHER SERIES

## LUMENWERX


### 2 J-BOX DMX DAISY CHAIN DETAIL

Low capacitance DMX Cable from Previous Fixture

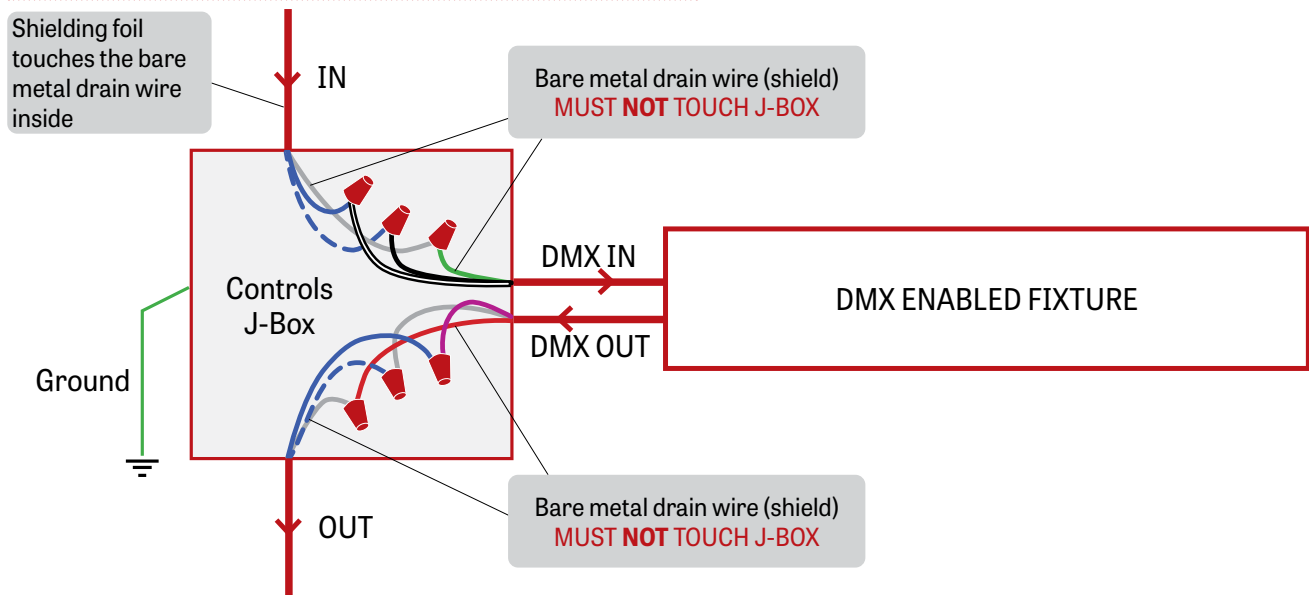

Low capacitance DMX cable to next fixture

### 3 DMX CONNECTION PENDANT & WALL

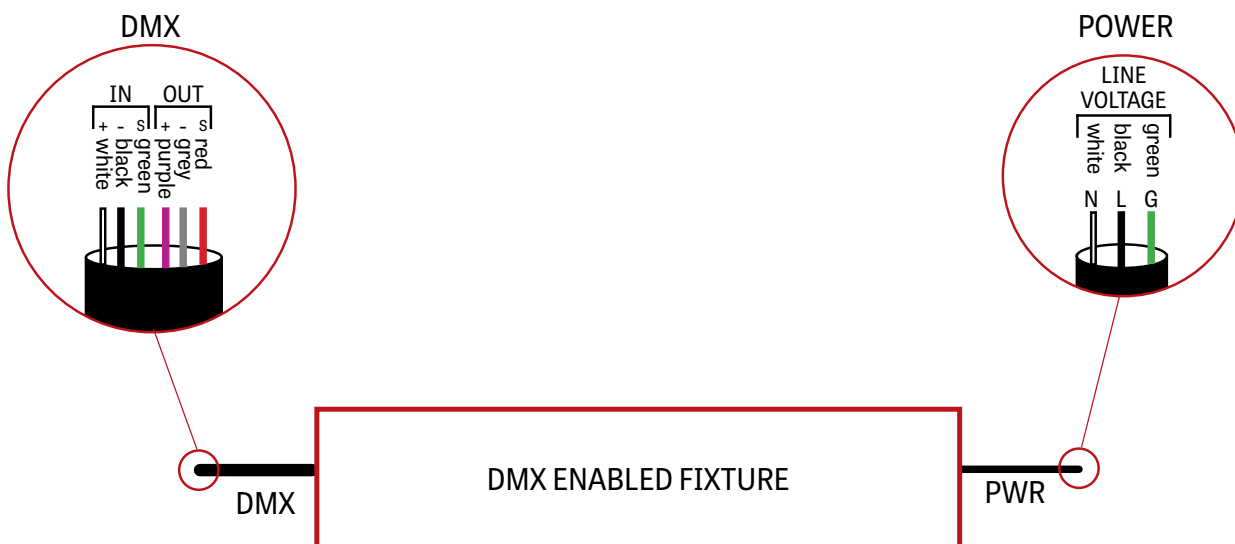

# VIA 4 SEAL

PENDANT

DIRECT, DIRECT/INDIRECT


CHROMAWERX - SOLA AND DUO

VIA WEATHER SERIES

## LUMENWERX

4

### DMX LAST FIXTURE DETAIL

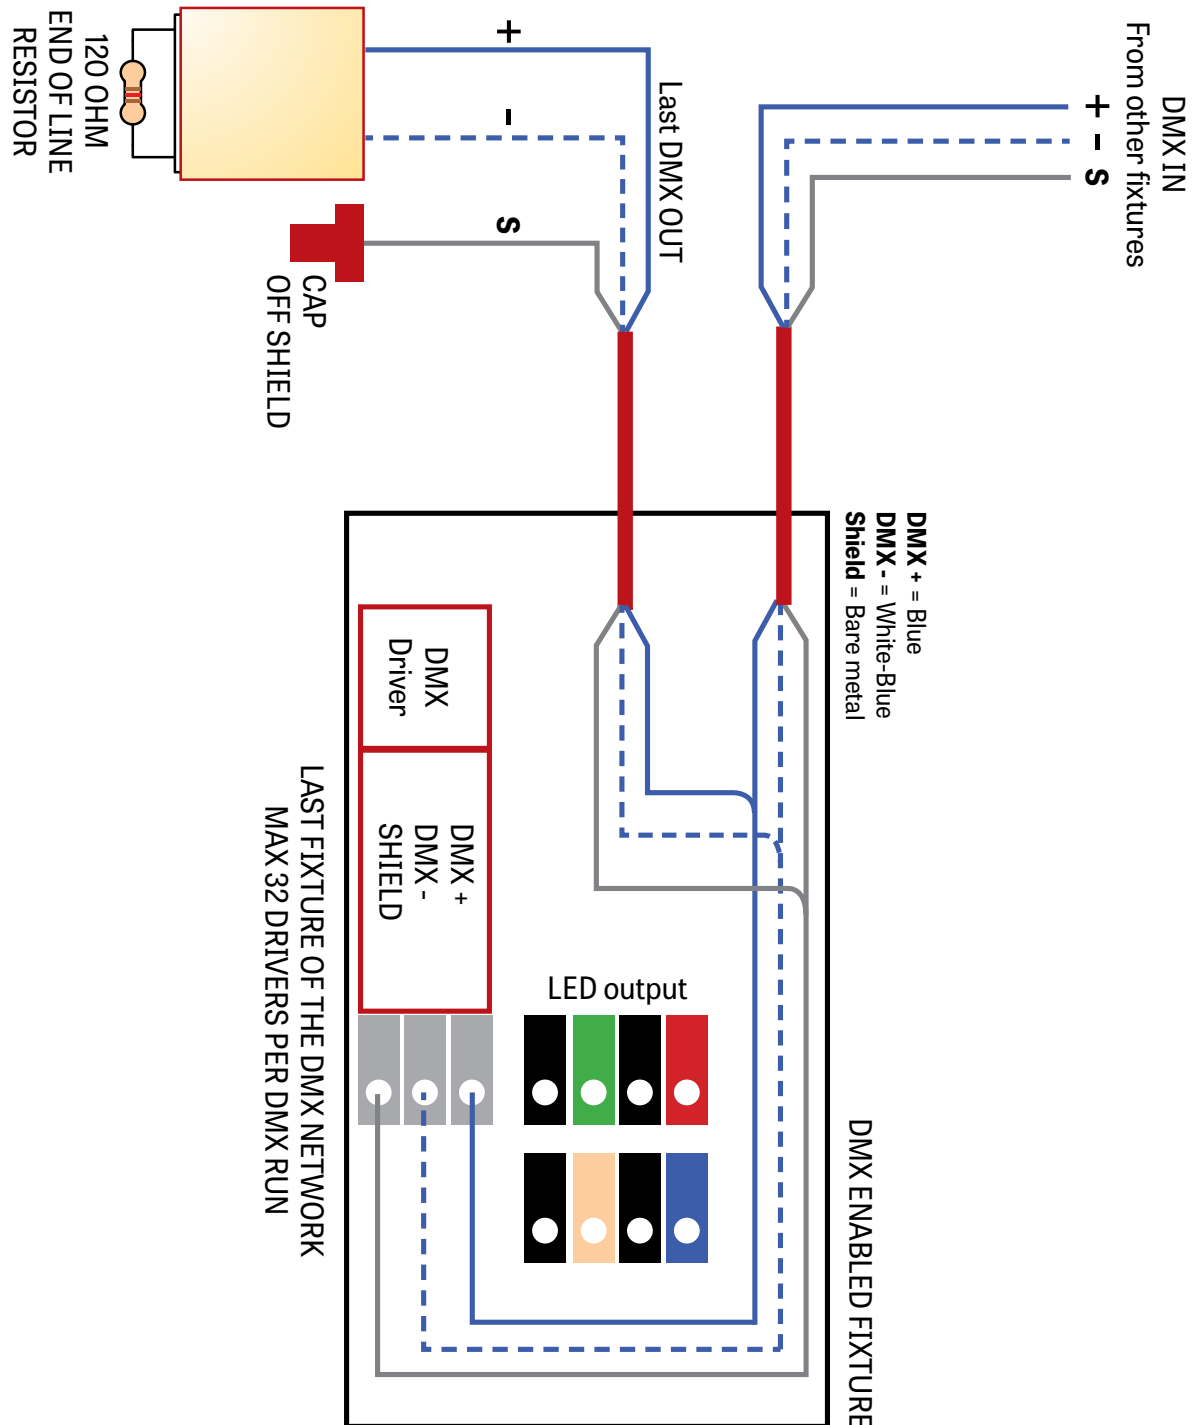

# VIA 4 SEAL

PENDANT

DIRECT, DIRECT/INDIRECT


CHROMAWERX - SOLA AND DUO

VIA WEATHER SERIES

# LUMENWERX

## DMX WALL CONTROLLER

### DUO 1-4 ZONE

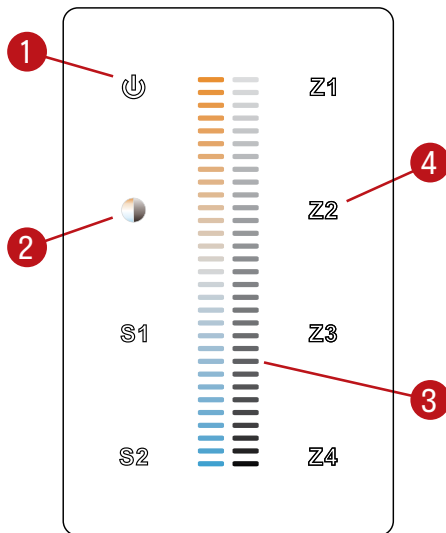

(1) Power:

Use this button to turn ON or OFF the fixture.

(2) Brightness/CCT:

Use the color/brightness toggle button to choose between color/brightness. When Blue: brightness is selected, when Yellow: color is selected.

(3) Slider:

Depending on the mode chosen in step 2, the slider will allow the user to set desired color or brightness.

(4) Zone select:

Up to 4 zones can be selected either independently or together. Once selected, the commands will be sent to the zone identified by a Blue LED.

### Default DMX Addresses:

1 Warm

2 Cool