

VIA 5 RECESSED PATTERN


DIRECT
STATIC WHITE, BIOS



Project: _____
Type: _____



Leveled corner



Inner corner



Outer corner


DESCRIPTION

Our elegant, flexible Via family is composed of linear, pendant, surface, recessed, and wall mounted luminaires. Each lighting fixture can be installed as a discrete luminaire or in continuous runs or patterns in which a combination of luminaires forms part of a custom design that can also incorporate less conventional acute and obtuse angles. Via 5 Recessed is offered with Lambertian, asymmetric, or wall wash optics.


Up to 139 lm/W performance

IC RATED


SENSORS
For latest
information
on sensors,
click [here](#).

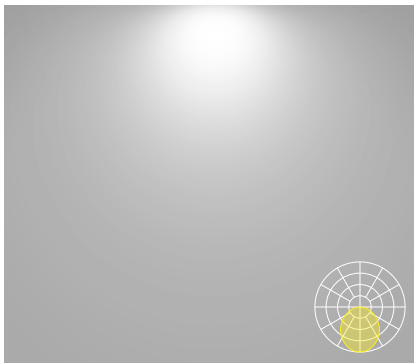

HLO¹
High-Efficiency Lambertian Optic

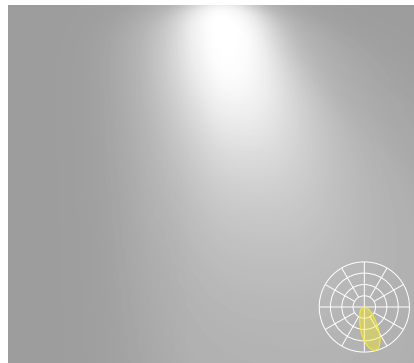

ARO2
Asymmetric Refractive Optic

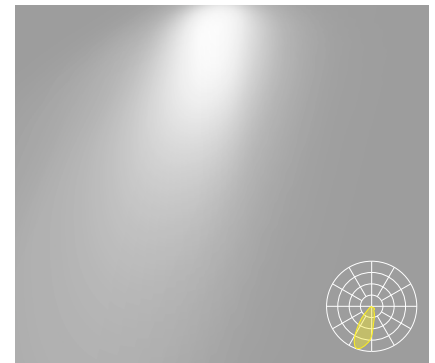

WRO2
Wall Wash Refractive Optic

¹ Regressed lens and drop lens positions available with HLO only.

VIA 5 RECESSED PATTERN



DIRECT
STATIC WHITE, BIOS

Project: _____
Type: _____

Order Guide

A drawing of your pattern is required - anything from a line drawing to an architectural drawing.

| LUMINAIRE ID | DISTRIBUTION | OPTIC | LENS POSITION | LIGHT SOURCE ² | CRI |
|---|-------------------|--|--|--|--|
| VIA5RPAT | D | | | | |
| VIA5RPAT - Via 5" Recessed Pattern | D - Direct | HLO - High-Efficiency Lambertian Optic ARO2 - Asymmetric Refractive Optic WRO2 - Wall Wash Refractive Optic | FH - Flush RG ¹ - Regressed 1.0D ¹ - 1.0" drop ¹ Available with HLO only. | SW - Static white BIOSS ^{3,4} - BIOS Biological Static BIOSDY ^{3,4} - BIOS Biological Dynamic BIOSTU ^{3,4} - BIOS Biological Tunable ² Chromawerx Sola, Duo and Quadro also available. Consult other spec sheets. ³ Only available with low and medium lumen packages. ⁴ See page 7 for details. | 80CRI - 80 CRI 90CRI ⁵ - 90 CRI ⁵ Not available with BIOS. |

| LUMEN PACKAGE | COLOR TEMP. | PATTERN LENGTH | CORNER TYPE ¹¹ |
|--|---|---|--|
| 350LMF ⁶ - Hypo output 350 lm/ft 500LMF - Low output 500 lm/ft 750LMF - Medium output 750 lm/ft 1000LMF - High output 1000 lm/ft 1200LMF - Ultra high output 1200 lm/ft 1500LMF ^{7,8} - Hyper output 1500 lm/ft ⁶ Minimum 3' fixture. ⁷ Available with HLO only. ⁸ Fixture will be very bright. Use in suitable applications. | 27K ⁹ - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K ⁹ - 5000K ⁹ Not available with BIOS. | ##FT##IN(##X#FT#IN-##X#FT#IN-...) ¹⁰ - ##FT##IN : total nominal length of pattern in feet and/or inches #X : quantity of each section #FT#IN : nominal length of each section in feet and/or inches Continuous runs: lengths over 12' ¹⁰ Minimum 2'. | #LEV2C(##) - 2-way leveled corner #LEV3C(##) ^{12,13} - 3-way leveled corner #LEV4C(##) ^{12,13} - 4-way leveled corner #INN2C(90) ^{13,14} - 2-way inner corner #OUT2C(90) ^{13,14} - 2-way outer corner ¹¹ Specify quantity (#) and angle (##) for each required corner type. ¹² Separate angles with a "+" if more than one type is required, e.g. 1LEV4C(60+120). ¹³ Not available with ARO2/WRO2. ¹⁴ Available with 90° only. Consult factory for other angles. ¹⁵ Minimum angle is 45°. For ARO2/WRO2, minimum angle is 75°. |

| VOLTAGE | DRIVER ¹⁷ | ELECTRICAL | ELECTRICAL SECTIONS (optional) ^{23,24} | MOUNTING CEILING ²⁹ | MOUNTING WALL |
|--|---|---|--|--|---|
| 120V - 120V 277V - 277V UNV - 120V-277V 347V ¹⁶ - 347V ¹⁶ Available with D1 driver only. | D1 - 1% 0-10V DA ¹⁸ - DALI LDE1 ¹⁸ - Lutron Hi-lume 1% Eco ELD1 - eldoLED 1% ECODrive 0-10V ELDO - eldoLED 0.1% SOLODrive 0-10V ELV ¹⁹ - ELV 120V TRI ¹⁹ - TRIAC 120V ¹⁷ PoE (Power-over-Ethernet) compatible. Consult factory for details. ¹⁸ On-site commissioning is required. ¹⁹ Available with 120V only. | 1C - 1 circuit #MC ²⁰ - Multi circuit EC - Emergency-powered fixture NL - Night light fixture DL - Daylight fixture GT ^{21,22} - Generator transfer device fixture ²⁰ Specify total number of circuits (#), including any required for electrical section or COB options. Provide drawing or layout specifications. Minimum 4' section per circuit. ²¹ Minimum 4' fixture. ²² Not available with 347V. | #EC## ²⁵ - Emergency-powered section #NL## ²⁵ - Night light section #DL## ²⁵ - Daylight section #GTD## ^{25,26,27} - Generator transfer device section #EMB ^{27,28} - Emergency battery NA - None ²³ Specify with multi circuit (#MC) electrical option only. ²⁴ Provide drawing or layout specifications. Consult factory for other configurations. Default section length is 4'. ²⁵ Specify quantity (#), and section length in inches (##). ²⁶ Minimum 4' section. ²⁷ Not available with 347V. ²⁸ Not available quantity (#). All batteries will be on the same circuit. Each battery powers a 4' section. | TG9 - T-bar 9/16" TG15 - T-bar 15/16" TB9 - T-bar 9/16" TB15 - T-bar 15/16" ST - Screw slot T-bar DTR - Drywall trim DTL - Drywall trimless DMF - Drywall mud flange NA - Not applicable MFM ³⁰ - Multiple flange mounting ²⁹ Transition mounting options also available (e.g. Recessed to Pendant/Surface), consult factory for details. ³⁰ See page 4 for details. | DTR - Drywall trim DTL - Drywall trimless DMF - Drywall mud flange NA - Not applicable |

| FINISH | CONTROL ³¹ | OPTIONS | MODULE (optional) ^{38,39} |
|--|---|---|---|
| W - Matte white B - Matte black CF# - Custom finish, specify RAL# | STANDALONE CONTROLS ^{32,33,34} Specify the quantity (#) of sensors per fixture. #OMS ³⁵ - Onboard Occupancy #OMS## ³⁶ - Onboard Occupancy with bi-level dimming #ODS - Onboard Daylight #OCS - Onboard Occupancy & Daylight NA - None ³¹ Standalone and connected control options cannot be combined. ³² Available with D1 driver and 1 circuit options only. ³³ Minimum 4' per zone. Provide control zone length. ³⁴ Available with flush lens option only. | CONNECTED CONTROLS ³⁷ LU - Lutron AWN - Lutron Athena Wireless Node RF Only AWNS - Lutron Athena Wireless Node Sensor EN - Enlighted ENC - Encelium WL - Cooper Wavelinx AN - Acuity nLight CA - Casambi LG - Legrand ³⁵ Fixture turns off when no occupancy. ³⁶ Fixture dims to specified light level % (##). ³⁷ Consult factory for connected controls. | FUI20 - Fuse 120V FUI277 - Fuse 277V FWC - Flexible whip cable (6' std) CP - Chicago Plenum NA - None #COB20() - COB downlight 20° #COB30() - COB downlight 30° #COB40() - COB downlight 40° NA - None ³⁸ See page 3 for ordering details. ³⁹ If more than one option is specified, separate codes with a "+", e.g. 1COB20()+1COB30(). |

TECHZONE™ & USG Compatible with 6" ceiling

3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9
T (514) 225-4304 F (514) 931-4862
www.lumenwerx.com



Lumenwerx reserves the right to modify product specifications without notification.
© Lumenwerx, ULC. All rights reserved.
VIA5-RECESSED-PAT-SPEC-REV2

October 24, 2023



VIA 5 RECESSED PATTERN



DIRECT
STATIC WHITE, BIOS

Module




For a module, specify the options in the parentheses.

Example: 1COB20(SW-80CRI-600LM-27K)







| MODULES (optional) | | | | |
|--|--------------------------|---|--|--|
| MODULES ^{1,2,3,4,5} | LIGHT SOURCE | CRI | LUMEN PACKAGE ⁶ | COLOR TEMP. |
| #COB20() - COB downlight 20° #COB30() - COB downlight 30° #COB40() - COB downlight 40° NA - None ¹ LED downlight available with Direct only. ² Minimum 4' fixture and minimum 2' section per COB. Consult factory for other configurations. ³ Specify quantity (#). ⁴ 6" Blank per module. ⁵ If more than one option is specified, separate codes with a "+", e.g. 1COB20(...)+1COB30(...). | SW - Static white | 80CRI - 80 CRI 90CRI - 90 CRI 97CRI - 97 CRI | 600LM - 600 lm 1200LM - 1200 lm 1800LM - 1800 lm ⁶ See page 6 for wattages. | 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K |

Dimensions



DRYWALL



GRID



LENS POSITIONS



¹ Regressed lens and drop lens positions available with HLO only.

VIA 5 RECESSED PATTERN


DIRECT
STATIC WHITE, BIOS

Multiple Flange Mounting Details


Multiple flange mounting can be specified when a fixture run needs to have a multiple flange recessed mounting detail. A drawing is required to clearly illustrate the application.

CEILING CONDITION EXAMPLES (consult factory for project specific ceiling conditions)


DRYWALL/GRID

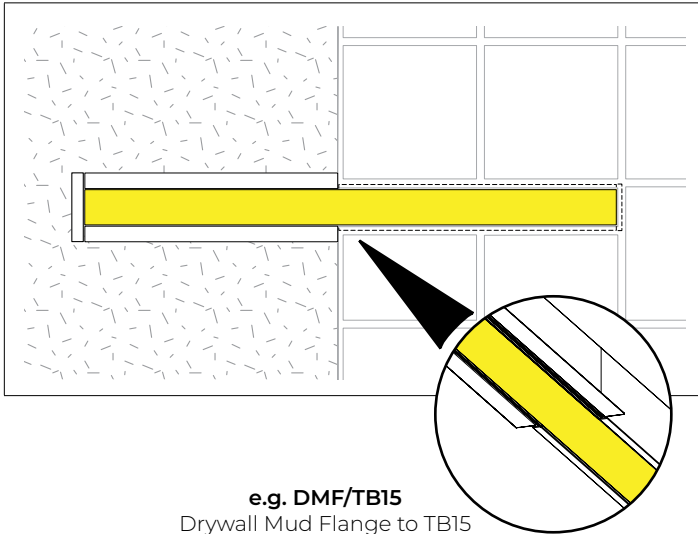

DRYWALL/WOOD

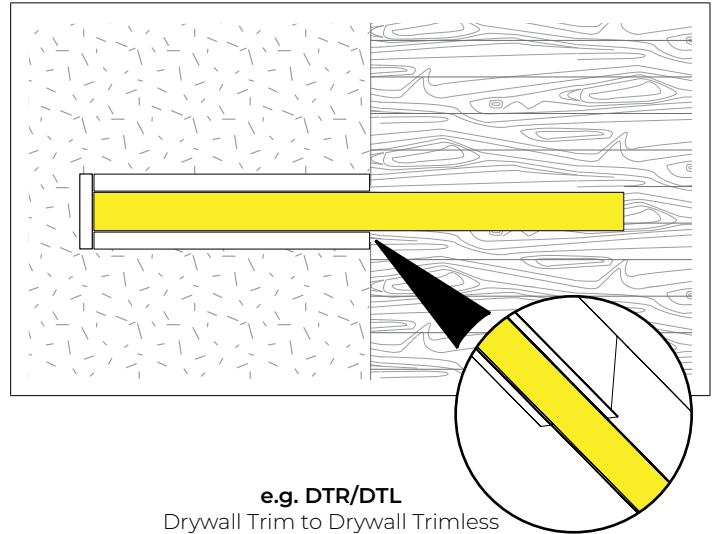


DRYWALL/GRID

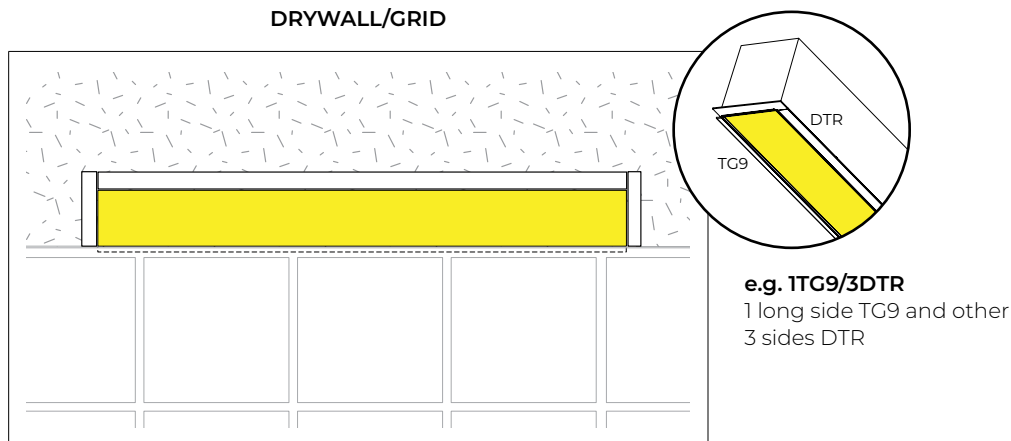


All drawings are for illustrative purposes only.

TRANSITION MOUNTING OPTIONS (consult factory for details)


Mounting condition alters along the run of the fixture.




Recessed to Pendant



Surface to Pendant



Surface to Recessed in corner



Surface to Pendant in corner

VIA 5 RECESSED PATTERN

DIRECT
STATIC WHITE, BIOS

Pattern Layout


CORNER TYPES

LEVELED CORNERS


INNER CORNER

OUTER CORNER


2-way



1LEV2C(90)




1INN2C(90)




1OUT2C(90)


3-way



1LEV3C(60+120)




1LEV3C(90+90)




1LEV3C(120)

4-way




1LEV4C(90)




1LEV4C(60+120)


EXAMPLES




8FT(2X4FT)-1LEV2C(90)



14FT(2X4FT-2X3FT)-4LEV2C(90)



7FT(1X3FT-1X4FT)-1INN2C(90)



8FT(2X4FT)-1OUT2C(90)

VIA 5 RECESSED PATTERN




DIRECT
STATIC WHITE, BIOS

Photometrics


Values calculated based on a 4ft fixture at 35K and 80 CRI for all optics.

HLO (Flush Lens)




| LM/FT | W/FT | LPW |
|-------|------|-----|
| 350 | 2.7 | 132 |
| 500 | 3.9 | 129 |
| 750 | 6.0 | 126 |
| 1000 | 8.2 | 122 |
| 1200 | 10.1 | 119 |
| 1500 | 13.0 | 116 |

ARO2



| LM/FT | W/FT | LPW |
|-------|------|-----|
| 350 | 3.0 | 116 |
| 500 | 4.4 | 113 |
| 750 | 7.0 | 107 |
| 1000 | 9.7 | 103 |
| 1200 | 12.1 | 99 |

WRO2



| LM/FT | W/FT | LPW |
|-------|------|-----|
| 350 | 3.0 | 116 |
| 500 | 4.4 | 112 |
| 750 | 7.0 | 107 |
| 1000 | 9.8 | 102 |
| 1200 | 12.1 | 99 |

MULTIPLIER TABLES

Use these tables to get results for different color temperatures, CRI, and drop lenses, for all photometric tables.

Multiplier - CCT/CRI

| CCT (K) | WATTS | | LPW | |
|---------|--------|--------|--------|--------|
| | CRI 80 | CRI 90 | CRI 80 | CRI 90 |
| 2700 | 1.05 | 1.27 | 0.95 | 0.79 |
| 3000 | 1.02 | 1.23 | 0.98 | 0.81 |
| 3500 | 1.00 | 1.19 | 1.00 | 0.84 |
| 4000 | 1.00 | 1.19 | 1.00 | 0.84 |
| 5000 | 0.96 | 1.12 | 1.04 | 0.89 |

Multiplier - Drop Lens

| DIRECT LENS | WATTS | LPW |
|----------------|-------|------|
| Flush Lens | 1.00 | 1.00 |
| Drop Lens 1.0" | 0.88 | 1.12 |

COB

Use these tables to get results for different color temperatures and CRI for all COB photometric tables.

COB Multiplier - CCT/CRI

| CCT (K) | CRI 80 | CRI 90 |
|---------|--------|--------|
| 2700 | 1.10 | 1.36 |
| 3000 | 1.03 | 1.29 |
| 3500 | 1.00 | 1.27 |
| 4000 | 1.00 | 1.22 |
| 5000 | 1.00 | 1.18 |

COB Wattage

| COB ANGLE | CRI 80 | | | | | | | | | CRI 90 | | | | | | | | |
|-----------|--------|------|------|-----|------|------|-----|------|------|--------|------|------|-----|------|------|-----|------|------|
| | 20 | | | 30 | | | 40 | | | 20 | | | 30 | | | 40 | | |
| Lumen | 600 | 1200 | 1800 | 600 | 1200 | 1800 | 600 | 1200 | 1800 | 600 | 1200 | 1800 | 600 | 1200 | 1800 | 600 | 1200 | 1800 |
| Wattage | 5.8 | 11.7 | 18.1 | 6.0 | 11.9 | 18.3 | 6.4 | 12.6 | 19.4 | 7.3 | 14.8 | 22.9 | 7.7 | 15.0 | 23.2 | 8.2 | 16.1 | 24.7 |


VIA 5 RECESSED PATTERN






DIRECT
STATIC WHITE, BIOS

BIOS

Three BIOS Circadian LED solutions are offered – Biological Static, Biological Dynamic, and Biological Tunable. Use the decision tree below to identify when and where to use BIOS Wellness LED Lighting Solutions.

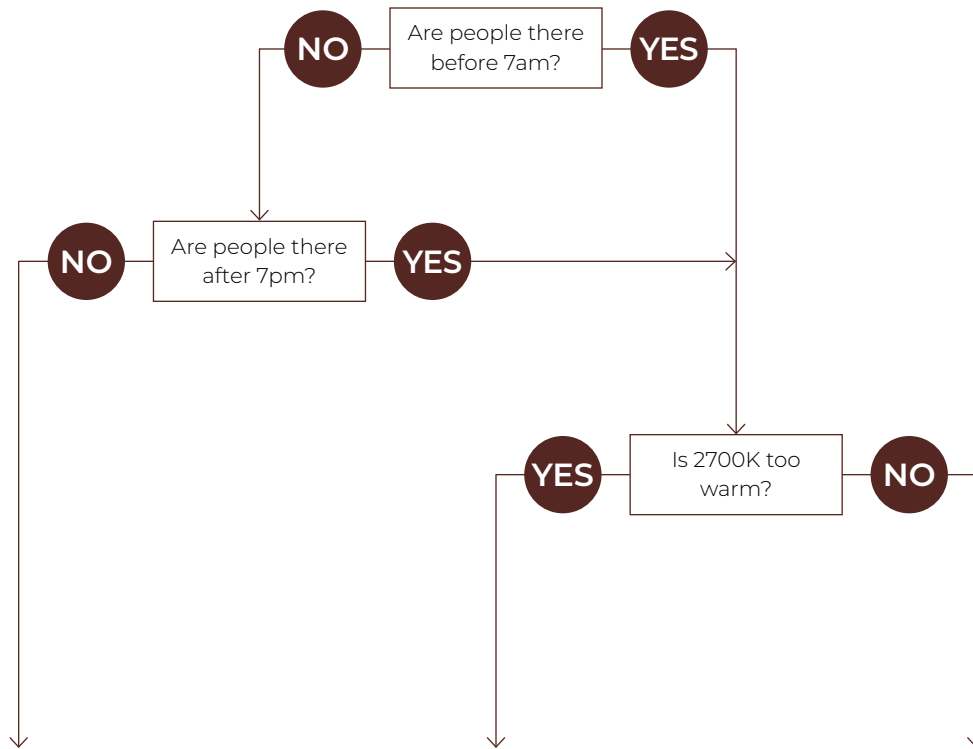
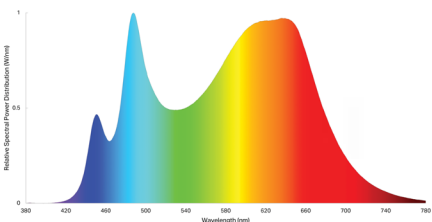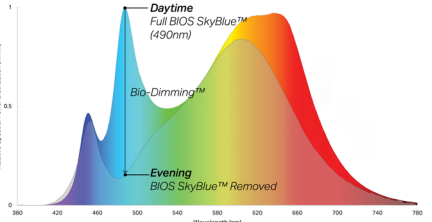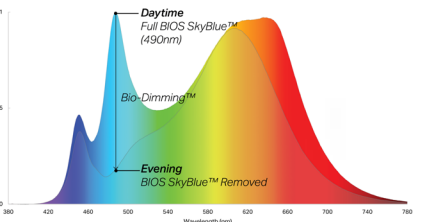
| Biological Static BIOSST | Biological Dynamic BIOSDY | Biological Tunable BIOSTU |
|---|---|---|
| No CCT change when dimmed | 500K shift when dimmed | Dims to 2700K |
| Daytime solution | Daytime + evening solution | Daytime + evening solution |
| Spaces in operation during daytime hours, between 7am and 7pm | Spaces in operation overnight, after 7pm and before 7am, and when CCT color shift in the evening is not preferred | Suitable for spaces in operation overnight, after 7pm and before 7am, and where people do not sleep (CCT color shift in the evening is preferred) |
| E.g. offices, medical/dental offices | E.g. hospitals | E.g. offices, shiftwork |
|  |  |  |

VIA 5 RECESSED PATTERN



DIRECT
STATIC WHITE, BIOS

Technical Specifications

OPTICS

High-Efficiency Lambertian Optic (HLO)

The High-Efficiency Lambertian Optic (HLO) uses matte white reflectors to distribute LED output across 0.075" acrylic shielding, providing up to 88% transmission and good obscuration. Available as a flush lens or as a drop lens, the HLO has a spacing criterion of 1.22.

Asymmetric Refractive Optic (ARO2)

The Asymmetric Refractive Optic (ARO2) uses a sophisticated reflector combined with a matte beam-shaping film to create a smooth, effective downward light component without shadows or hot spots. It provides directional Gaussian light distribution with peak intensity at 20° above nadir and a 55° Full Width at Half Maximum (FWHM) beam angle. Microstructure material applied to the snap-in lens provides the precise refractive power and visual comfort, while achieving high luminous efficacy.

Wall Wash Refractive Optic (WRO2)


The Wall Wash Refractive Optic (WRO2) delivers smooth vertical illumination with a gentle gradient and soft visual cut-off. Its exacting configuration creates a strong downward light component without shadows or hot spots and provides light distribution with peak intensity at 21° above nadir. Microstructure material applied to the snap-in lens provides the precise refractive power and visual comfort, while achieving a high luminous efficacy.

LIGHT SOURCE - STATIC WHITE

Custom linear array of mid-flux LEDs are cartridge-mounted with quick-connect wiring to facilitate service and thermal management. Available in 2700K, 3000K, 3500K, 4000K, and 5000K with a minimum 80 CRI and an option for 90 CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. LEDs operate at reduced drive current to optimize efficacy and lumen maintenance. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

LIGHT SOURCE - BIOS

BIOS SkyBlue™ Technology is designed to provide the specific circadian stimulus to improve overall sleep quality, recovery during the night, and overall feelings of well-being. The non-visual light signals that stimulate our circadian system have peak intensity in the "sky blue" region. As the diagram below illustrates, BIOS SkyBlue technology shifts the peak LED spectral intensity (490 nm) to align better with the peak response of circadian stimulus. Also note the enhanced deep-red (near 660 nm) spectrum.

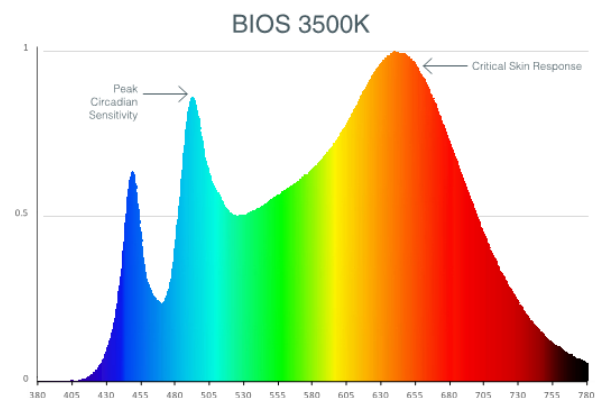

Three BIOS solutions are offered: BIOS Biological Static (BIOSST), BIOS Biological Dynamic (BIOSDY), and BIOS Biological Tunable (BIOSTU). See page 7 for details.

PATTERN LENGTH

All individual sections are joined together onsite using the joiner kits provided. Lumenwerx offers joiner kits that are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.

VIA 5 RECESSED PATTERN



DIRECT
STATIC WHITE, BIOS

ELECTRICAL

Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency > 84%, PF > 0.9, THD < 20%. Other specifiable options include Lutron Hi-Lume 1% Eco, eidoLED 1% Ecodrive 0-10V, eidoLED 0.1% SOLOdrive 0-10V, ELV, TRIAC, and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant.

PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, Duo (tunable white), Quadro (RGBW) emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

ELECTRICAL SECTION OPTIONS

Electrical section options are available for fixtures specified as multi circuit (#MC). With MC, specify the total number of circuits (#), including any circuits required for optional electrical sections. A drawing is required to specify the layout. Please consult factory for custom configurations.

Electrical sections

Options include emergency-powered (#EC##), night light (#NL##), daylight (#DL##), and generator transfer device (#GTD##) sections. Specify the quantity (#), as well as the section length in inches (##).

Example 1: A 32' Direct fixture with two 8' emergency-powered sections on a second circuit.
Code: 2MC-2EC96

Example 2: A 24' Direct fixture with one 4' generator transfer device section.
Code: 1MC-1GTD48

Battery

Each emergency battery (#EMB) powers a 4' section. All batteries will be on the same circuit. Specify the number of batteries (#) required.

Factory installed long life, high temperature, maintenance-free Lithium-Ion battery pack with self-test functionality, test switch and charge indicator. Minimum of 90 minutes operation, up to 1000 lumens per 4' (25°C) emergency lighting output and recharge time of 24 hours.

MOUNTING OPTIONS

Recessed fixtures can be mounted into exposed or concealed T-bar or tegular ceiling, as well as in drywall ceilings with trim, trimless, or mud flange options. Via 5 is compatible with 6" Armstrong Techzone™ & USG ceilings.

FINISH

Interior - 95%, reflective matte powder coated white paint

Exterior - Matte white or matte black powder coating. Custom finishes are also available.

CONTROLS

Lumenwerx offers several options for integrating occupancy and daylight harvesting controls in our luminaires.

For latest information on sensors, click [here](#).



STANDALONE CONTROLS

An integrated standalone sensor controls the luminaire in which it is installed. Depending on the length, more than one sensor may be necessary and may control the entire luminaire, or just a section of it. These controls operate independently. Unless otherwise agreed, sensor location, blank size, and functionality of the sensor within the luminaire are selected by Lumenwerx. See client drawings for details.

Three types are available:

OMS: An integral Passive InfraRed (PIR) sensor turns luminaires on and off automatically with field-adjustable time out period. No wall control is used. Coverage pattern for large motion has a 12' diameter with the sensor mounted 8' above the floor; for small motion, the pattern has an 8' diameter. Typically, one sensor is required for every 10' of a continuous luminaire run.

ODS: An integral, daylight harvesting sensor with closed-loop operation dims the luminaire in which it is installed in order to compensate for available daylight. The sensor measures the combination of daylight and luminaire light reflected from horizontal surfaces below the luminaire. Initial onsite calibration is required via the use of provided remote control.

OCS: Both an occupancy and a daylight sensor are installed in the luminaire.

VIA 5 RECESSED PATTERN



DIRECT
STATIC WHITE, BIOS

CONNECTED CONTROLS

With connected controls, sensors or nodes installed in the luminaire form part of a larger control system infrastructure from manufacturers such as: Lutron, Enlighted, Encelium, Cooper Wavelinx, Acuity nLight, Casambi, Legrand, and others. These connected controls allow for a scalable system providing features like occupancy and daylight control, manual control, scheduling and configuration of various zones and scenes. Energy reporting and system monitoring are also possible. Specific capabilities depend on the control system being used.

Lumenwerx installs the components (sensors, nodes, power packs, etc) which may be supplied to us by a third party, or procured directly by Lumenwerx, depending on the control system manufacturer.

Lumenwerx is solely responsible for the installation of specified components; the controls manufacturer is responsible for performance of the control system.

To indicate a Lumenwerx luminaire with connected controls, identify the specific onsite control system to be integrated into the luminaires using the ordering code. Due to the diversity of components, you must contact factory to assure complete compatibility with intended control system and to fully specify the luminaire.


Complete control specifications, sensor/node/power pack layout, and narrative for the control system are required for Lumenwerx to create shop drawings and submittals.

COB

Fixtures with Chip On Board (COB) technology are able to provide a maximum output of 1800 lumens from a discrete 50 mm aperture on 8 inch centers. Standard CRI is 80, for 90 and 97 CRI with elevated R9 values, please consult factory. Standard 20°, 30° and 40° beam angles are available, as are custom angles prior factory approval. All our Chip On Board products have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 50 000 hours.



Chip On Board (COB)



CONSTRUCTION

Housing - Extruded aluminum, up to 90% recycled content

Interior brackets - Die-formed cold rolled sheet steel

Joining system - Die-cast zinc

Reflectors - Die-formed cold rolled steel, 95% reflective matte white painted

Lens - Acrylic

Drop lens - Extruded with glued end caps

Mud flange - Extruded aluminum, up to 90% recycled content

Slip-through bracket - Die-formed galvanized sheet

End plate - Die-formed cold rolled sheet steel

CERTIFICATIONS

ETL - Rated for Indoor Dry/Damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

Chicago Plenum - City of Chicago Approved (CCEA)

IC rated - Suitable for direct contact with insulation.

WARRANTY

Lumenwerx provides a five-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.