


VIA WET FLUORESCENT

WALL MOUNT - INSTALLATION


NOTE: Wire dimming conductors as Class 1

1 SINGLE FIXTURE

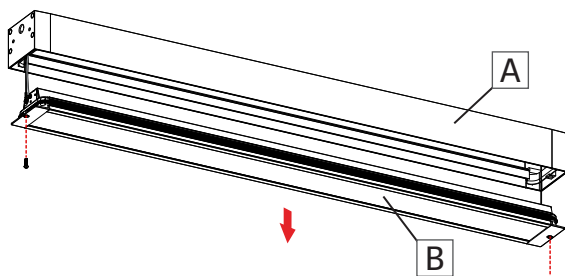


Make sure the power to the fixture (A) is turned off. Unscrew and lower the lens frame (B) retained by security cables. **Fixture must be installed with lens facing down.**

2

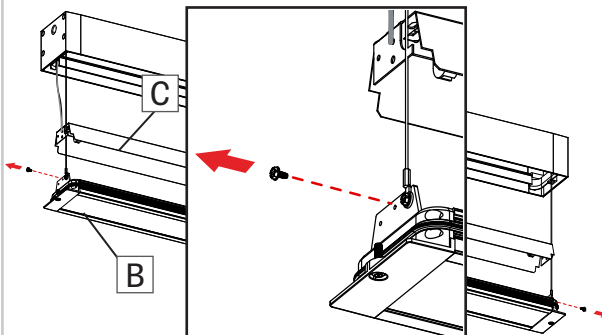


Unscrew the reflector (C) from both side of the lens frame (B) and delicately lift it.

3

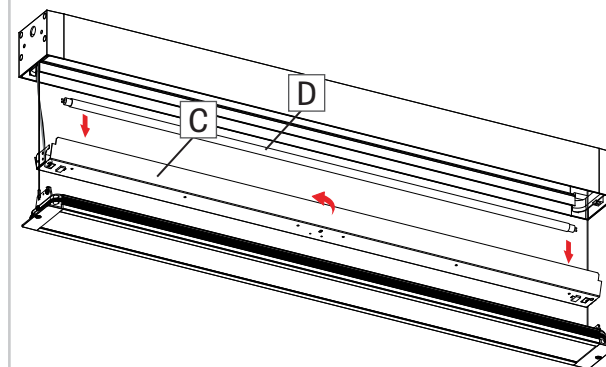


Rotate the reflector (C) and install the lamp (D).

4

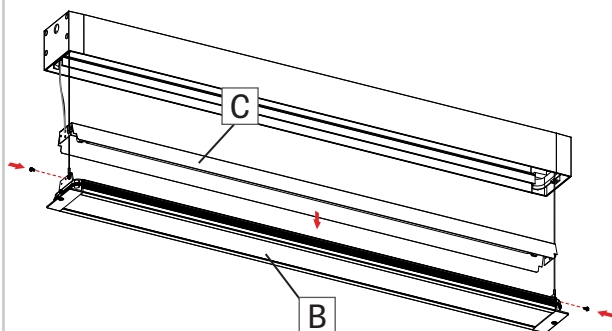


Screw the reflector (C) back on the lens frame (B).

5

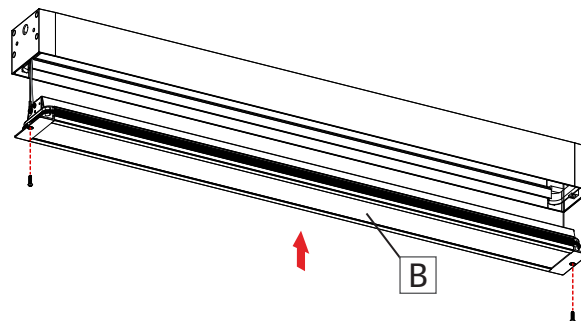

Screw back in place the lens frame (B) making sure not pinching the security cables on the sides.

6

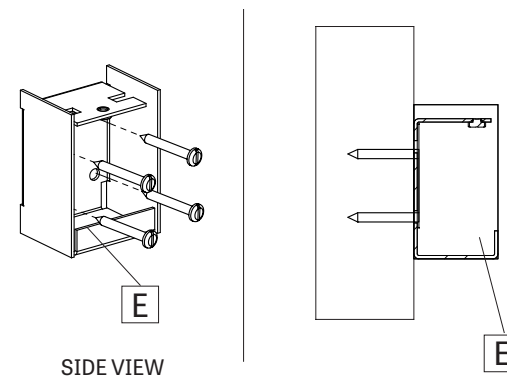


Locate wall bracket position using provided client drawing. Install wall brackets (E) to wall.

VIA WET FLUORESCENT


WALL MOUNT - INSTALLATION

7

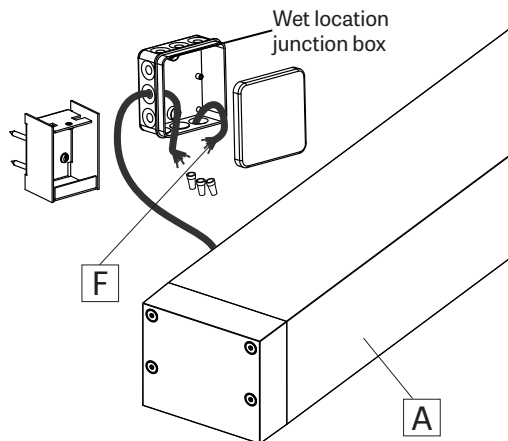

Make wire connection between fixture (A) and wall power cable (F).


8

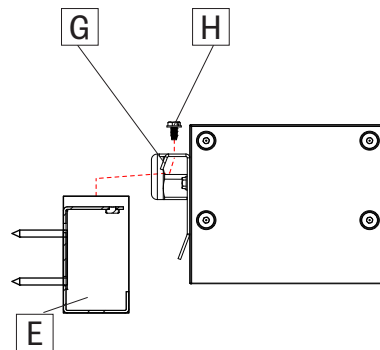

Insert fixture brackets (G) into wall brackets (E), and secure in place with supplied screws (H).


9

CONTINUOUS SYSTEM

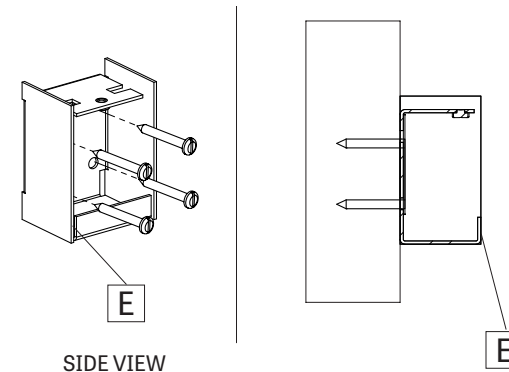


Locate wall bracket position for all fixtures using provided client drawing. Install wall brackets (E) to wall.

10

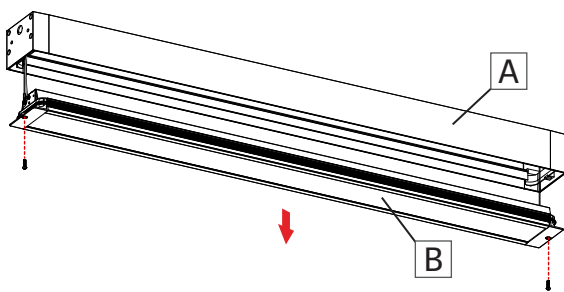


Unscrew and lower the lens frame (B) retained by security cables.

11

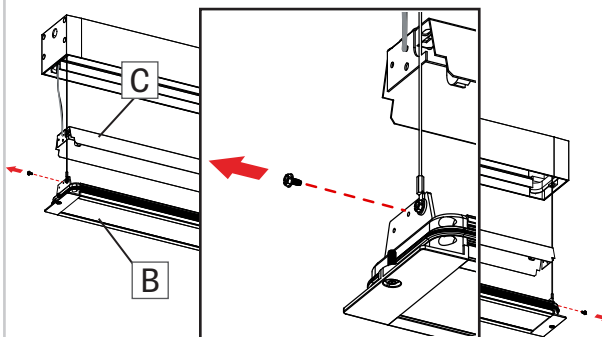

Unscrew the reflector (C) from both side of the lens frame (B) and delicately lift it.

12

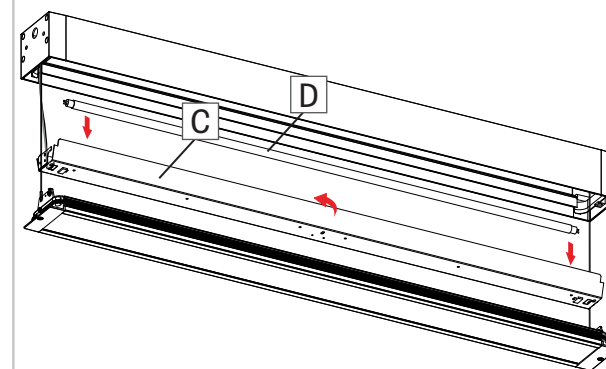


Rotate the reflector (C) and install the lamp (D).

VIA WET FLUORESCENT


WALL MOUNT - INSTALLATION

13

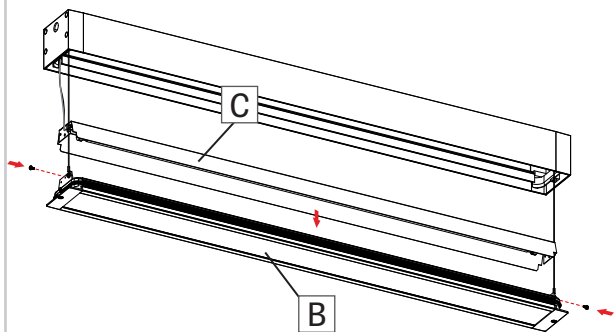


Screw the reflector (C) back on the lens frame (B). Repeat steps 10 to 13 for all fixtures in the run.

14

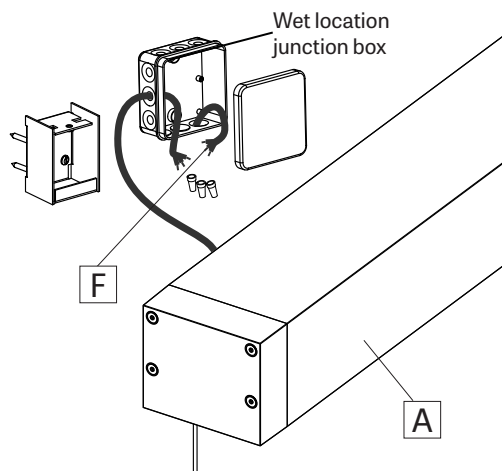


Make wire connection between the first fixture (A) and wall power cable (F).

15

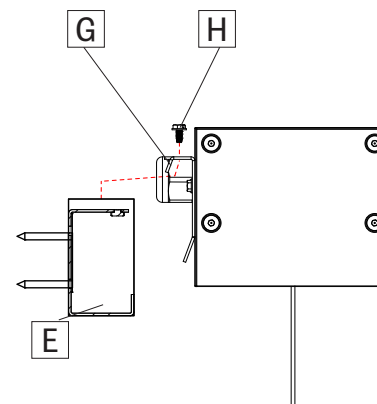


Insert the first fixture brackets (G) into wall brackets (E), and secure in place with supplied screws (H).

16

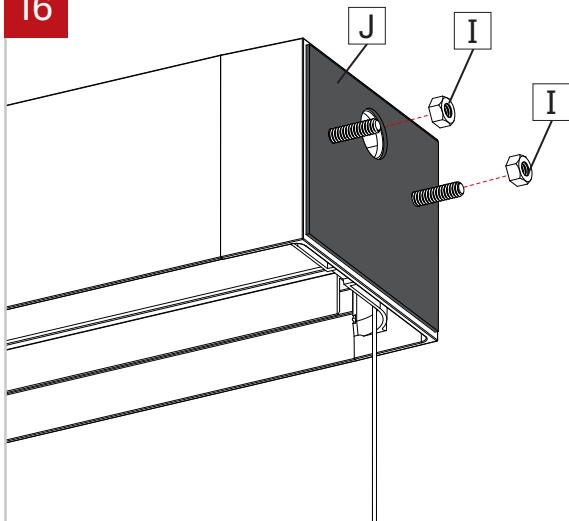


Unscrew and remove nuts (I) on the outside of the joiner (J). Put the nuts (I) in a safe place.

17

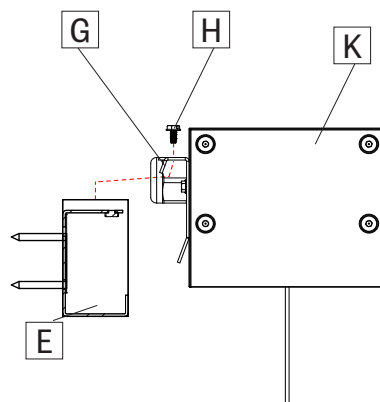

Push the wires inside the first fixture through the end cap holes. Align the second fixture (K) to the screws of the joiner of the first fixture. Insert the second fixture brackets (G) into wall brackets (E), and secure in place with supplied screws (H).

18

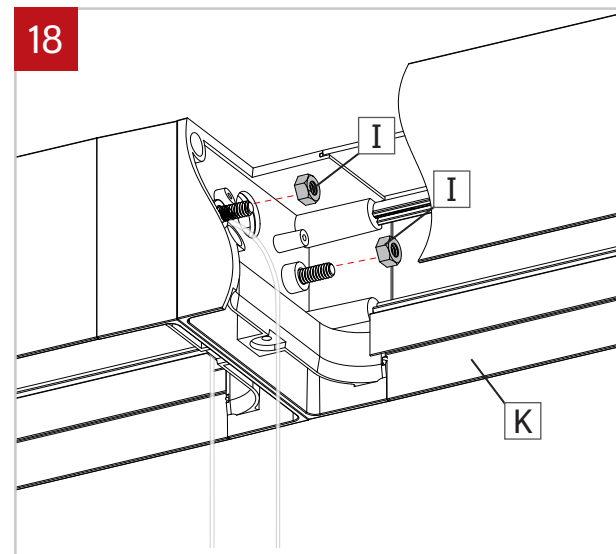

Reinstall the nuts (I) inside the second fixture (K) on the joiner to secure it.

VIA WET FLUORESCENT

WALL MOUNT - INSTALLATION

