



**NOTE:** Wire dimming conductors as Class 1

1

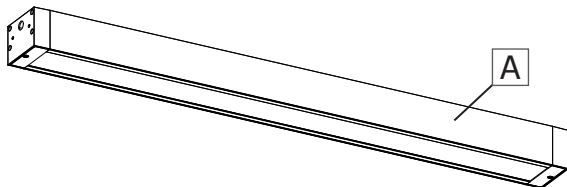


Make sure the power to the fixture (A) is turned off.

2

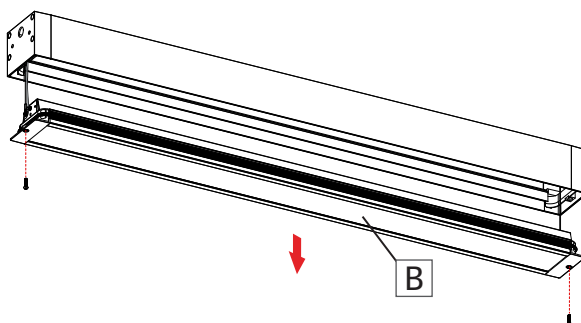


Unscrew and lower the lens frame (B) retained by security cables.

3

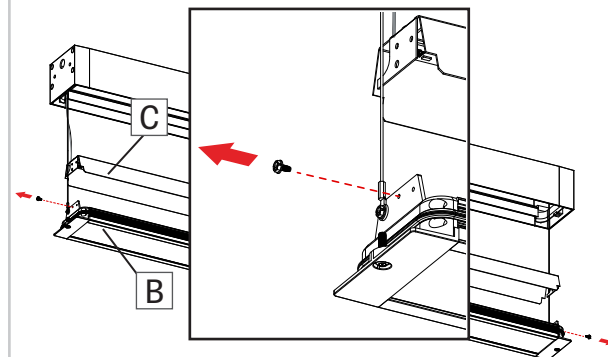


Unscrew the cartridge (C) from both side of the lens frame (B) and delicately lift it.

4

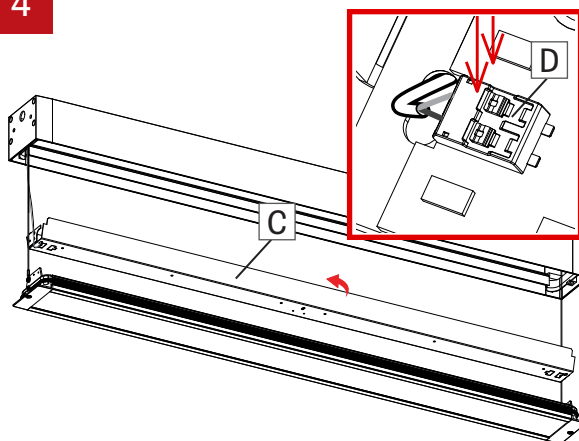


Rotate the cartridge (C) to get acces to the LED moxex connector (D). Disconnect LED moxex connector (D) by taking a pointed object and pressing on the two tabs on the top.

5

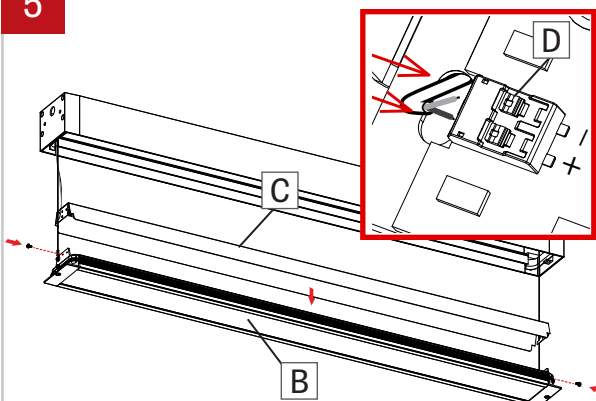

Replace the cartridge (C) and reconnect the LED connector (D). **NOTE: connect white wire into the negative (-) terminal and the black wire into (+) positive terminal** Make sure that the wires are not hiding any LED diode. Screw the cartridge back on the lens frame (B).

6

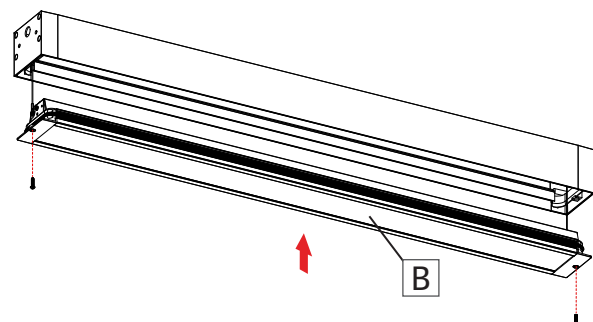

Screw back in place the lens frame (B) making sure not pinching the security cables on the sides.