


VOILÀ SEAL

4" Round Downlight for Healthcare
Fixed/Adjustable



Trim

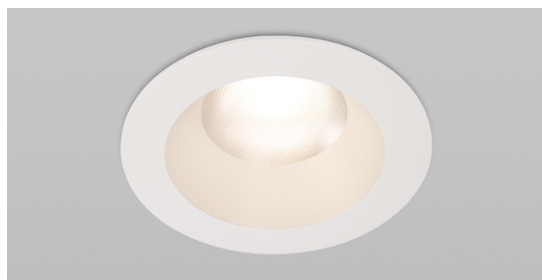

Tamper-resistant Trim

Voila 4" round downlights feature innovative Hyflex™ optics for precise beam control. Shallow construction requires only 4" recess depth. Driver can be replaced through 2" aperture. The Voila COB source with 90 CRI and 2-step color consistency matches other Lumenwerx luminaires, and is available with Chromawerx SOLA (dim-to-warm) and DUO (tunable white), as well as emergency option. Complete Voila offering includes 2" and 4" apertures; downlights, adjustables, and wall washers; round and square trim; and cylinders; see separate specifications.

Performance

LUMEN OUTPUT ¹	WATTS	EFFICACY LM/W
1501 lm	14 W	107 lm/W
2037 lm	20 W	102 lm/W
2744 lm	28 W	98 lm/W

¹ Lumens packages are assuming 3500K, 80CRI, 30° beam, round white baffle

Delivered Lumens for Round White Standard Baffles at 35K

CRI	90 CRI							
BEAM	10	20	30	40	50	60	75	90
Low - 13.8 W	1257	1203	1410	1424	1379	1363	1333	1302
Medium - 19.7 W	1576	1508	1912	1933	1871	1849	1808	1766
High - 28 W	1932	1848	2576	2604	2520	2492	2436	2380

LUMENWERX

Project: _____

Type: _____



IP54



Aperture Size

4.00"

Configurations



Fixed, adjustable

Baffle Depth



Standard 1.00"

Trim



Baffle & Finishes

Textured matte white



Textured matte black



Custom RAL



Color Temperature

2700K



3000K



3500K



4000K



SOLA



DUO



Delivered 1294-2800 lm

14-28 Watts, up to 111 lm/W

Integral & Remote Drivers

0-10V, TRIAC, ELV, eldoLED & Lutron

Emergency battery pack

VOILÀ SEAL

4" Round Downlight for Healthcare
Fixed/Adjustable

LUMENWERX

Project: _____

Type: _____

1 - Housing (Example: VOSEAL4RR-GKT-SW-OF-ASB-120-14W-D1)

Product Specification

LUMINAIRE ID	TRIM STYLE	LIGHT SOURCE	INSTALLATION TYPE	MOUNTING OPTIONS	VOLTAGE	WATTAGE (80 CRI) ³	DIMMING			
VOSEAL4RR										
VOSEAL4RR - Voila Seal 4" Round Recessed	GKT - Gasketed trim TRT - Tamper-resistant trim GTT - Gasketed and tamper-resistant trim	SW - Static white	OF - Open frame type non-IC IC ¹ - IC rated CP ¹ - Chicago Plenum type-IC (CCEA) ¹ IC/CP with low output only.	ACB - Adjustable commercial bar hangers (grid and drywall) ASB - Adjustable standard bar hangers (grid and drywall) FMB - Flush mount bars (drywall only) AHC - Adjustable hat channel bars	120 - 120V 277 - 277V UNV - 120V-277V 347 ² - 347V ² Available with 0-10V dimming options D1, RD1, and RSD1 only. Consult factory for details.	14W - Low output 1294-1532 lm 20W ⁴ - Medium output 1623-2078 lm 28W ⁴ - High output 1988-2800 lm For other lumen packages, consult factory.	INTEGRAL		REMOTE	
								D1 - 1% 0-10V ELV ⁵ - ELV 120V TRI ⁵ - TRIAC 120V LDE1 ^{6,7} - Lutron Hi-lume 1% Eco DA ^{6,7} - DALI ELDO ⁶ - eldoLED 0.1% ELD1 ⁶ - eldoLED 1% DEB ⁸ - 0-10V with onboard emergency battery backup	RD1 - 1% 0-10V RELV ⁹ - ELV 120V RTRI ⁹ - TRIAC 120V RLDE1 ¹⁰ - Lutron Hi-lume 1% Eco RDA ¹⁰ - DALI RELD0 - eldoLED 0.1% RELD1 - eldoLED 1%	+EB ¹¹ - Emergency battery ¹¹ Specify with remote dimming only. The code will be like the following example: RD1 + EB.
		SOLA - Dim-to-warm DUO - Tunable white						SOLA SD1 - Single 0-10V input DUO LD2 ^{7,8} - Lutron DALI- 2 digital	SOLA RSD1 - Single 0-10V input DUO RDMX ¹⁰ - To specify, see pages 7 to 9 RDDA ¹⁰ - DALI RDD1 - Dual 0-10V input for CCT/intensity RLD2 ¹⁰ - Lutron DALI- 2 digital	
						³ For delivered lumens and other CRI, see multiplier tables on page 3. ⁴ Available with OF housing only.	⁵ Available with 120V only. ⁶ Not available with CP installation type. ⁷ On-site commissioning is required. ⁸ Available with OF housing only.	⁹ Available with 120V only. ¹⁰ On-site commissioning is required.		

2 - Light (Example: VO4-SW-10-2-CRI90-27-LS)

LUMINAIRE ID	LIGHT SOURCE	BEAM	COLOR QUALITY	CRI	COLOR TEMP	OPTION
VO4						
VO4 - Voila 4"	SW - Static white SOLA - Dim-to-warm DUO - Tunable white	10 - 10° Narrow spot 20 - 20° Spot	2 - 2 Step MacAdam Ellipse 3 - 3 Step MacAdam Ellipse	90 - 90 CRI 80 - 80 CRI 97 - 97 CRI (not available for 3500K)	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K	LS ¹⁴ - Linear spread HEX ^{14,15} - Hex louver NA - None ¹⁴ Hex louver & linear spread cannot be combined together. ¹⁵ Not available with 60°/75°/90° beam options.
		30 - 30° Narrow flood 40 - 40° Flood 50 - 50° Wide flood 60 - 60° Very wide flood 75 - 75° Very wide flood 90 - 90° Open flood				
		¹² Available with low output only. ¹³ Available with high output only.				

3 - Baffle (Example: VOSEAL4RRB-GKT-SDL-SR-TMW)

LUMINAIRE ID	TRIM STYLE ¹⁶	LENS	BAFFLE POSITION	TRIM FLANGE FINISH
VOSEAL4RRB			SR	
VOSEAL4RRB - Voila Seal 4" Round Recessed Baffle	GKT - Gasketed trim TRT - Tamper-resistant trim GTT - Gasketed and tamper-resistant trim ¹⁶ IP54 rated for bathrooms, showers, outdoor canopies, and marquees when specified with gasketed trim (GKT) and gasketed and tamper-resistant trim (GTT) options.	SDL - Soft diffused lens FDL - Frosted diffused lens	SR - Standard regress	TMW - Textured matte white TMB - Textured matte black WA - White antimicrobial Silverwerx CF# - Custom finish specify RAL# (e.g. CF1028)




VOILÀ SEAL

4" Round Downlight for Healthcare
Fixed/Adjustable

LUMENWERX

Photometrics

Please follow the multiplier tables to ensure correct lumen value. Beams, baffles, lensing, CCT, CRI, baffle shape and accessories will change the lumen value.

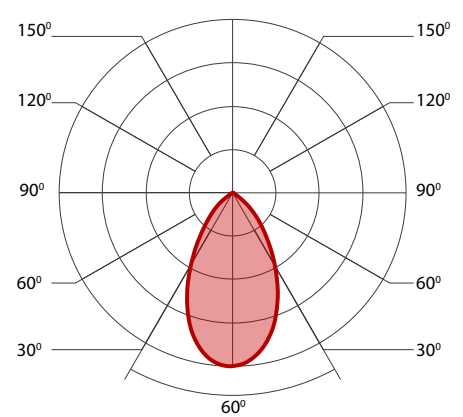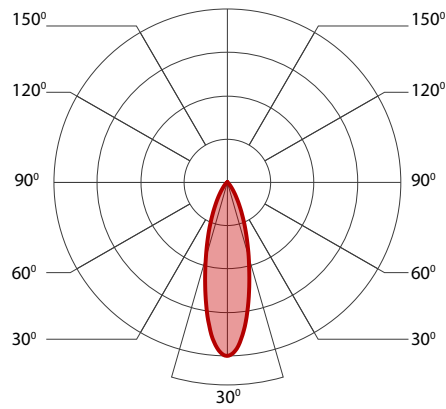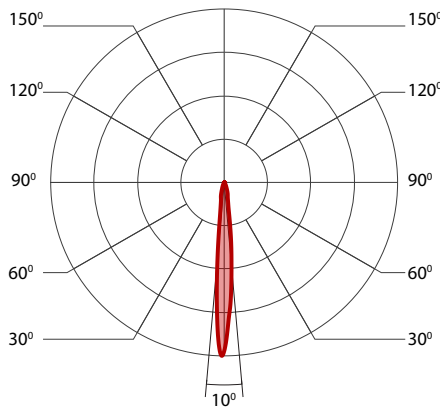

Delivered Lumens for Round White Standard Baffles - At 35K

CRI		80 CRI								90 CRI							
BEAM	10	20	30	40	50	60	75	90	10	20	30	40	50	60	75	90	
Low - 13.8 W	1348	1294	1501	1532	1475	1455	1424	1394	1257	1203	1410	1424	1379	1363	1333	1302	
Medium - 19.7 W	1692	1623	2037	2078	1995	1975	1933	1892	1576	1508	1912	1933	1871	1849	1808	1766	
High - 28 W	2072	1988	2744	2800	2688	2660	2604	2548	1932	1848	2576	2604	2520	2492	2436	2380	

Delivered Lumens - At 30K

97 CRI								
BEAM	10	20	30	40	50	60	75	90
Low - 13.8 W	1080	1053	1213	1225	1186	1172	1146	1120
Medium - 19.7 W	1355	1297	1644	1663	1609	1590	1555	1519
High - 28 W	1820	1736	2212	2122	2156	2128	2100	2044

Efficacy Based on Delivered Lumens - High 28 W

LPW								
BEAM	10	20	30	40	50	60	75	90
80 CRI	74	71	98	100	96	95	93	91
90 CRI	69	66	92	93	90	89	87	85
97 CRI	65	62	79	79	77	76	75	73

SOLA and DUO Max Wattage

90 CRI								
BEAM	10	20	30	40	50	60	75	90
DUO	NA	10	NA	19	19	19	19	19
SOLA	NA	19	NA	26	26	26	26	26

Multiplier - CCT

CCT	
2700K	0.9
3000K	0.95
3500K	1
4000K	1.05

Multiplier - Baffle Color and Shape

BAFFLE VARIABLES		
White	Round standard	1
White	Square standard	0.89
Black	Round standard	0.95
Black	Square standard	0.87

Multiplier - Optical Options

LENS AND LOUVERS	
No lens	1
Soft diffused lens	0.94
Frosted lens	0.78
Hex louvers	0.82

For SOLA and DUO, please consult factory.

VOILÀ SEAL

4" Round Downlight for Healthcare
Fixed/Adjustable

LUMENWERX

Technical Specification

DESCRIPTION Compact fixed or adjustable 4" downlight with multiple outputs, color, beam, and dimming options.

HOUSING CONSTRUCTION For new construction, 20 gauge powder coated steel. Open frame, type-IC, or Chicago Plenum (CCEA) rated. 18 gauge galvanized steel junction box with ½" trade size knockouts. Adjustable hanger bars and butterfly brackets are included. Hat channel and flush mounted brackets are also available.

Clearance Height: Open frame/Type-IC/Chicago Plenum: 4";
Open frame with DEB or PSQ0 (Duo) options: 8"

Ceiling Thickness: Can accommodate ½" to 1"

Housing weight: Type-IC/Chicago Plenum - 8 lbs -3.6 kg

Open Frame - 6 lbs -2.7 kg

Ceiling cut out: Ø5 ⅝" for round, 4 ⅜"x4 ⅜" for square

FIELD REPLACEABLE LIGHT ELEMENT

Adjustability: Hot aiming, lockable, 360° rotation and 30° vertical tilt with shift to ensure beam stays centered.

LED Module: Integral COB module. 90 CRI and 2 SDCM, Standard with options of 80 CRI, or 97 CRI. L80 > 60,000 hours

Light Output: From 1294-2800 lumens

HyFlex™ Optics: Proprietary TIR/reflector with field interchangeable beam smoothing lenses.

Optical Accessories: Linear spread lens and hex cell louver can accommodate up to two in the light element.

Thermal Management: Cold-forged aluminum heat sink to maximize thermal dissipation.

BAFFLE Round die-cast aluminum retained with spring clips.

Trim options: Round gasketed, tamper-resistant, or gasketed and tamper-resistant trim

CHROMAWERX SOLA (dim-to-warm) and DUO (tunable white). See page 6 for more information.

ELECTRICAL

Integral: 0-10V, ELV, TRIAC, Lutron Hi-Lume EcoSystem, DALI, eldoLED 0.1%, eldoLED 1%, Lutron DALI-2 digital.

Remote: 0-10V, ELV, TRIAC, Lutron Hi-Lume EcoSystem, DALI, eldoLED 0.1%, eldoLED 1%, DMX, Lutron DALI-2 digital.

Emergency Options: Emergency battery back-up options are available as integral (Fulham), or remote (Fulham, Bodine, or IOTA). The battery provides 10W of power.


ENVIRONMENT Ambient temperature at fixture location shall be within 0°C/32°F - 25°C/77°F, indoor dry or damp as well as outdoor damp use (canopies or marquees).

LISTING cETLus listed to UL 1598 and CAN/CSA Standard C22.2 No. 250.0. IP54 rated for bathrooms, showers, outdoor canopies, and marquees when specified with gasketed trim (GKT) and gasketed and tamper-resistant trim (GTT) options.


WARRANTY 5 year limited warranty on LED module and power supply. Guaranteed to maintain 70% lumen maintenance.

Installation Types


Open Frame

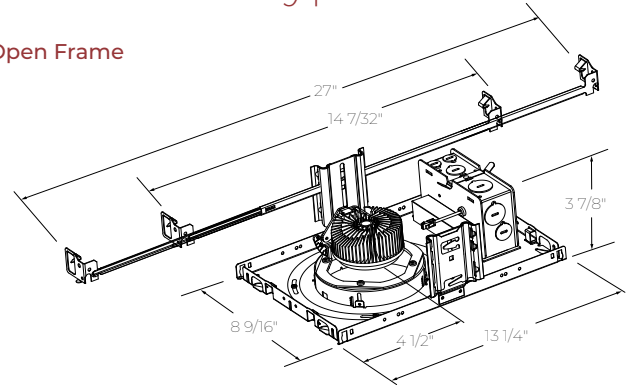


Type-IC / Chicago Plenum

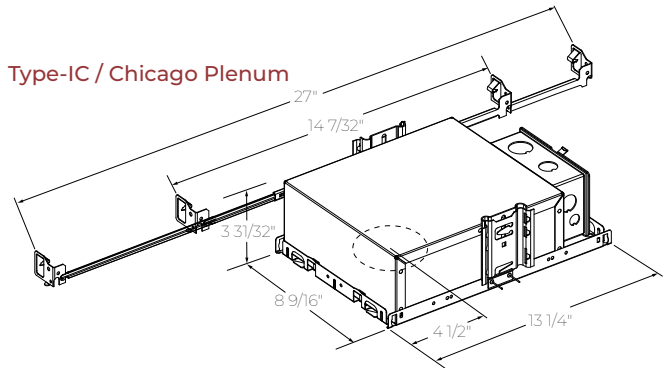


Mounting Options




ACB - Adjustable Commercial Bar Hangers



ASB - Adjustable Standard Bar Hangers



FMB - Flush Mount Bars




AHC - Adjustable Hat Channel Bars

VOILÀ SEAL

4" Round Downlight for Healthcare
Fixed/Adjustable


LUMENWERX

Light

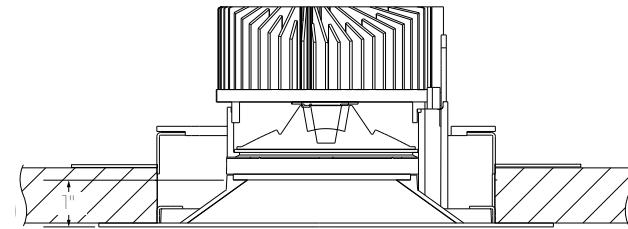


Collar

Internal adjustable collar

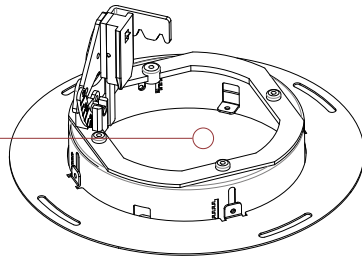


Collar Adapter




Lens

Soft Diffused
Frosted Diffused




Lens Holder and Spring Clips




Trim Gasket

Available for gasketed (GKT)
and gasketed and tamper-resistant
(GTT) trim options.




Baffle - Trim

Standard Regress Baffle
Trim and Tamper-resistant Trim



Optics

Hyflex™ optics provide precise optical control in a remarkably compact form. The core of this four-tier system is a compound reflector with a central TIR element, just 1.06" deep. Beam smoothing discs perfect beam angles up to 90°. Beam angles are easily interchanged in the field.




Adjustability

Adjustable Light Element rotates 360° and tilts up to 30°. Screw thread mechanism provides easy tilt adjustment, fixes the aiming angle, and is accessed by removing aperture trim (see below). Supporting collar allows ceilings from ½" to 1" thick.

Light Source - LED

Compact COB (Chip-On-Board) LED module, available in 2700K, 3000K, 3500K and 4000K with a choice of 80 CRI or 90 CRI with elevated R9 value (for 97 CRI, consult factory). Color consistency is maintained to within 2 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

Beam Angles

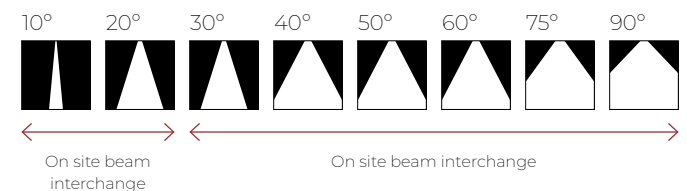

Options



Linear Spread



Hex Louvers

VOILÀ SEAL

4" Round Downlight for Healthcare
Fixed/Adjustable

LUMENWERX

Integral Driver

Unless otherwise specified, Voila comes standard with an integral, 120-277VAC/60Hz, electronic, 1% 0-10V dimming, constant-current LED driver. The driver is field replaceable and features a high power factor, low THD and sources 1 mA on the 0-10V dim line. All integral drivers are located inside the housing and are easily accessible from below the ceiling through the aperture. All dimming drivers comply with IEEE C62.41 surge protection requirements.


Emergency Integral

Factory installed, long-life, high-temperature, LED driver with integrated emergency backup using a recyclable LiFePO4 battery pack. Features a remote test switch with charge indicator, minimum of 90 minutes operation and 10W per downlight emergency lighting output. Recharge time of 12 hours.

Emergency Remote

Long-life, high-temperature, emergency LED driver with Lithium Ion battery pack. Features a test switch with charge indicator, minimum of 90 minutes operation and 10W per downlight emergency lighting output. Recharge time of 24 hours.

Trim Dimensions

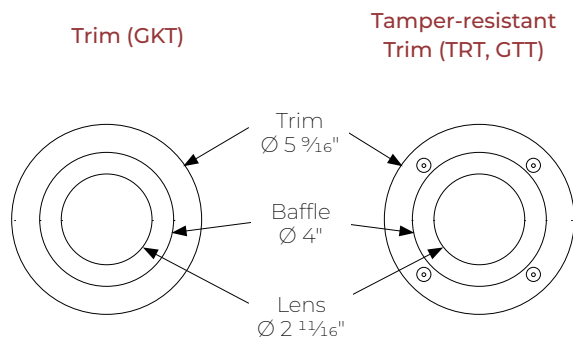


Baffle



Standard Regress

Trim



Black Trim



White Trim



Chromawerx SOLA is single-channel control that dims output while warming the color temperature in a pre-determined relationship. A simple analog control adjusts a specially populated LED array to emulate the effect of dimming a filament source.



Chromawerx DUO offers a two-channel control system which uses analog or digital protocols for synchronous control of both warm (2700K) to cool (6500K) LED arrays - maintaining a CRI above 90. The range of color DUO offers is useful for entraining circadian rhythms, stimulating alertness, and compensating for jet lag among other applications. The Chromawerx drivers are programmed to limit maximum light output and power usage across all color temperatures.


VOILÀ SEAL

4" Round Downlight for Healthcare
Fixed/Adjustable

LUMENWERX

DUO GENERIC DMX NETWORK ARCHITECTURE

A qualified DMX integrator is required to assure proper installation and commissioning of the DMX network. **When placing the PO, please provide the contact information of your DMX integrator.**

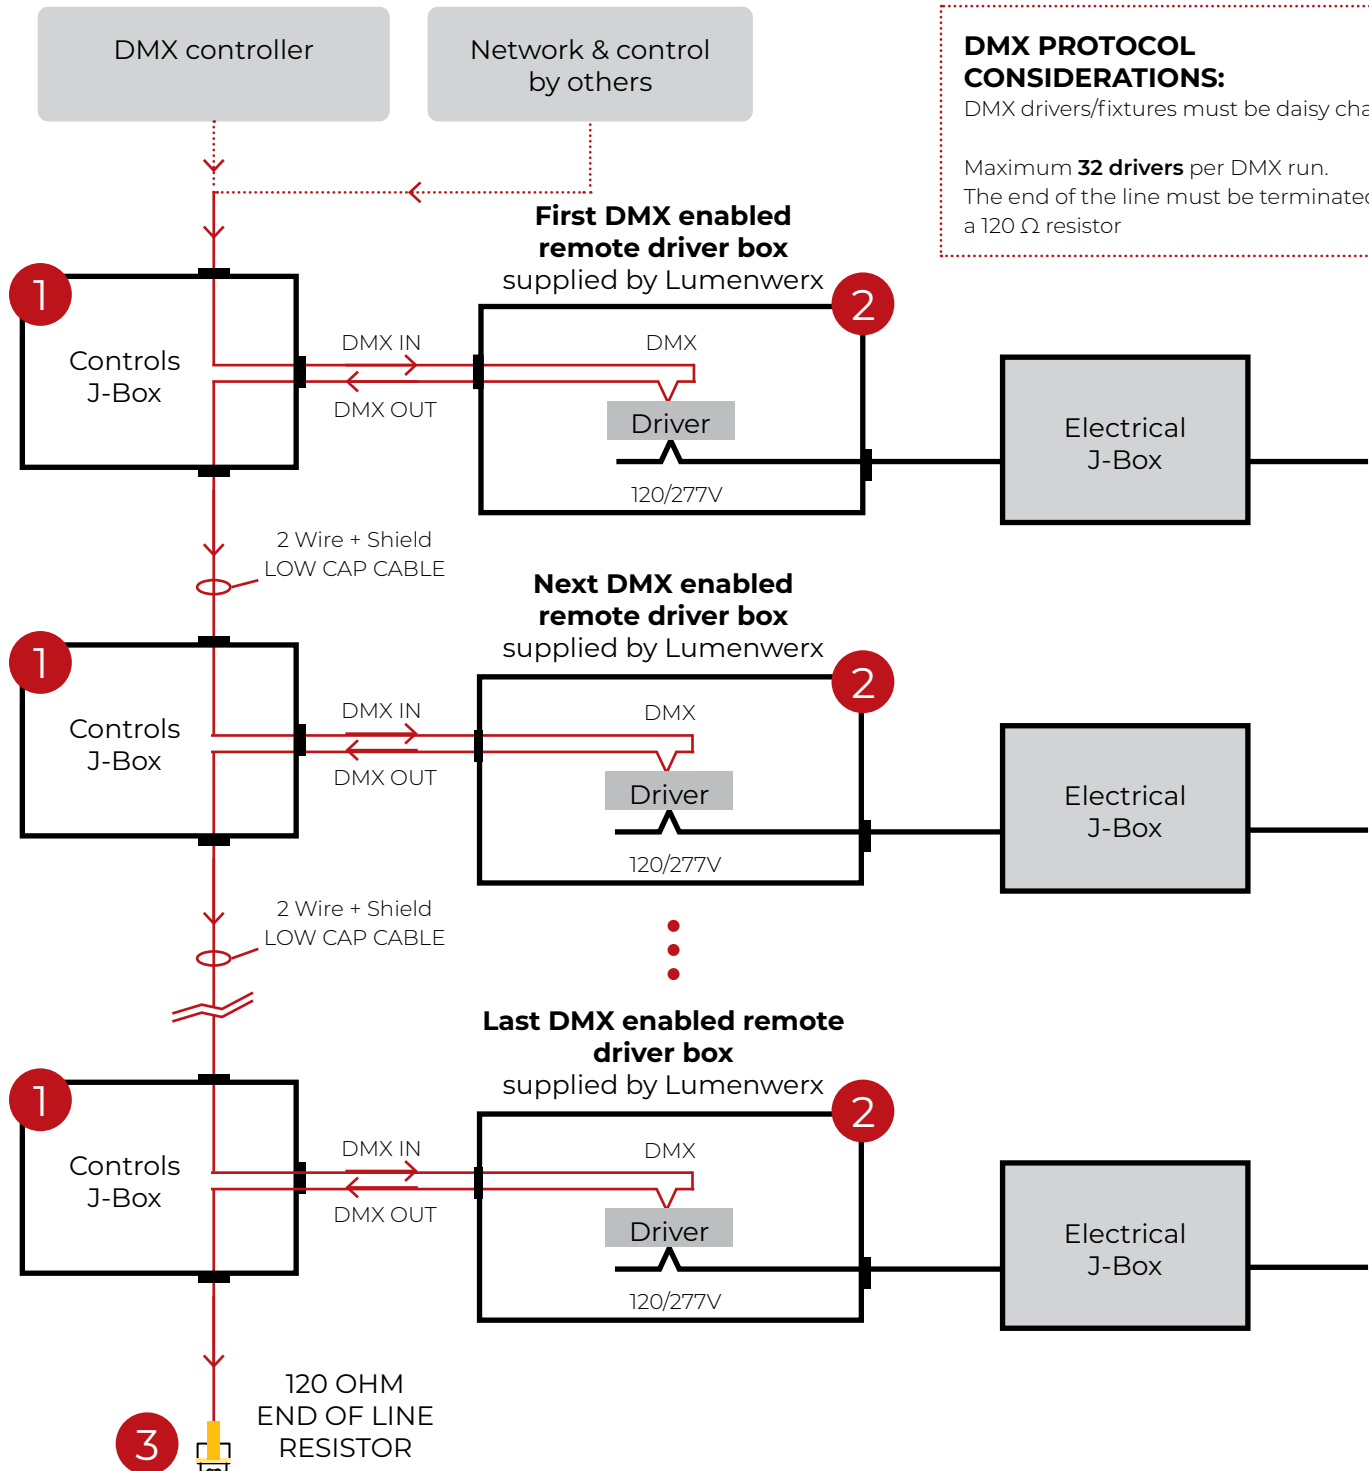


VOILÀ SEAL

4" Round Downlight for Healthcare
Fixed/Adjustable


LUMENWERX

1 J-BOX DMX DAISY CHAIN DETAIL

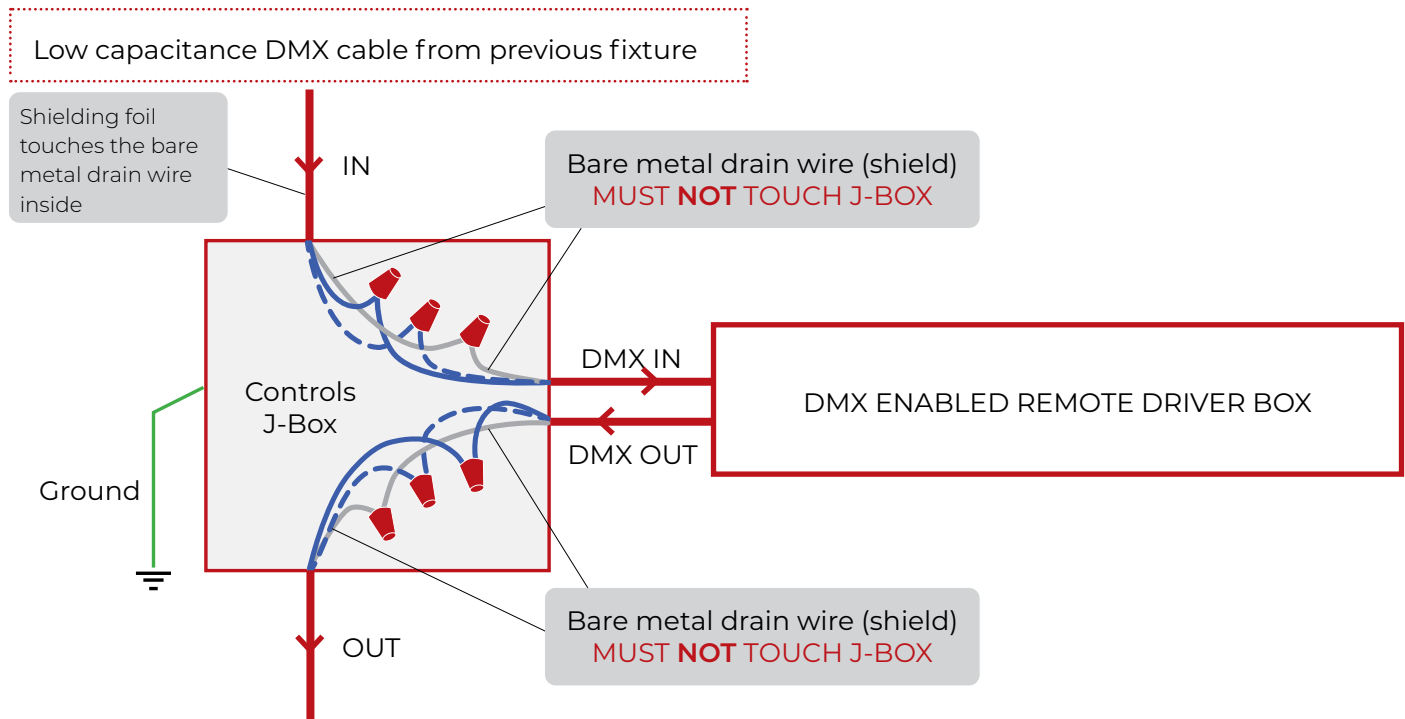

Low capacitance DMX cable to next fixture

2 DMX CONNECTION REMOTE DRIVER

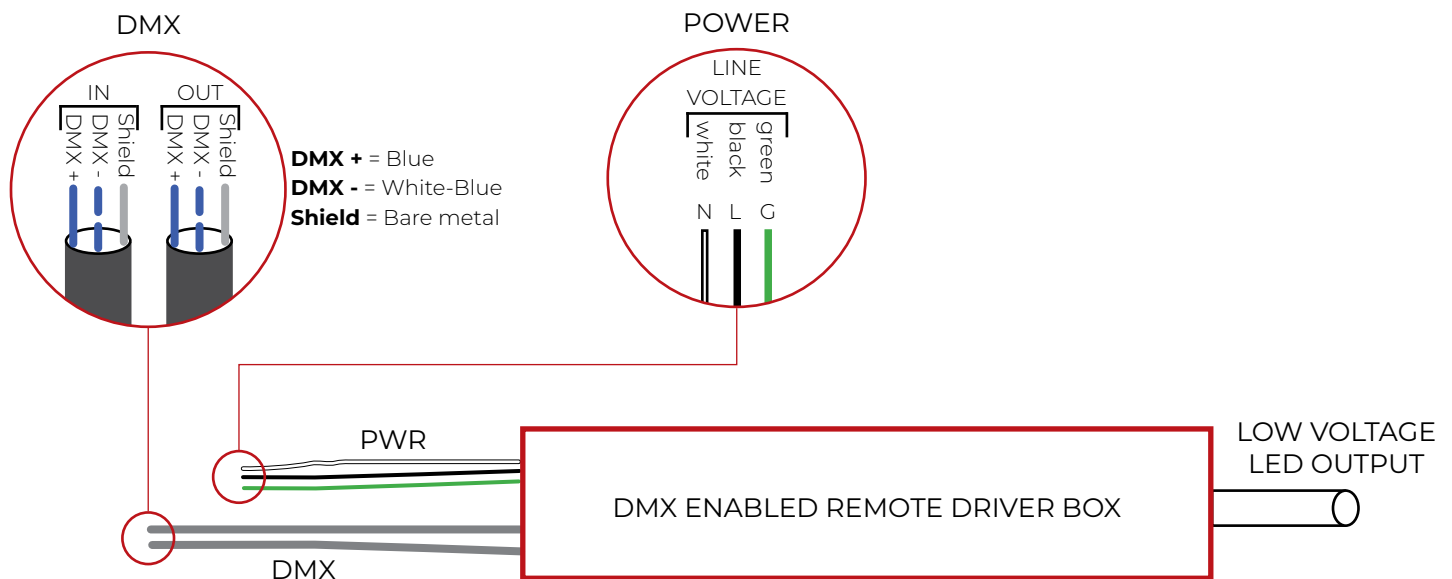

VOILÀ SEAL

4" Round Downlight for Healthcare
Fixed/Adjustable

LUMENWERX

3 LAST DMX CONNECTION DETAIL

