


IMPORTANT: Installation instructions are shown for both side of the fixture, only use the desired side.


NOTE: Wire dimming conductors as Class 1

1

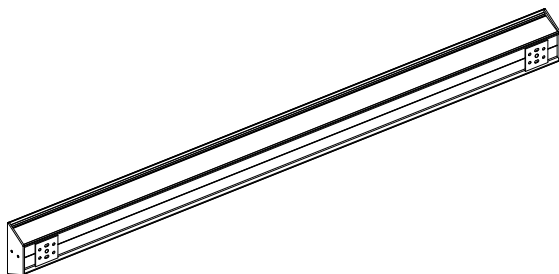


Make sure the power to the fixture is turned off.

2

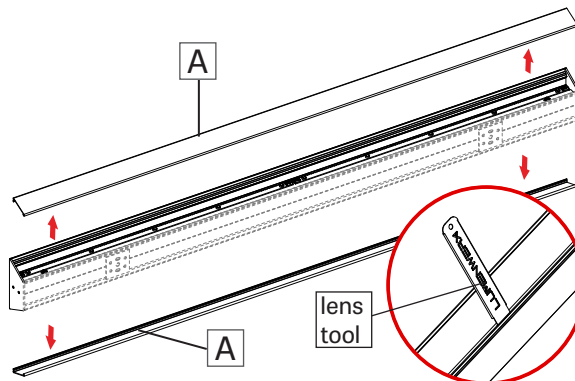


Remove the lenses (A) with the included lens tool.

3

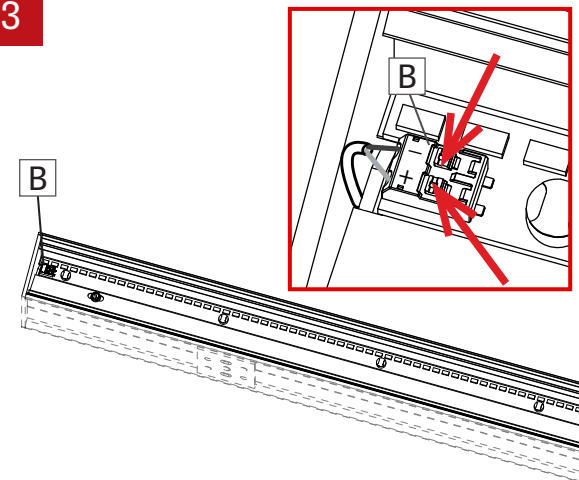


Disconnect LED molex connector (B) by taking a pointed object and pressing on the two tabs on the top.

4

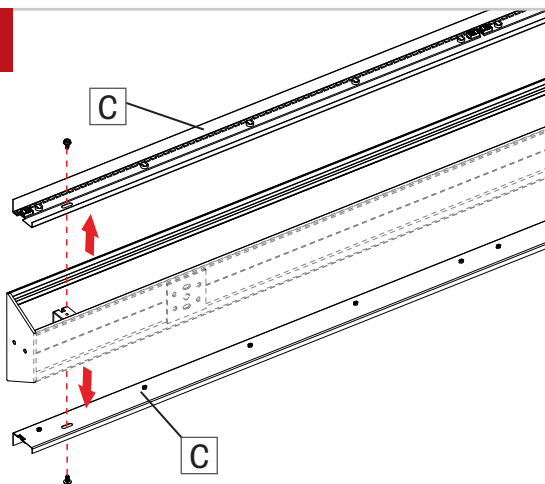


Unscrew the cartridges (C) and remove them from the fixture.

5

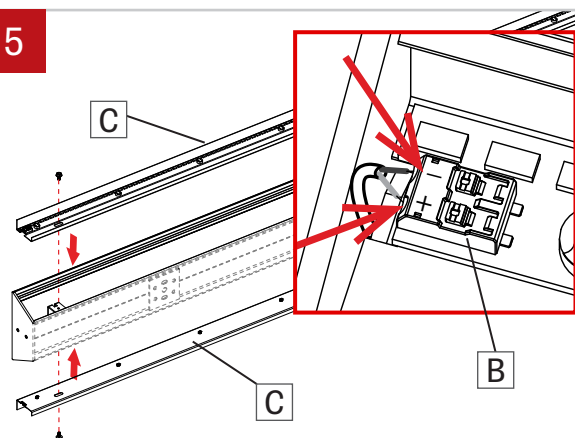

Replace the cartridge(s) (C) and reconnect the LED molex connector (B). **NOTE: connect black wire into the negative (-) terminal and the white wire into (+) positive terminal.** Make sure that the wires are not hiding any LED diode. Screw the cartridge back in place.

6

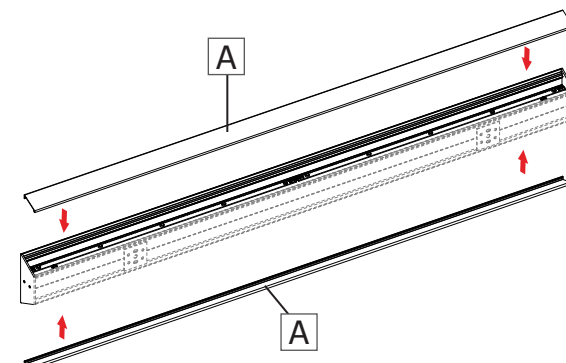

Reinstall the lenses (A).