

Lumenwerx 

Evoq Collection

COVE LIGHTING, SCALED TO THE ARCHITECTURE.





Evoq Collection


Cove lighting, scaled to the architecture.



Three
Models

Plug & Play
Design

Soft & Uniform
Illumination



NEW

Evoq Nano

For the tightest spaces



NEW

Evoq Slim

For shallower coves



Evoq

Maximum design freedom



Evoq Fixture
Asymmetric Wide Optic (AWO)
3000K

Three Embarcadero Center
Location: San Francisco, California, U.S.
Designer: Schuler Shook
Photographer: Jason O'Rear



Declare



EcoSystem
Enabled



Miniwerx
SERIES

Specify Evoq in Three Steps

Meet the Evoq Collection, the adaptable cove lighting system that utilizes cutting-edge technology to offer unparalleled customizability. With its prebuilt cove mounting ramps, the Evoq Collection provides easy solutions for seamlessly integrating cove lighting into a wide variety of interior designs.

1

DEFINE YOUR COVE


- Available Depth & Cove Dimension
- Linear Run or Pattern
- Straight or Curved Configuration



Evoq Nano

Evoq Slim

Evoq

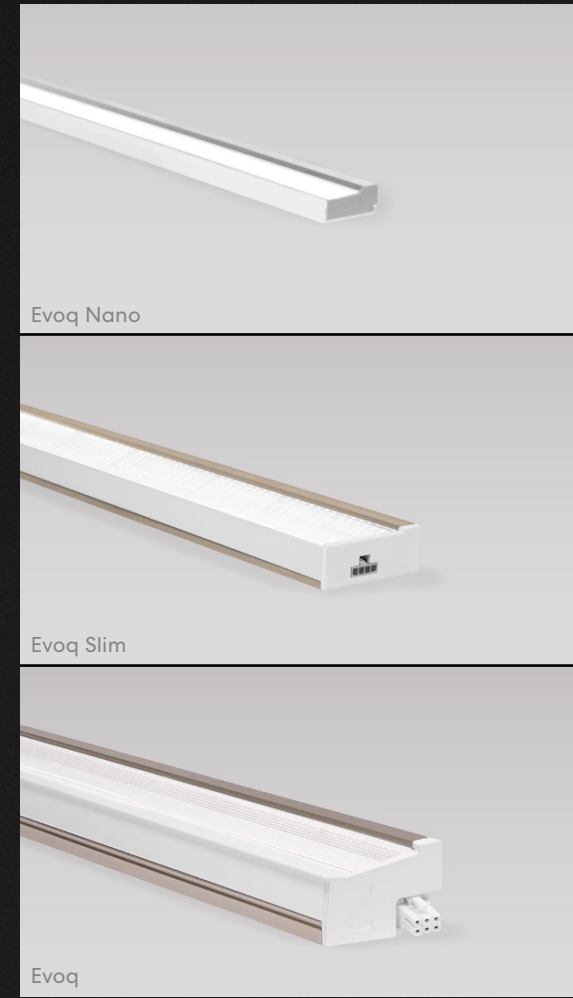

2

CHOOSE YOUR MODEL & PERFORMANCE


- Evoq Nano
- Evoq Slim
- Evoq

3

SELECT YOUR MOUNTING

- 15+ Ramp Profiles
- Field-Curvable Ramps (Evoq only)
- Use Pre-existing Cove



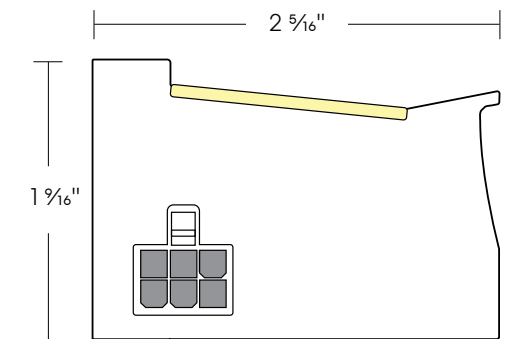

Section View

Evoq

MAXIMUM DESIGN FREEDOM

Evoq fixtures are powerful, delivering up to 1200 lm/ft with outputs ranging from 3W to 12W. Integrated drivers maximize performance while preserving a clean, minimal form. Four optic options—the Asymmetric Narrow Optic (ANO), Asymmetric Wide Optic (AWO), Symmetric Narrow Optic (SNO), and Symmetric Wide Optic (SWO)—provide precise control for a wide range of cove lighting applications. Evoq supports multiple mounting approaches, including Mud-In, Direct Mount, and field-curvable ramp profiles, ensuring compatibility with virtually any architectural cove design. Fixtures can also be installed in existing coves as standalone luminaires or mounted using adjustable brackets and rails.

FIXTURE DIMENSIONS

2 5/16" W × 1 1/16" H

Field-Curvable
Mounting

Linear Runs
& Patterns

Straight & Curved
Configurations

UP TO

1200 lm/ft

MODULE SIZES

12", 18", 48"

12+
Mounting Options

Static White
Dim to Warm (Sola)
Tunable White (Duo)
RGBW (Quadro)


4 PRECISION OPTICS

Asymmetric Optics
Narrow & Wide

Symmetric Optics
Narrow & Wide



0.75"
HEIGHT

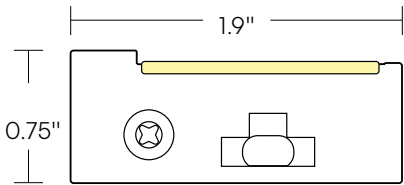

Section View

Evoq Slim

THE OPTICAL CONTROL OF EVOQ, IN A SHALLOWER PROFILE.

Evoq Slim brings the optical control and performance of Evoq into a shallower ¾" profile. With four precision optics, output up to 1000 lm/ft, and a remote driver, it extends the collection into compact cove conditions with high-output capability and broad optical flexibility.



Mud-in Ramp
KE1: Knife Edge 35° Ramp

FIXTURE DIMENSIONS
1.9" W × 0.75" H

4 PRECISION OPTICS
Asymmetric Optics
Narrow & Wide

Symmetric Optics
Narrow & Wide

OUTPUT
350 to
1000 lm/ft

3 MOUNTING OPTIONS
Flat Edge
Mud-in Ramps

Knife Edge 35°
Mud-in Ramps

Standalone Fixture

6" Length
Increments


Remote Driver

Featured Product
Evoq Slim, Patterns, Inside Corners
Mud-in Ramp
FE1: Flat Edge Ramp

Linear Runs
& Patterns

Inside & Outside
Corners

Static White
Dim to Warm (Sola)
Tunable White (Duo)



Section View

Evoq Nano

CONTROLLED LIGHT FOR THE TIGHTEST SPACES

Evoq Nano brings controlled architectural illumination to tight coves and concealed details traditionally served by LED tape. Its ultra-compact profile, dedicated asymmetric optic, remote driver, and 6-inch length increments support precise integration where larger linear systems cannot fit.



FIXTURE DIMENSIONS

1" W × 7/16" H

OPTIC

Nano Asymmetric
Optic

OUTPUT

150 to 500 lm/ft

LIGHT SOURCE

Static White

3 MOUNTING OPTIONS

Flat Edge
Mud-in Ramps

Knife Edge 35°
Mud-in Ramps

Standalone Fixture
with Mounting
Brackets

Linear Runs
& Patterns

Inside & Outside
Corners

6" Length
Increments

Architectural control
in a 1"-wide profile.

Featured Product
Evoq Nano, Patterns, Inside Corners
Nano Asymmetric Optic
Flat Edge Mud-in Ramps



Evoq Fixture
 Evoq, Asymmetric Wide Optic (AWO),
 750 lm/ft, 3500K
Ramp Profile
 CRV2: Curved Ramp Flat Edge,
 Curved Structures

Featured Project
 Owner: LEGO Group
 Architect: BDG Architecture + Design
 Lighting Design: Lux Collaborative
 Construction Management:
 Structure Tone
 Electrical Contractor: J & M Brown
 Company, Inc.




EVOQ & EVOQ SLIM


Optics

Impressive
Ceiling
Uniformity

Precision-
Engineered
Optic Design

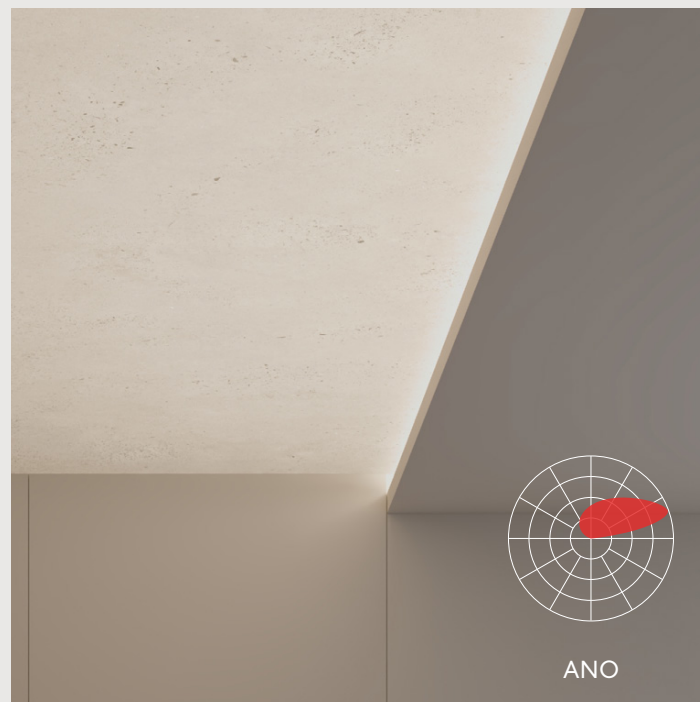

ANO

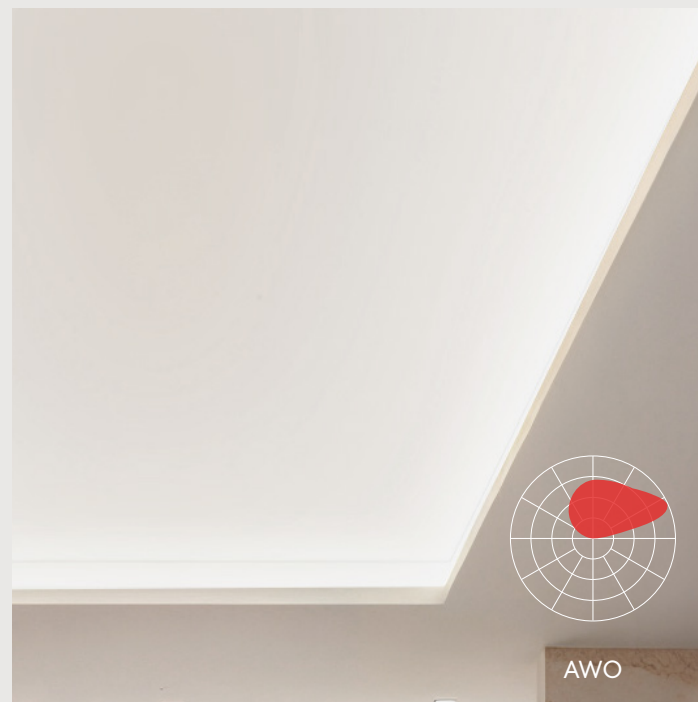

AWO

Asymmetric Narrow Optic


Our Asymmetric Narrow Optic (ANO) is designed specifically for shallow coves with optimal performance achieved with fixture placement at 6"-12" from the ceiling. Its precise projection of light along ceilings and walls is evenly distributed with a soft, homogeneous gradient effect. The ANO peak intensity angle from nadir is at 110°, making it a true asymmetric optic that directs the light where it is intended.

Asymmetric Wide Optic


The Asymmetric Wide Optic (AWO) excels at maximizing light projection even farther to create a soft gradient illumination with remarkable uniformity in deeper coves. The AWO's optimal performance is achieved with fixture placement at 10"-36" from the ceiling. Its peak intensity angle from nadir is at 107°, creating a true asymmetric optic that aims light exactly where needed.



Four precision optics give Evoq and Evoq Slim the flexibility to shape light. Choose asymmetric distributions for directional performance, or symmetric optics for balanced, uniform ceiling illumination.

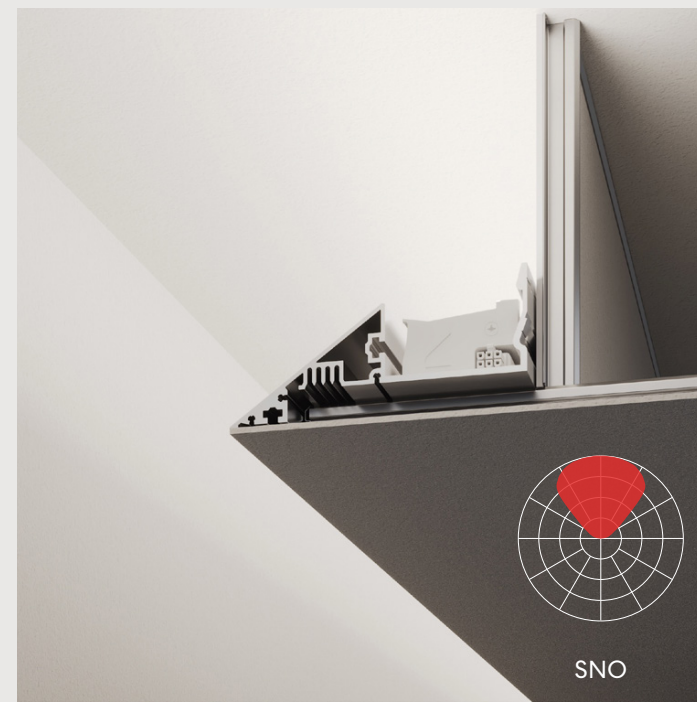

SNO

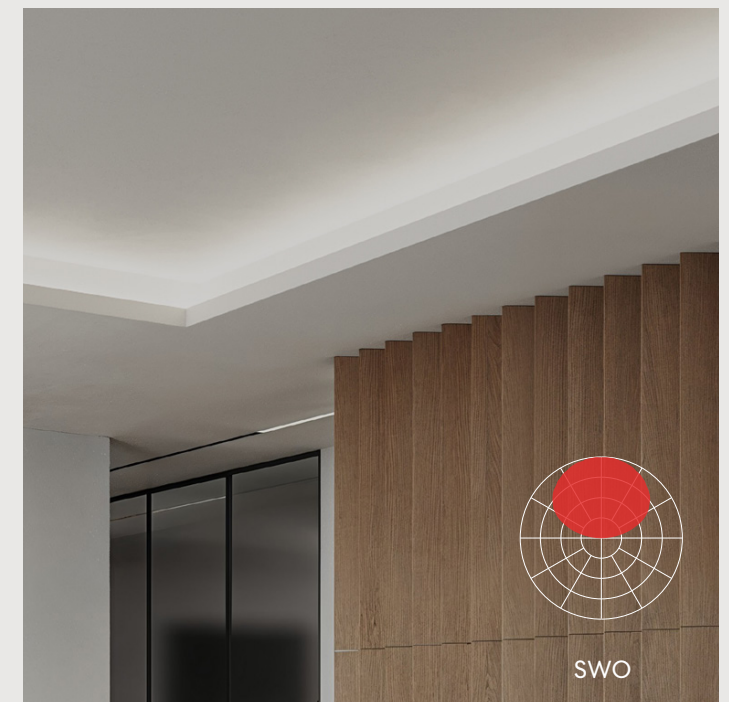

SWO

Symmetric Narrow Optic

Engineered for pure indirect performance, the Symmetric Narrow Optic (SNO) delivers a 98° beam that blankets ceilings in uniform, comfortable light. Refined through a precision de-glare low profile optic, it can produce luminous ceilings with virtually zero glare.


Symmetric Wide Optic

Designed for flawless indirect illumination, the Symmetric Wide Optic (SWO) delivers a remarkably broad 145° beam that floods ceilings with soft, even light. Powered by a precision acrylic optic with laser-etched diffusion, it emits over 96% of its lumens upward, creating luminous ceilings free from glare or harsh contrast.



EVOQ NANO

Optic



NAO

Nano Asymmetric Optic

Evoq Nano's dedicated asymmetric optic (NAO) directs light across the illuminated surface from shallow cove conditions. The result is controlled, predictable distribution from an ultra-compact luminaire designed for close integration with the architecture.

True
Asymmetric
Optics

Controlled
Distribution
in the Tightest
Spaces



Featured Product
Evoq Nano, Patterns, Inside Corners,
Nano Asymmetric Optic
Fixture with Mounting Brackets



Color Temperatures & Static Colors

Whether you prefer custom CCT ranges or our preset selections, you're in control. Choose the perfect color temperature for your space, crafting an ambiance that's captivating and tailored to your needs. Our tunable white lighting enhances visual comfort, functionality, and the well-being of occupants, making it lighting that's both effective and comfortable.

Customizable CCT Options

STATIC WHITE — ALL MODELS

COLOR TEMPERATURES

- 2200K
- 2700K
- 3000K
- 3500K
- 4000K
- 5000K
- 6500K

Custom CCT Ranges

HEALTH & WELL-BEING

High EML/CS Options

EVOQ & EVOQ SLIM


COLORS

- Static Colors

TUNABLE WHITE (DUO)
CUSTOM RANGE SELECTION



DIM TO WARM (SOLA)
CUSTOM RANGE SELECTION



Dynamic Adaptability

EVOQ ONLY

RGBW





Colorful Ambiance

Sculpting Spaces with Cove Light

Evoq's RGBW option transforms ambiance in both functional and aesthetic ways. Color in cove lighting adds an elegant, subtle layer of accent illumination—warm hues creating intimacy, cooler tones expanding the sense of space.

FEATURING



Field
Curvable
Ramp



Patterns
Curved
Corners



Evoq Collection Configurations

The Evoq Collection offers linear runs and straight-corner patterns across all three models, with curved configurations available for Evoq and Evoq Nano.

ALL MODELS

Countless
Cove Shapes

ALL MODELS

Patterns
With Straight
Corners

EVOQ AND EVOQ NANO*

Patterns
With Curved
Corners

*Consult factory for Evoq Nano curved-corner configurations.



Evoq Fixture
Asymmetric Wide Optic (AWO)
350 lm/ft, 6500K to 2700K

HKS Office
Location: Washington, DC, U.S.
Designer: HKS
Photographer: Garrett Rowland
Certifications: LEED, WELL



Evoq Fixture
Asymmetric Wide Optic (AWO)
3000K

Three Embarcadero Center
Location: San Francisco, California, U.S.
Designer: Schuler Shook
Photographer: Jason O'Rear



ALL MODELS

Straight Coves

Linear runs and straight-corner patterns are available across all three Evoq models, including standard shapes and custom configurations.

Simple & Complex
Patterns

Inside & Outside
Corners


Linear
Runs

Patterns with Straight Corners

STRAIGHT CONFIGURATIONS, OUTSIDE CORNERS (COMMON SHAPE EXAMPLES)




Square



U-shape



L-shape




Rectangle


STRAIGHT CONFIGURATIONS, INSIDE CORNERS (COMMON SHAPE EXAMPLES)




Square



U-shape



L-shape



Rectangle



EVOQ & EVOQ NANO*

Curved Cove

Create flowing patterns and integrated curved corners with Evoq's factory-built and field-curvable mounting options. Curved patterns are also available with Evoq Nano (consult factory for details).

Simple & Complex Patterns

Inside & Outside Corners


Factory-Built Curved Mountings

Field-Curvable Mounting

*Consult factory for Evoq Nano curved-corner configurations.

Patterns with Curved Corners


Minimum radius 15"

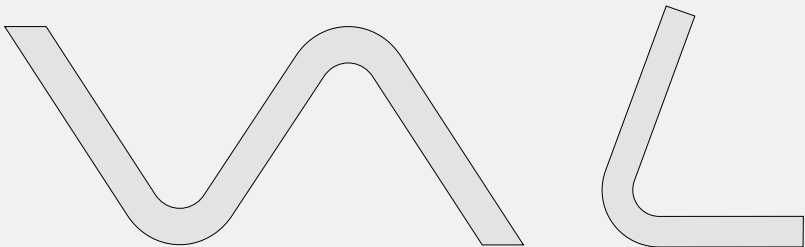

CURVED CONFIGURATIONS, OUTSIDE CORNERS (COMMON SHAPE EXAMPLES)



Curved Square



Circle¹



Curved Rectangle



Curved U-shape



Curved L-shape



Arc²


CURVED CONFIGURATIONS, INSIDE CORNERS (COMMON SHAPE EXAMPLES)



Curved Square



Circle¹



Curved Rectangle



Curved U-shape



Curved L-shape



Arc²

¹ Minimum Ø 48" ² Minimum radius 24"



Credits
Owner: LEGO Group
Architect: BDG Architecture + Design
Lighting Design: Lux Collaborative
Construction Management: Structure Tone
Electrical Contractor: J & M Brown Company, Inc.

Evoq Fixture
Evoq, Asymmetric Wide Optic (AWO),
750 lm/ft, 3500K
Ramp Profile
CRV2: Curved Ramp Flat Edge,
Curved Structures



Evoq Collection Mountings

Evoq Collection ramps serve as prebuilt cove structures that can be easily integrated into ceilings or walls. All ramp options are field-cutable and meticulously fit various designs of all shapes and patterns: straight, curved, or linear runs. They come in Mud-in, Direct Mount, or Field-Curvable options and they ensure quick and cost-effective cove installation. Evoq can also be integrated into existing coves as standalone fixtures.

ALL MODELS

Mud-In
Ramps

EVOQ ONLY

Direct Mount
Ramps

Air Return
Integration Option

Field-Curvable
Ramps


Gasketed Clear
Cover Option



Featured Product
Evoq Fixture
Direct Mount Ramp: DM1 Flat Edge



15+ Mounting Options

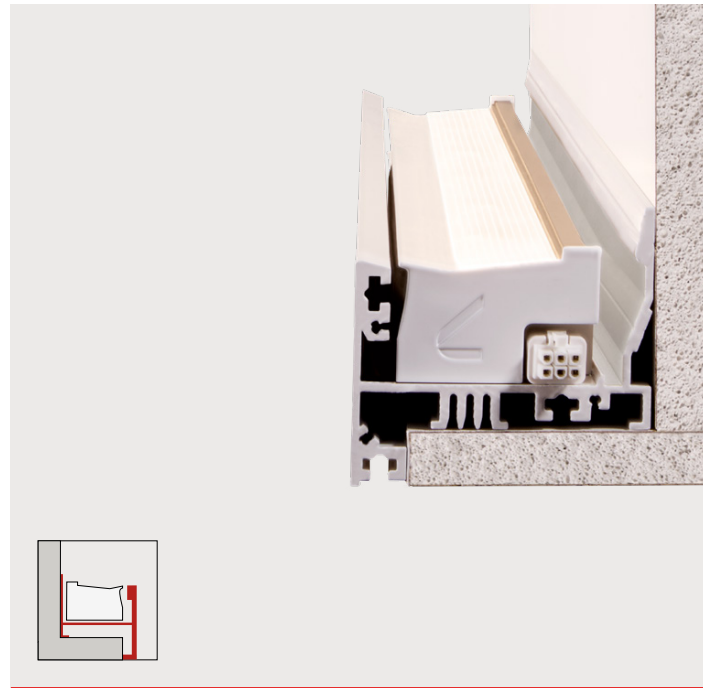

Mud-in Ramps

Evoq Collection Mud-in ramps seamlessly integrate cove lighting into ceilings or walls. They serve as prebuilt cove structures. The ramp profiles are plastered-in and painted for a clean, polished ceiling appearance. The ramps are field-cuttable to ensure a perfect fit.

RAMP PROFILES • ALL MODELS

- **FE1** Flat Edge
- **KE1** Knife Edge 35°

RAMP PROFILES • EVOQ ONLY

- **FE2** Flat Edge with Air Return
- **KE1** Knife Edge 35°
- **WCA** Wall Cove with Adjustable Brackets
- **CKE1** Curved Ramp With Knife Edge for Straight Structures
- **CKE2** Curved Ramp With Knife Edge for Curved Structures
- **CRV1** Curved Ramp Flat Edge: Straight Structures
- **CRV2** Curved Ramp Flat Edge: Curved Structures

Direct Mount Ramps

Evoq Direct Mount ramp options provide hassle-free, cost-effective cove lighting installations with prebuilt profiles that serve as stunning architectural cove details. The ramps are field-cuttable to ensure a perfect fit. Their streamlined finish elevates spaces and creates a clean ceiling aesthetic.

RAMP PROFILES • EVOQ ONLY

- **DM1** Flat Edge
- **DM2** Flat Edge with Gasketed Clear Cover
- **DM3** Flat Edge with Adjustable Brackets



Field-Curvable Ramps

The Field-Curvable ramps are the most flexible and customizable mud-in mounting options within the Evoq collection. They are adjustable on-site to match the curved or straight contours of the wall/ceiling structure. They require plastering and painting.

RAMP PROFILES • EVOQ ONLY

- **FC1** Field-Curvable Corners with Non-Field-Curvable Sections
- **FC2** Field-Curvable Ramp
- **FCS** Flat edge compatible with field-curvable sections
- **FCKE1** Field-curvable corners with non-field-curvable straight sections with knife edge
- **FCKE2** Field-curvable ramp with knife edge
- **FCKES** Knife edge compatible with field-curvable sections

Additional Options

All three Evoq models in the collection can be integrated into existing coves as standalone fixtures.



EVOQ ONLY

Field-Curvable Ramps

The Field-Curvable ramps are the most flexible and customizable mud-in mounting options within the Evoq Collection. The ramps are adjustable on-site to match the curved or straight contours of the wall/ceiling structure. They provide a streamlined and uniform architectural cove design suitable for new construction or remodeling projects. Available as Flat Edge or Knife Edge profiles.

Adjustable for
Complex Cove
Design

Easy
Installation



NEW

Field-Curvable
Knife Edge
Ramp Options



Lumenwerx Cove Systems at a Glance


Find the Right Cove System for your application.



	EVOQ	EVOQ SLIM	EVOQ NANO	ALCOVE
COVE APPLICATION	Maximum design freedom, including curved and complex cove configurations	Shallow coves requiring optical flexibility and higher-output options	The tightest coves and concealed details where compact size and optical control are critical	Field-aimable cove applications requiring adjustable distribution
OPTICAL & LIGHT PERFORMANCE				
OPTICAL DISTRIBUTIONS	Asymmetric Narrow Optic (ANO) Asymmetric Wide Optic (AWO) Symmetric Narrow Optic (SNO) Symmetric Wide Optic (SWO)	Asymmetric Narrow Optic (ANO) Asymmetric Wide Optic (AWO) Symmetric Narrow Optic (SNO) Symmetric Wide Optic (SWO)	Nano Asymmetric Optic (NAO)	Adjustable Asymmetric Projecting Optic (APO)
FIELD AIMING	Optional Field Adjustment ±30° with WCA, DM3, or ADJ mounting	Fixed	Fixed	Field Adjustable Precise Aiming in 5° Increments Peak Angle Adjustable by up to 60° In-Field
OPTIMAL FIXTURE-TO-CEILING DISTANCE	ANO: 6"–12" SNO: 8"–12" AWO, SWO: 10" to 36"	ANO: 6"–12" SNO: 8"–12" AWO, SWO: 10" to 36"	NAO: 5"–16"	APO: 8" minimum
AVAILABLE OUTPUT PACKAGES	350, 500, 750, 1000, 1200 lm/ft	350, 500, 750, 1000 lm/ft	150, 250, 350, 500 lm/ft	350, 550, 750, 950, 1200 lm/ft
EFFICACY	Up to 104 lm/W	Up to 103 lm/W	Up to 61 lm/W	Up to 134 lm/W
LIGHT & COLOR OPTIONS	Static White Dim to Warm (Sola) Tunable White (Duo) RGBW (Quadro)	Static White Dim to Warm (Sola) Tunable White (Duo)	Static White	Static White Dim to Warm (Sola) Tunable White (Duo)
CRI OPTIONS	80+, 90+, 95+	80+, 90+, 95+	80+, 90+	80+, 90+
SYSTEM FLEXIBILITY & INSTALLATION				
FIXTURE PROFILE	2 5⁄16" W × 1 1⁄16" H	1-7⁄8" W x 3⁄4" H	1" W x 7⁄16" H	4" W × 1 15⁄16" H
LENGTH OPTIONS	12", 18", 48" Modules	6" length increments up to 8'	6" length increments up to 8'	Individual sections from 2' to 12' Continuous runs
DRIVER LOCATION	Integral (Remote for RGBW)	Remote	Remote	Integral / Accessible within luminaire
MOUNTING / COVE INTEGRATION	15+ MOUNTING OPTIONS Mud-in Ramps: Flat Edge, Flat Edge with Air Return, Knife Edge 35°, Wall Cove with Adjustable Brackets, Curved Ramp with Flat Edge, Curved Ramp with Knife Edge (Factory-Curved Options) Field-Curvable Ramps: Field-Curvable Ramp Flat Edge, Field-Curvable Ramp Knife Edge Direct Mount Ramps: Flat Edge, Flat Edge with Gasketed Cover, Flat Edge with Adjustable Brackets Others: Standalone Fixture, Standalone Fixture Adjustable Brackets with Mounting Rail	3 MOUNTING OPTIONS Mud-in Ramps: Flat Edge, Knife Edge 35° Others: Standalone Fixture	3 MOUNTING OPTIONS Mud-in Ramps: Flat Edge, Knife Edge 35° Others: Standalone Fixture with Mounting Brackets	3 MOUNTING OPTIONS Mud-in Ramps: Flat Edge, Knife Edge 35° Others: Standalone Fixture with adjustable mounting bracket



EVOQ COLLECTION
BROCHURE



EVOQ COLLECTION
ONLINE



ALWAYS LIGHT
RIGHT

lumenwerx.com
R.08.2026