



FORTEX1 in-out

WALL MOUNT/SURFACE MOUNT - INSTRUCTIONS


IMPORTANT: Installation instructions are shown with 4ft Fortex 1 in-out and applies to all Fortex 1 in-out sizes

NOTE: Wire dimming conductors as Class 1


DIMENSIONS BETWEEN MOUNTING POINTS

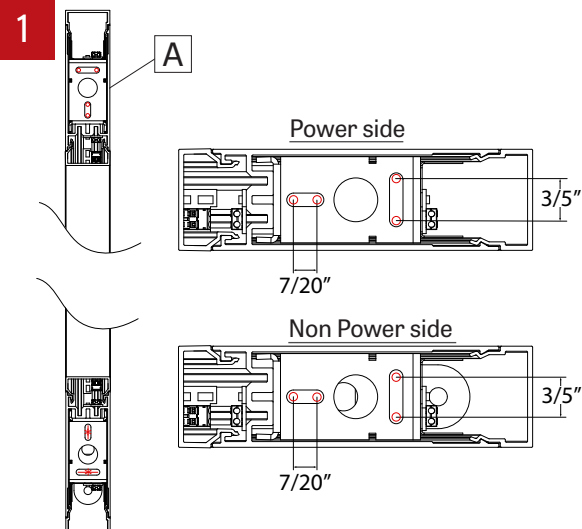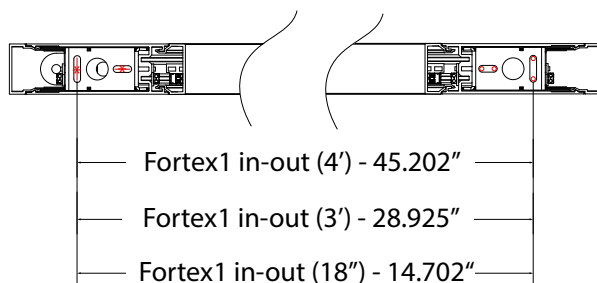


Locate mounting points [*] on the wall or surface according to the client drawings.

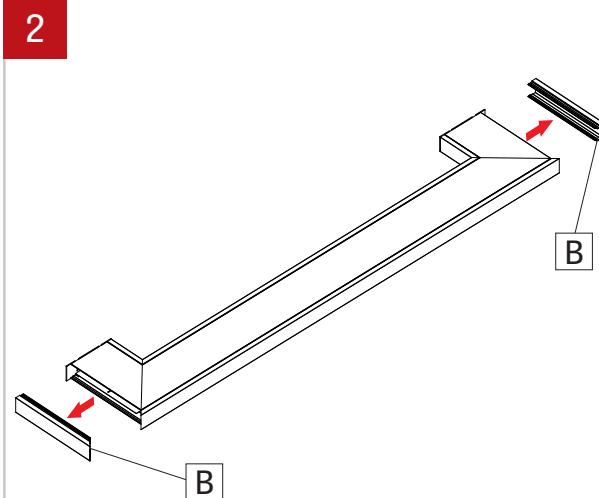


Remove lenses (B) and place them in a safe place.

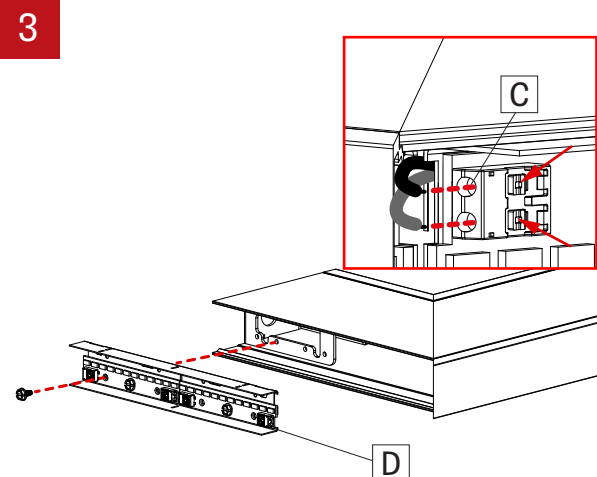

Disconnect LED molex connector (C) by taking a pointed object and pressing on the two tabs on the top. Unscrew and remove LED cartridge (D) to get access to the wall bracket.

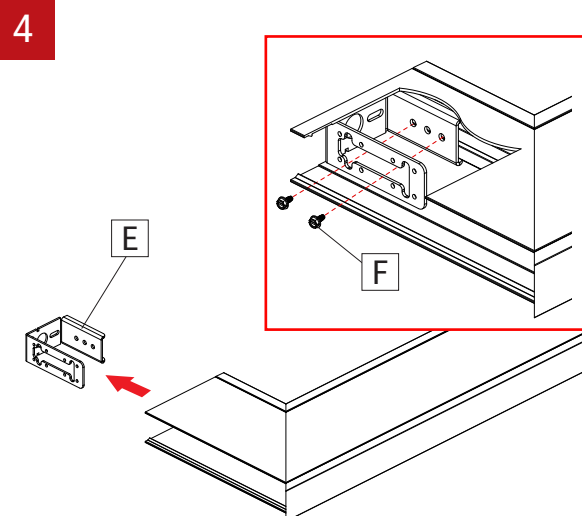


To remove the wall bracket (E) from the fixture untighten the screws (F).

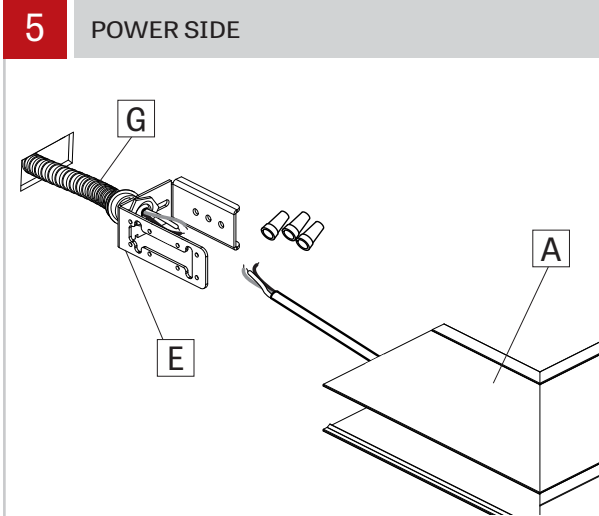


Pass the flexwhip through the wall bracket (E) and make electrical connection between fixture (A) and main power (G).

6 NON POWER SIDE

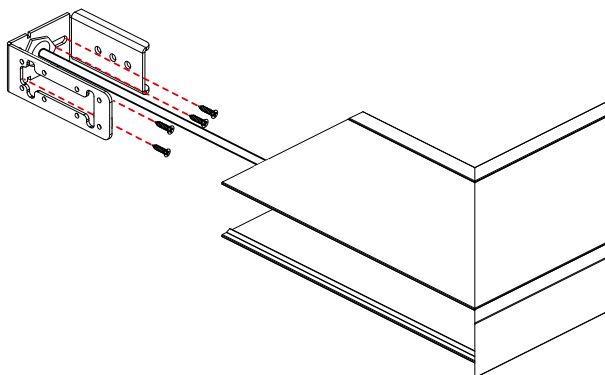


Screw the wall bracket (E) to the wall using anchors.

7

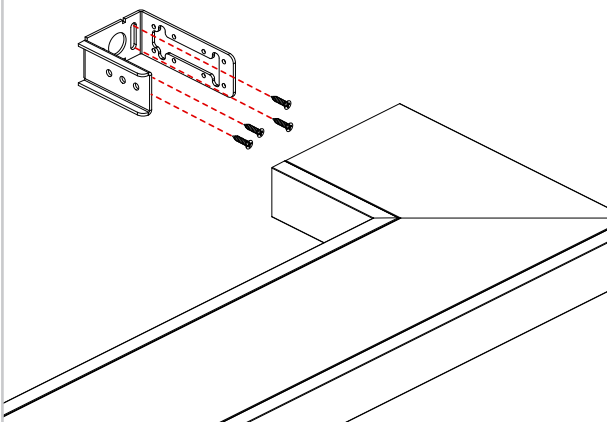


Screw the wall bracket (E) to the wall using anchors.

8

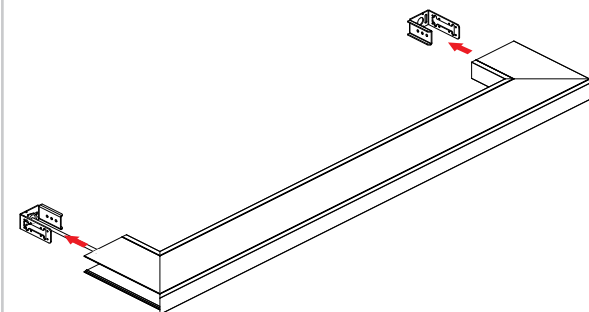


Align and place the fixture (A) on the wall brackets (E).

9

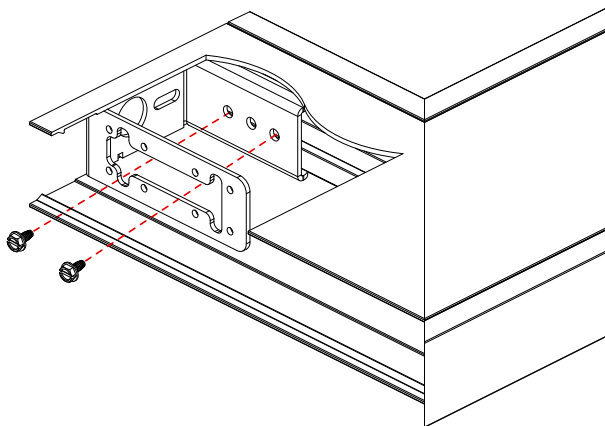


Put back in place screws (F) to attach the fixture (A) to the wall bracket (E).

10

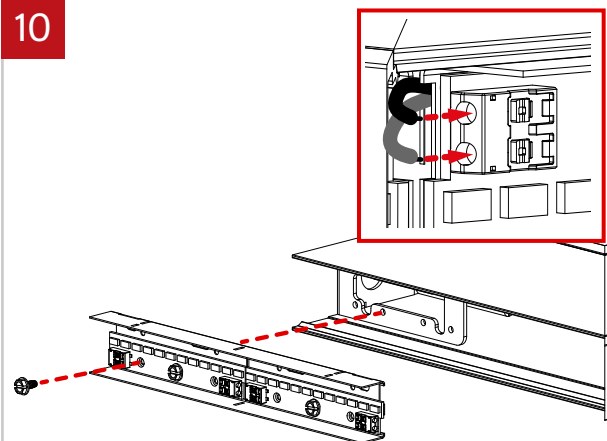

Reconnect LED molex connectors (C) to the cartridge (D). Screw back in place LED cartridge (D).

11

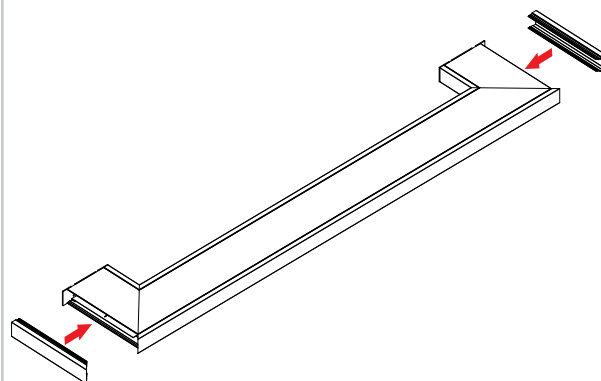

Put back in place lenses (B).