


REVEN-CAMBER-SMILE SIB

PENDANT STEM- INSTALLATION

IMPORTANT: Installation instructions are shown with Reven and applies to Reven, Camber and Smile fixtures


NOTE: Wire dimming conductors as Class 1

1 SINGLE FIXTURE

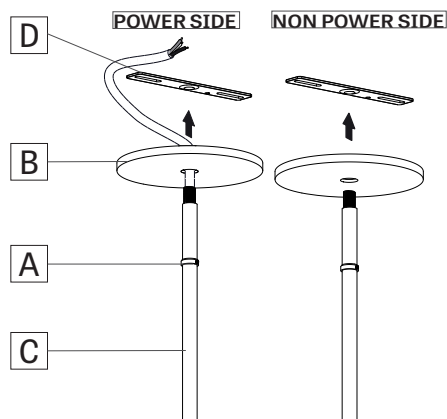


Make sure that the power to the fixture is turned off. Slide the slip ring (A) and the canopy (B) onto the stem (C) and leave some space. Screw the junction box crossbar (D) onto the stem (C).

2 FOR EMERGENCY CIRCUIT

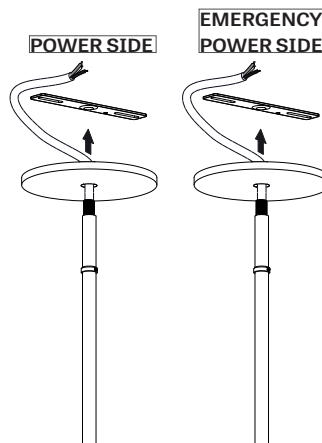


In the case where an **emergency circuit** is required, the wires to the emergency circuit will be passed through a second stem.

3 FOR FIXTURE IN GRID CEILING

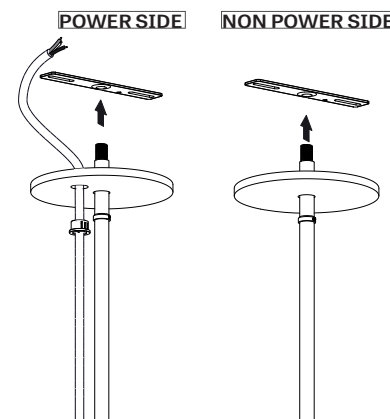


In the case where the luminaire is installed on a **grid ceiling**, the power cable will pass outside of the stem.

4

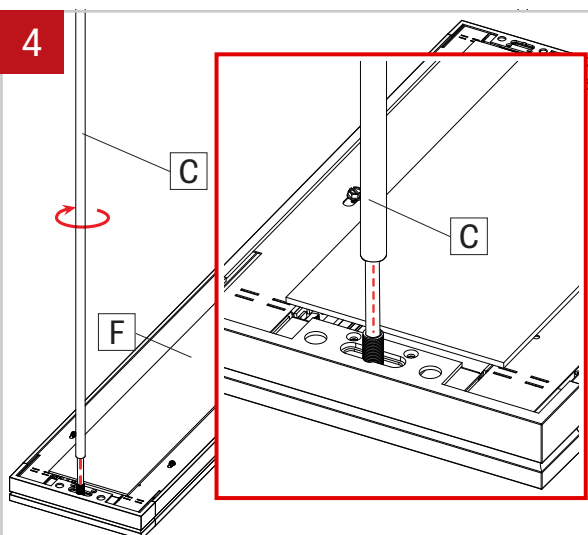


Screw the stems (C) onto the nipple at the ends of the fixture (F).

5 POWER SIDE

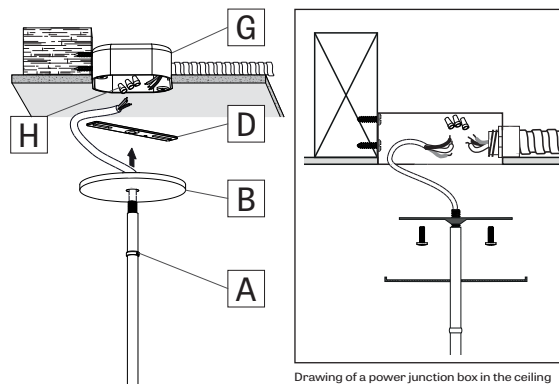


Raise the fixture and tighten the junction box crossbar (D) with screws (by others) to the junction box (G). Make wire connection with wire connectors (H). Then slide the canopy (B) and tighten the set up with the slip ring (A).

6 NON-POWER SIDE

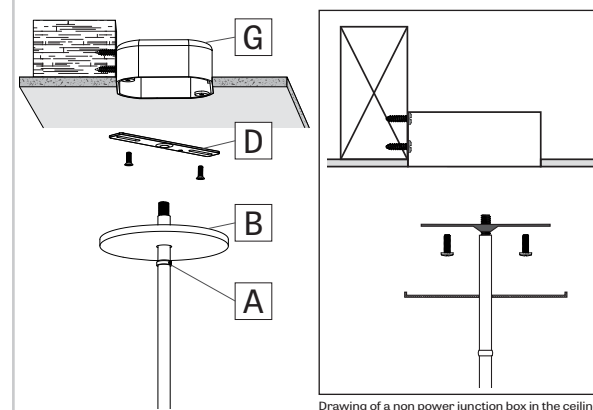


Raise the fixture and tighten the junction box crossbar (D) with screws (by others) to the junction box (G). Then slide the canopy (B) and tighten the set up with the slip ring (A).


7 CONTINUOUS SYSTEM

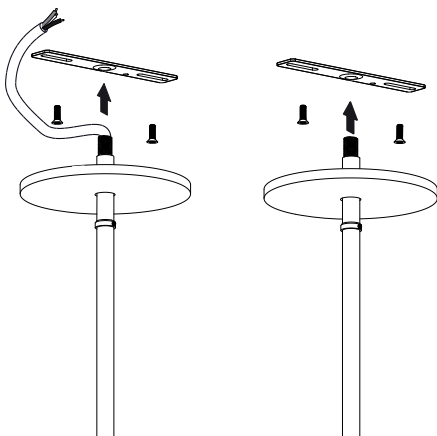


For a continuous system, repeat steps 1 to 3 for all mounting hardware.

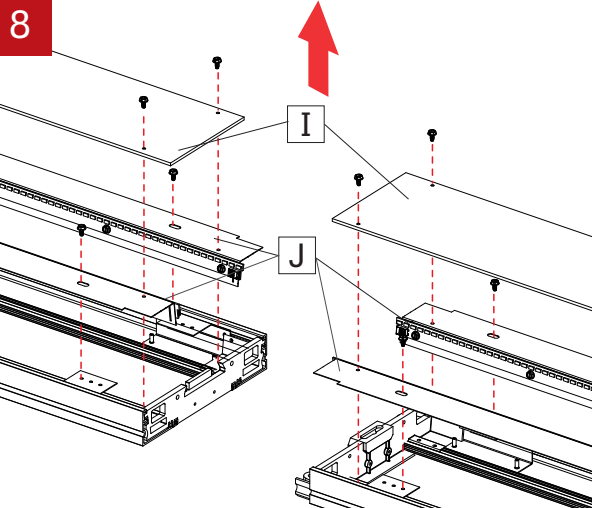


Remove the dust covers (I) (if provided) and the reflectors (J) using the included tool. Repeat for all fixture in the run.

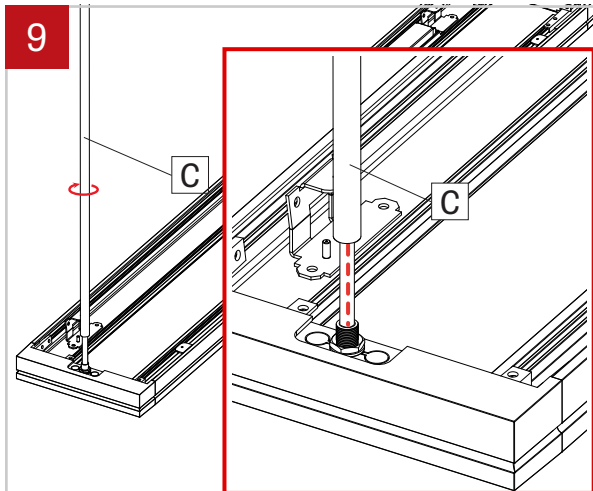


Screw the stems (C) at the ends of the first two fixtures.

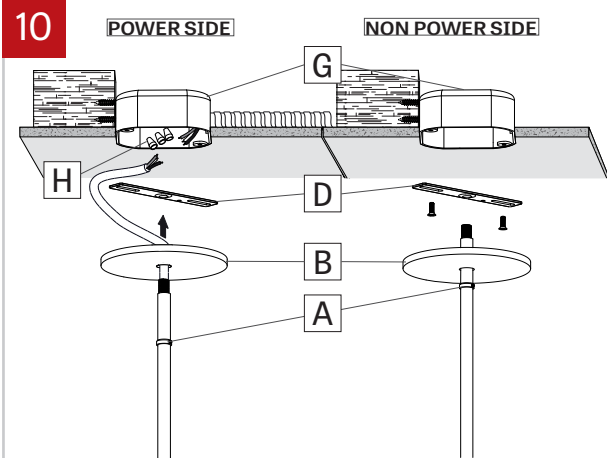

Raise the fixtures and tighten the junction box crossbars (D) with screws (by others) to the junction boxes (G). Make wire connection on the power side with wire connectors (H). Then slide the canopies (B) and thighten the sets up with the slip rings (A).

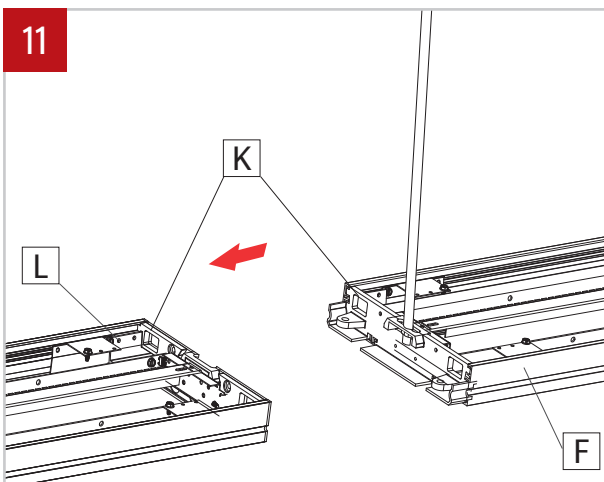

Align the joiners (K) at the end of the fixtures (F) and (L) and connect them.

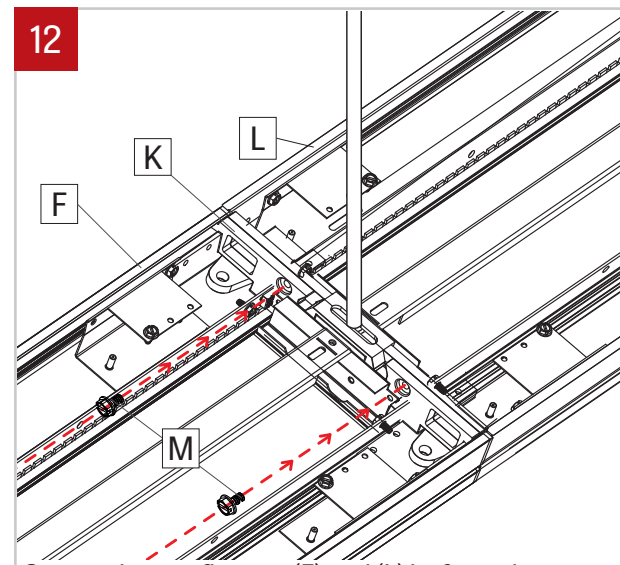

Secure the two fixtures (F) and (L) by fastening security screws (M) to the joiners (K).

REVEN-CAMBER-SMILE SIB

PENDANT STEM- INSTALLATION

