


QUAD N-W FLUORESCENT

PENDANT STEM - INSTALLATION

IMPORTANT: Installation instructions are shown with Quad Narrow and applies to all Quad sizes


NOTE: Wire dimming conductors as Class 1

1 SINGLE FIXTURE

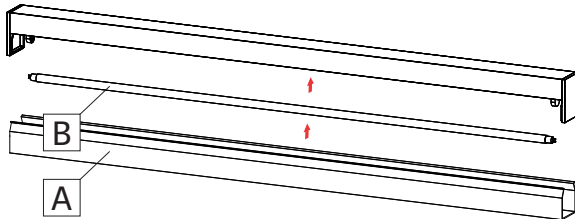

Remove the lens (A) and place it in a safe place. Install the lamp (B) and put the lens (A) back in place.


2

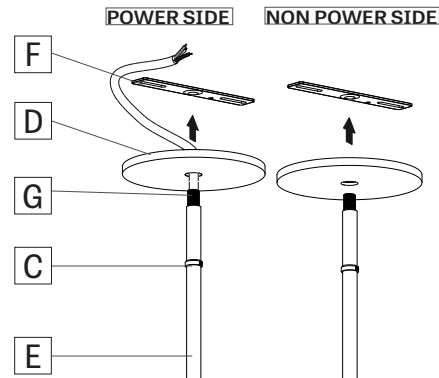

Make sure that the power to the fixture is turned off. Slide the slip ring (C) and the canopy (D) onto the stem (E) and leave some space. Screw the junction box crossbar (F) with the threaded rods (G) onto the stem (E).


3

FOR EMERGENCY CIRCUIT

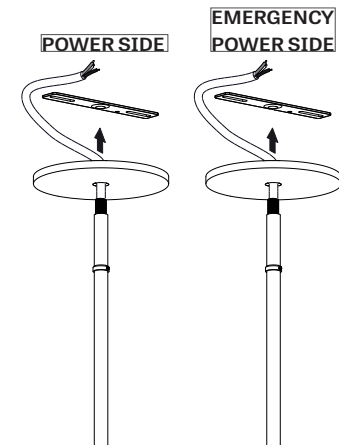


In the case where an **emergency circuit** is required, the wires to the emergency circuit will be passed through a second stem.

4 FOR FIXTURE IN GRID CEILING

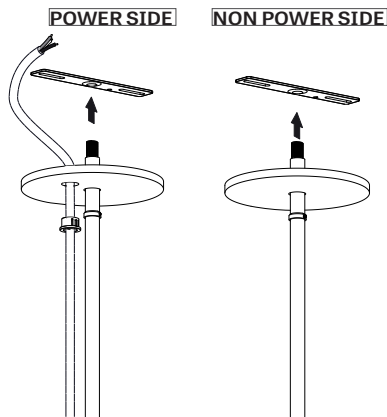

In the case where the luminaire is installed on a **grid ceiling**, the power cable will pass outside of the stem.


5

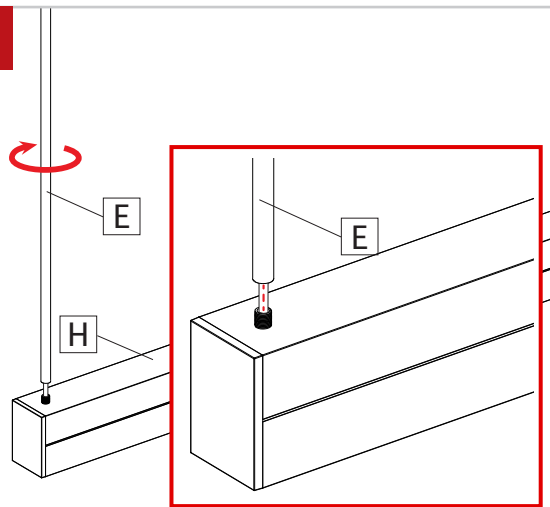

Screw the stems (E) onto the nipple at the ends of the fixture (H).

6

POWER SIDE

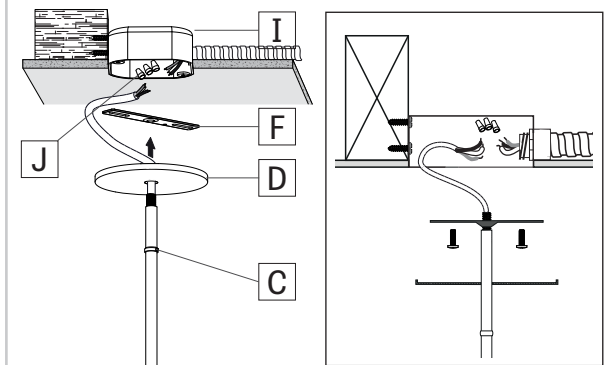


Drawing of a power junction box in the ceiling

Raise the fixture and tighten the junction box crossbar (F) with screws to the junction box (I). Make wire connection with wire connectors (J). Then slide the canopy (D) and tighten the set up with the slip ring (C).

QUAD N-W FLUORESCENT

PENDANT STEM - INSTALLATION


7 NON-POWER SIDE

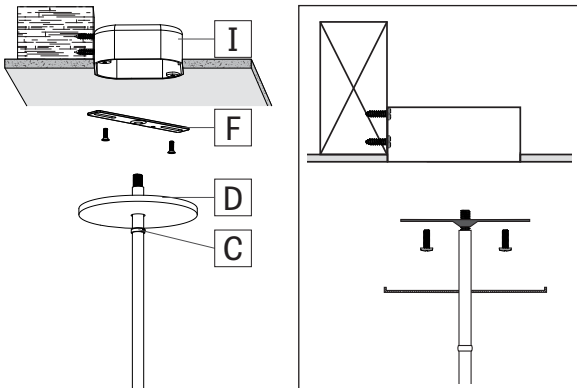

Drawing of a non power junction box in the ceiling


Raise the fixture and tighten the junction box crossbar (F) with screws to the junction box (I). Then slide the canopy (D) and tighten the set up with the slip ring (C).

8 CONTINUOUS SYSTEM

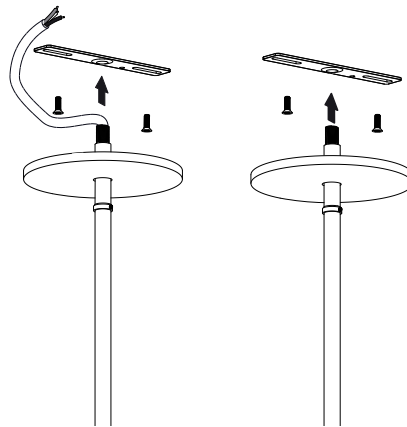


For a continuous system, repeat steps 2 to 4 for all mounting hardware.

9

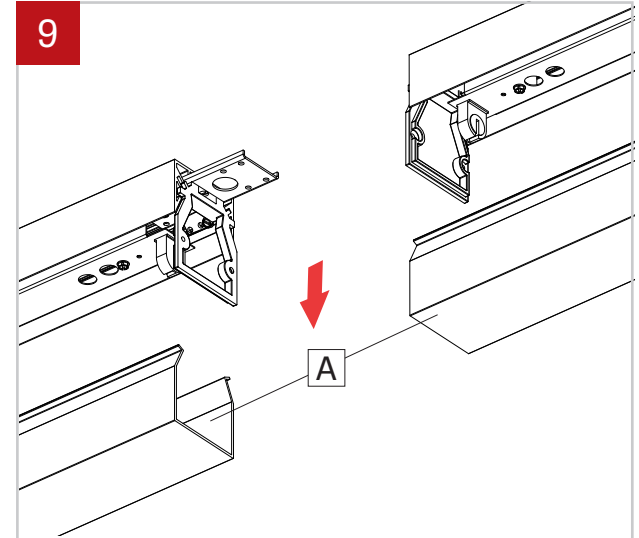


Remove lens (A) using the included lens tool. Repeat for all fixtures in the run.

10

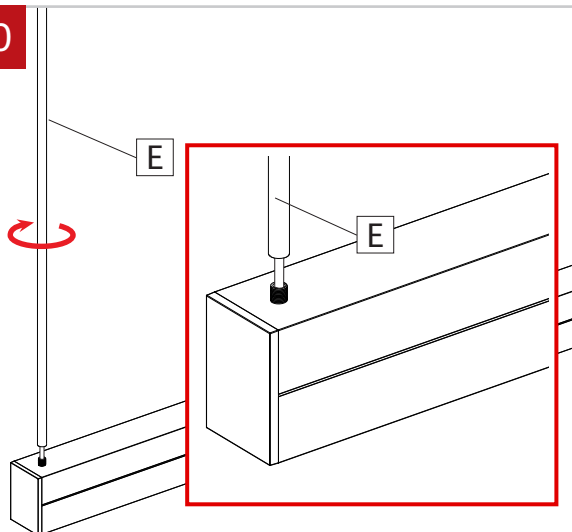


Screw the stems (E) at the end of the first two fixtures and on the hanger of the joiner.

11

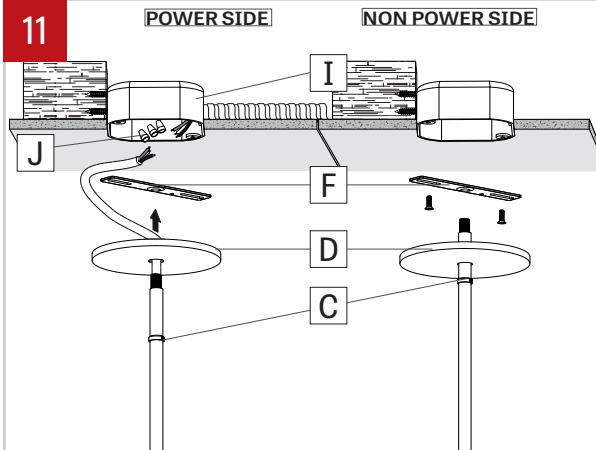

Raise the fixtures and tighten the junction box crossbars (F) with screws to the junction boxes (I). Make wire connection on the power side with wire connectors (J). Then slide the canopies (D) and tighten the sets up with the slip rings (C).

12

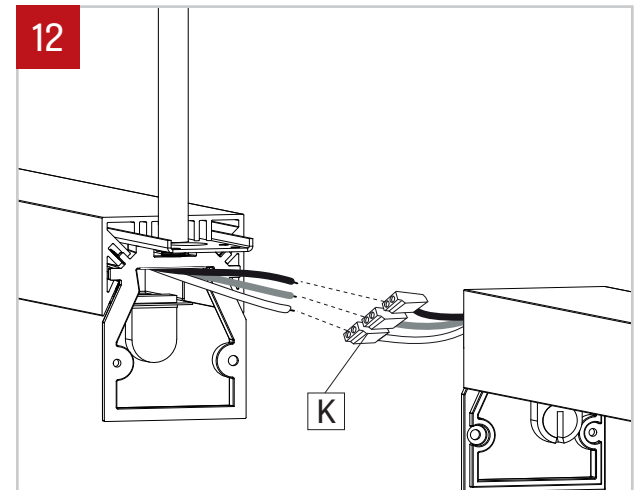


Connect wires between joining fixtures using quick connectors (K).

QUAD N-W FLUORESCENT


PENDANT STEM - INSTALLATION

13

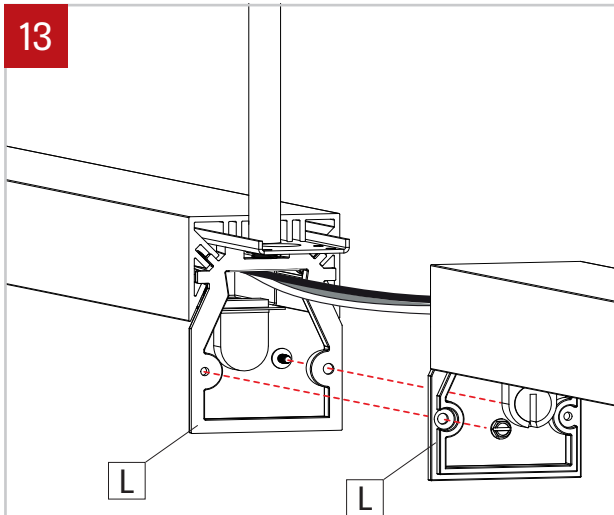

Align fixtures and attach them by fastening screws on the joiners (L). Repeat steps 8 to 11 for all others fixtures.

14

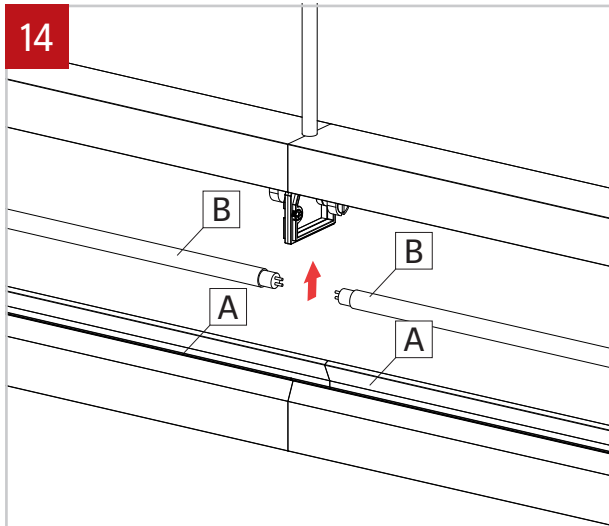

Install the lamps (B) and the lenses (A).