


**IMPORTANT:** Installation instructions are shown with Quad Narrow and applies to all Quad sizes

**NOTE:** Wire dimming conductors as Class 1




Reflector must be reinstalled with the screw and plastic washer that was originally supplied. If not, it can result in an electrical failure

Make sure to reconnect the wires to the LED boards correctly

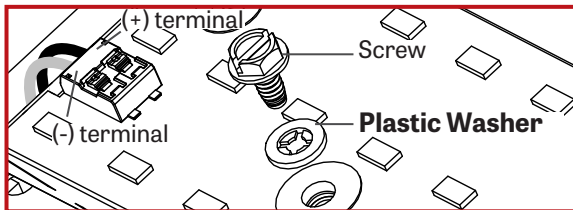


1

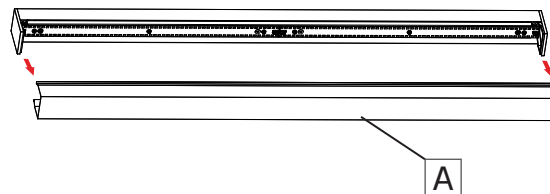


Make sure the power to the fixture is turned off. Remove the lens (A).

2

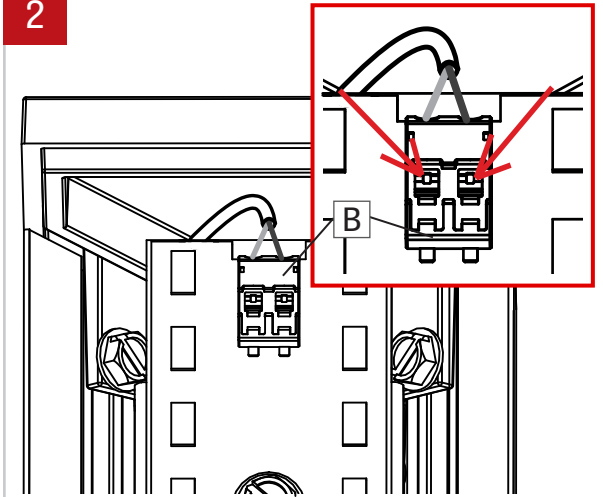


Disconnect LED mox connector (B) by taking a pointed object and pressing on the two tabs on the top.

3

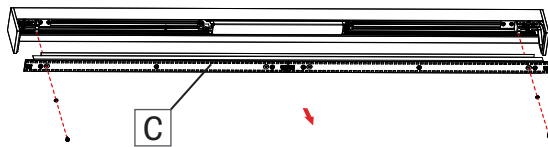


Unscrew the cartridge (C) and remove it from the fixture.

4

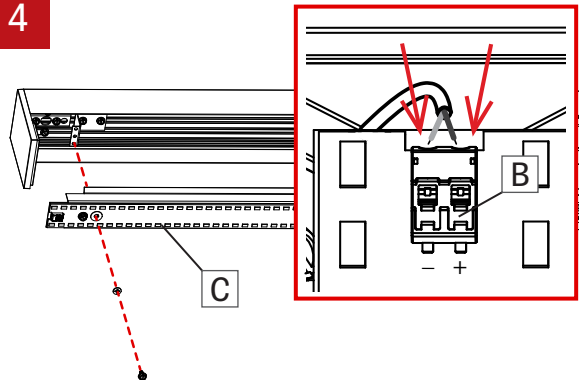

Replace the cartridge (C) by using **screws and plastic washers**. Do not apply too much pressure. Reconnect the LED connector (B). **NOTE: connect white wire into the negative (-) terminal and the black wire into (+) positive terminal.** Make sure that the wires are not hiding any LED diode. Screw the cartridge back in place.

5

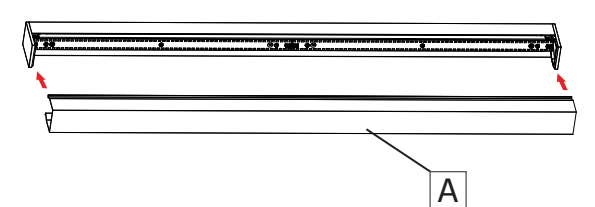

Reinstall the lens (A).